

NOBLE ENERGY INC.
 FOSS 14-43
 SWSE 14-6N-64W
 498 FSL & 2162 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 7/13/2016

API: 05-123-26500
 COGCC #

GL Elev: 4675'
 KB Elev: 4687'


Spud Date:

Surface Casing :
 8-5/8" 24# @ 461'
 Cement: 250
 TOC: Surface

TOC @ 70'

Nio Top 6516'

Production Casing :
 4-1/2" 11.6# M-80 @ 7023'
 Cement: 1230
 TD: 11/27/2007

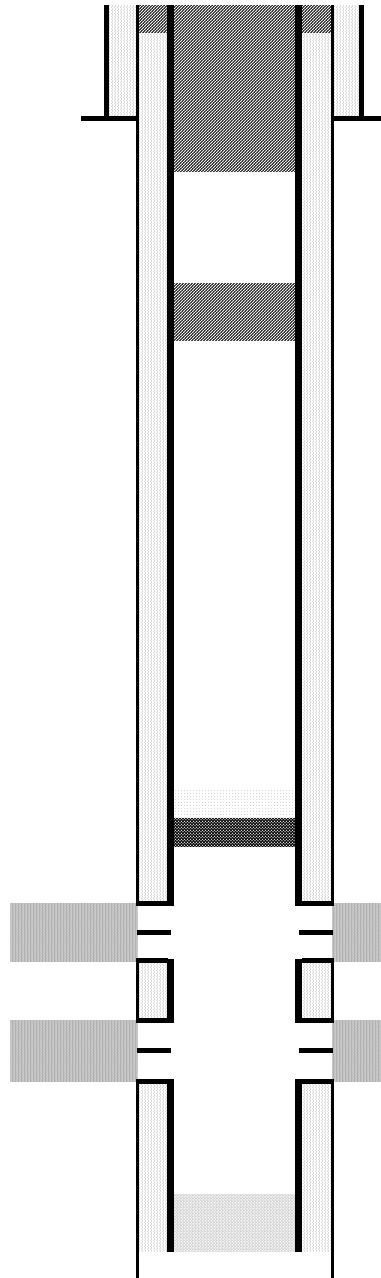

Cut surface casing off 6'-8' below surface.

Pump approx 43 sx shoe plug @ 561'
 Will bring cement to surface.

Pump 50 sx balance plug @ 2500'
 (TOC @ ~1841')

CIBP @ 6500' w/ 2 sx cement on top

Niobrara Perforations:
 6550'-6566'; 6668'-6684'

Codell Perforations: 6834'-6847'

TD: 7050'