

NOBLE ENERGY INC.
 FOSS 14-44
 SESE 14-6N-64W
 529 FSL & 711 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 7/25/2016

API: 05-123-26499
 COGCC #

GL Elev: 4667'
 KB Elev: 4679'


Spud Date:

Surface Casing :
 8-5/8" 24# @ 438'
 Cement: 250
 TOC: Surface

TOC @ 66'

Nio Top 6652'

Production Casing :
 4-1/2" 11.6# M-80 @ 7174'
 Cement: 1330
 TD: 12/2/2007

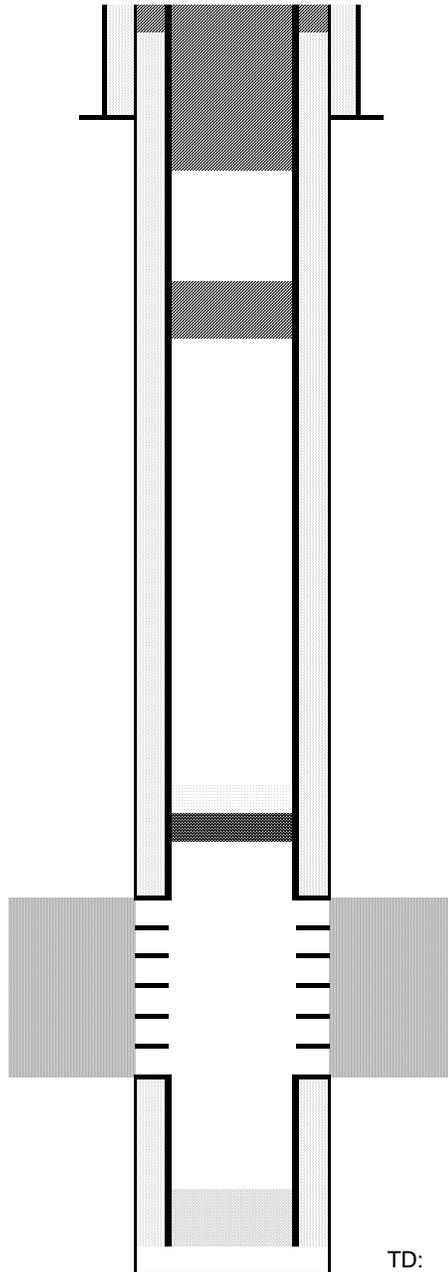

Cut surface casing off 6'-8' below surface.

Pump approx 41 sx shoe plug @ 538'
 Will bring cement to surface.

Pump 50 sx balance plug @ 2500'

CIBP @ 6762' w/ 2 sx cement on top

Niobrara Perforations: 6812'-6824'

Codell Perforations: 7068'-7082'

TD: 7175'