

**NOBLE ENERGY INC.**  
 Larson A25-03X  
 NENW 25-6N-64W  
 500' FNL & 1800' FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 7/26/2016

API: 05-123-26476  
 COGCC #

GL Elev: 4637'  
 KB Elev: 4647'

**Spud Date:** 11/7/2007

**Surface Casing :**

8 5/8" 24# @ 778'  
 Cement: 403 sx  
 TOC: Surface


**TOC @ 2050'**

**Nio Top 6486'**

**Production Casing :**

4 1/2" 11.60# M-80 @ 6954'  
 Cement: 960 sx  
 TD: 6975'

**Auto cemtn Plug: 6915'-6947'**

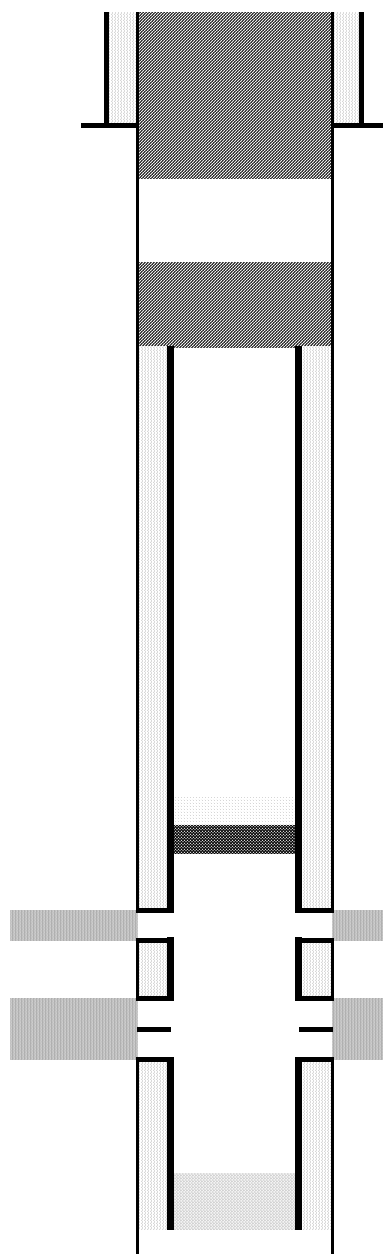

Cut surface casing off 6'-8' below surface.

Pump approx 271 sx shoe plug @ 878'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2050'

CIBP @ 6583' w/2 sx cement on top

Niobrara Perforations 6633' - 6717'

Codell Perforations 6792' - 6804'

TD: 6975'