

NOBLE ENERGY INC.
 Spike State GWS D28-03
 NENW 28-3N-64W
 537 FNL & 2087 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 6/13/2016

API: 05-123-15987

KB Elev: 4830'
 GL Elev: 4820'


Spud Date: 8/10/1992

Surface Casing :
 8 5/8", 24# @ 551;
 Cement: 385 sx
 TOC: Surface

TOC @ 3986'

TOC @ 5932'

Production Casing :
 3 1/2", 9.3#, N-80 @ 7153'
 Cement: 625 sx
 Run Date: 8/14/1992

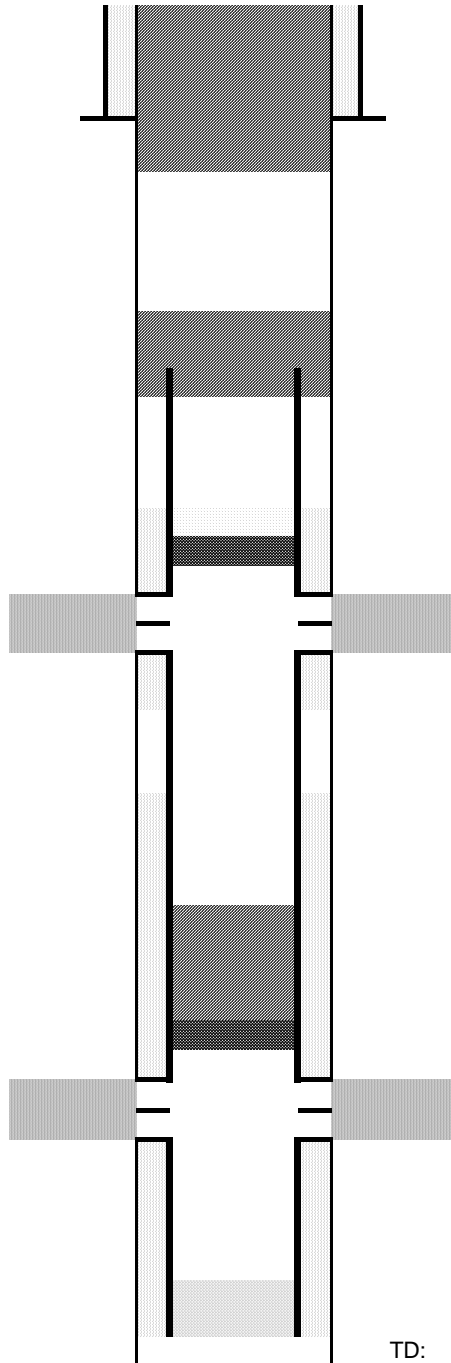

Cut surface casing off 6'-8' below surface.

Pump approx 280 sx shoe plug @ 759'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 4321' w/ 2 sx cement on top

Sussex Perforations: 4371' - 4400'

Pump 15 sx balance plug from 6924' - 6596'
 CIBP @ 6924'

Codell Perforations: 6974' - 6984'

TD:

7167