

NOBLE ENERGY INC.

Reinick 02
NWNE 9-4N-64W
660 FNL & 1980 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
7/28/2016

API: 05-123-11923
COGCC #

GL Elev: 4705'
KB Elev: 4718'


Spud Date: 9/11/1984

Surface Casing :
8 5/8" 24#, @ 435'
Cement: 300 sx
TOC: Surface

FH Depth= 345'
Deepest Water Well = 375'

TOC @ 5690'

Production Casing :
4 1/2" 10.5#, K-55 @ 6993'
Cement: 250 sx
TD: 9/19/1984

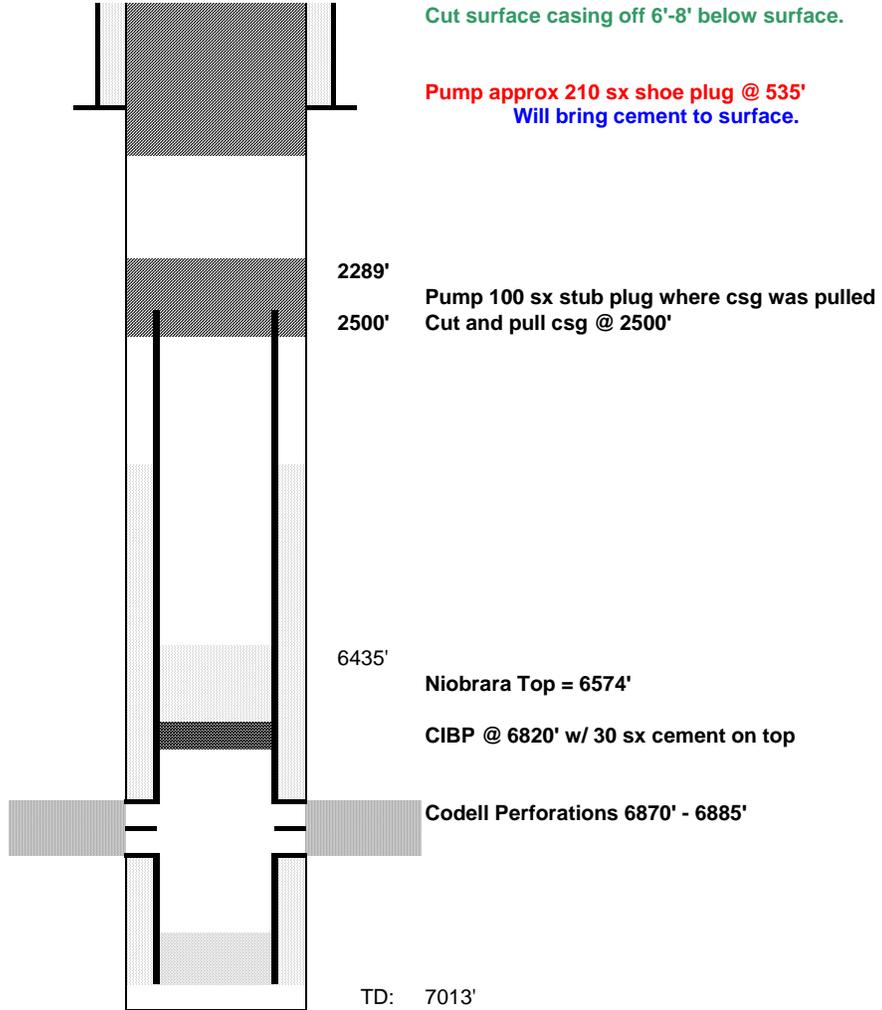

Cut surface casing off 6'-8' below surface.

Pump approx 210 sx shoe plug @ 535'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

Niobrara Top = 6574'

CIBP @ 6820' w/ 30 sx cement on top

Codell Perforations 6870' - 6885'

TD: 7013'