

NOBLE ENERGY INC.

Stromberger 39-12
SESE 12-4N-66W
566 FSL & 548 FEL
WELD COUNTY, CO
Wattenberg

CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
8/31/2016

API: 05-123-26473
COGCC #


GL Elev: 4,705
KB Elev: 4,717

Spud Date: 10/28/2007

Surface Casing :
8-5/8", J-55, 24# @ 547'
Cement: 270 sx
TOC: Surface

TOC @ 3,626"

Production Casing :
4-1/2", I-80, 11.60# @ 7,439'
Cement: 535 sx
TD: 7450

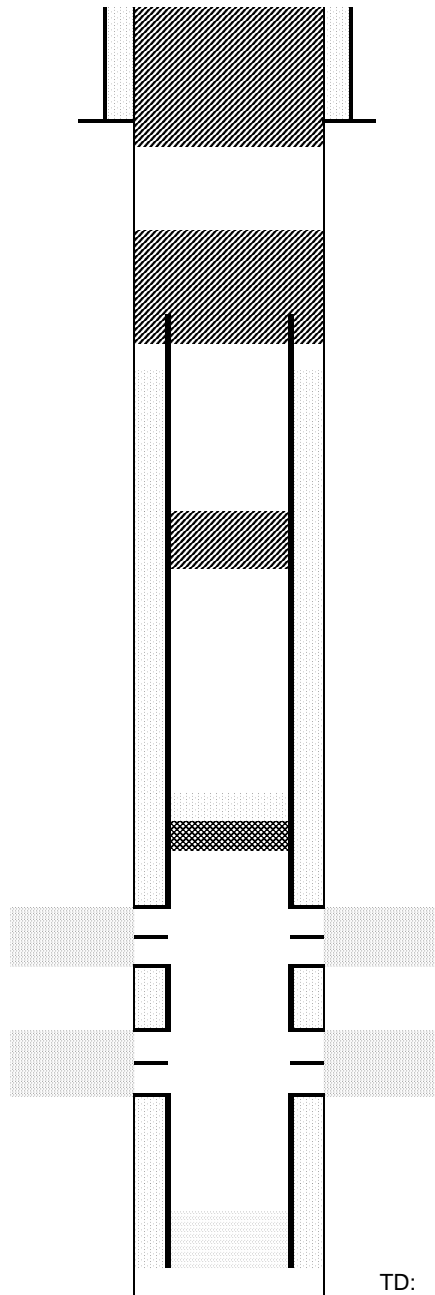

Cut surface casing off 6'-8' below surface.

Pump approx 230 sx shoe plug @ 650
Will bring cement to surface.

Cut and pull csg @ 2,500'
- Pump 100 sx stub plug where csg was pulled

Balance plug across Sussex @ 3,954' to 4,254'
- 25 sx cement

CIBP @ 6,913' w/ 2 sx cement on top

Niobrara Perforations: 6,963' - 7,155'

Codell Perforations: 7,266' - 7,281'

TD: 7450.1