

NOBLE ENERGY INC.
 ALM USX E13-11
 NWSW 11-6N-65W
 1828 FSL & 508 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 8/31/2016

API: 05-123-23305
 COGCC #

GL Elev: 4775'
 KB Elev: 4788'


Spud Date: 12/18/2005

Surface Casing :
 8 5/8" 24.0#, Grade ? @ 476'
 Cement: 340 sx
 TOC: Surface

TOC @ 6339' & 50' 2-Stage

Nio top @ 6885'

Production Casing :
 4 1/2" 11.60#, N-80 @ 7295'
 Cement: 410 sx
 TD: 12/22/2005

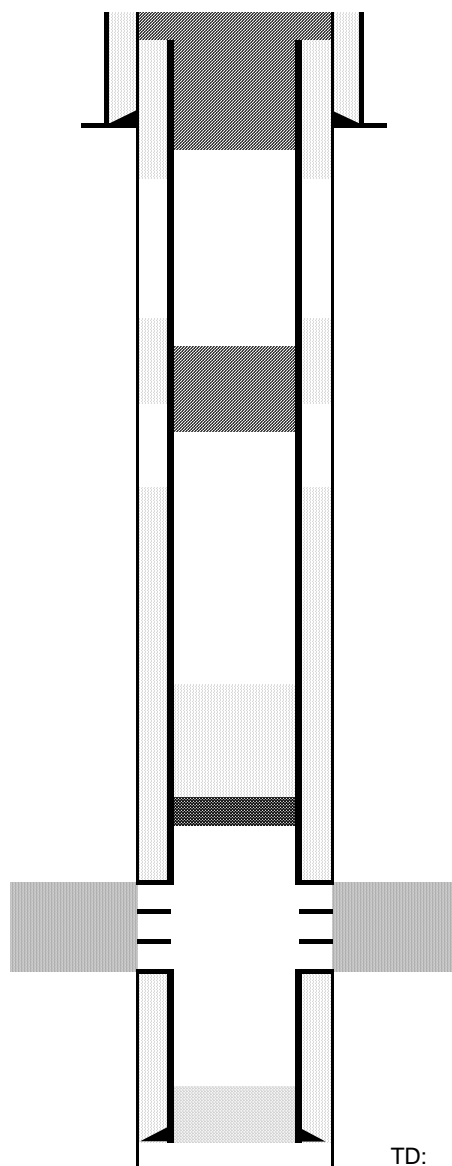

Cut surface casing off 6'-8' below surface.

Pump approx 44 sx shoe plug @ 576'
 Will bring cement to surface.

Deepest waterwell w/in 1 mile is 400'

12/4/14:
 Remedial csg cement work 50' - 575'

12/25/2005:
 Sporadic cement @ ~ 2400' - 2670'
 Pump 50 sx csg plug @ 2500'

CIBP @ 7110' w/ 26 sx cement on top

Codell Perforations 7160' - 7174'

TD: 7321'