

NOBLE ENERGY INC.
ALM USX E11-11
NWSW 11-6N-65W
1890 FSL & 1915 FWL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
8/31/2016

API: 05-123-24483
COGCC #

GL Elev: 4792'
KB Elev: 4802'


Spud Date: 12/18/2005

Surface Casing :
8 5/8" 24.0#, grade? @ 537'
Cement: 300 sx
TOC: Surface

TOC @ 6339' & 2308' 2-Stage

Nio top @ 6885'

Production Casing :
4 1/2" 11.60#, M-80 @ 7304'
Cement: 990 sx
TD: 3/6/2007

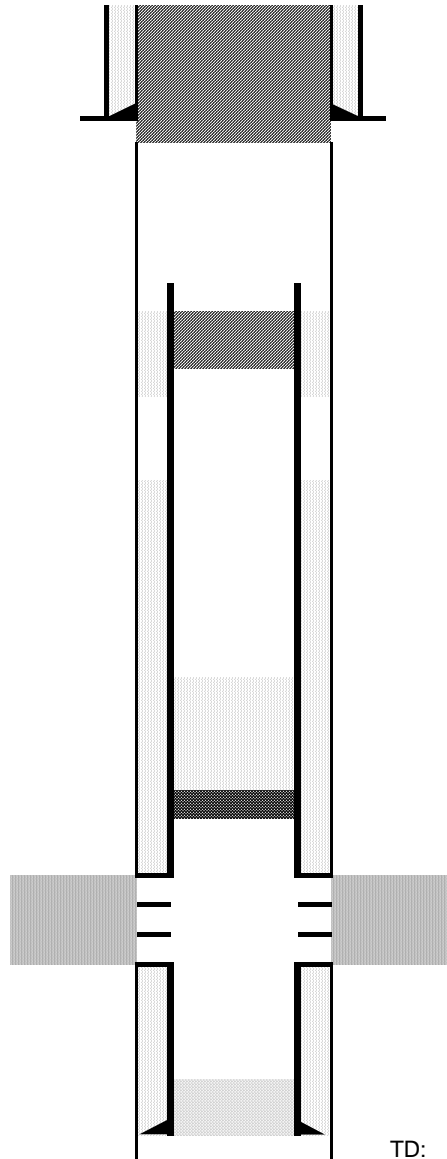

Cut surface casing off 6'-8' below surface.

Pump approx 242 sx shoe plug @ 637'
Will bring cement to surface.

Deepest waterwell w/in 1 mile is 400'

Cut and pull csg @ 2200'
Pump 50 sx csg plug @ approx. +/-2300'

Prod. csg cmt: 3/6/07
From 2308' - 5150'
Sporadic cement @ ~ 5150' - 4750'

CIBP @ 7126' w/ 26 sx cement on top

Codell Perforations 7176' - 7190'

TD: 7318'