

NOBLE ENERGY INC.
 TENNYSON 34-04
 NWNW 34-6N-66W
 573 FNL & 664 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 9/24/2016

API: 05-123-17130
 COGCC #


GL Elev: 4696'
 KB Elev: 4707'

Spud Date: 6/26/1993

Surface Casing :
 8 5/8" 24.0#, grade? @495'
 Cement: 390 sx
 TOC: Surface

TOC @ 6331'

Production Casing :
 2 3/8" 4.70#, WC50 @ 7322'
 Cement: 210 sx
 TD: 7/1/1993

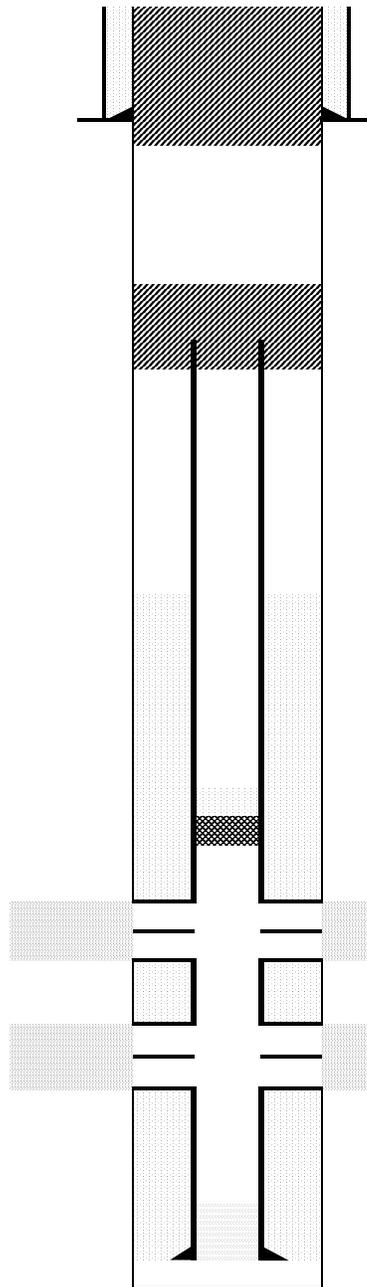

Cut surface casing off 6'-8' below surface.

Pump approx 296 sx shoe plug @ 750'
 Will bring cement to surface
 Deepest waterwell with/in 1 mile is 600'

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6854' w/ 2 sx cement on top

Niobrara Perforations 6904' - 7106'

Codell Perforations 7195' - 7205'

TD: 7325'