

NOBLE ENERGY INC.
 Spike State D16-05
 SWNW 16-3N-64W
 1989 FNL & 659 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 9/26/2016

API: 05-123-15908

KB Elev: 4767'
 GL Elev: 4754'


Spud Date: 7/10/1992

Surface Casing :
 8 5/8", 24#, J-55 @ 352'
 Cement: 250 sx
 TOC: Surface

TOC @ 3910'

TOC @ 6225'

Production Casing :
 3 1/2", 9.5# @ 7035'
 Cement: 470 sx
 Run Date: 7/13/1992

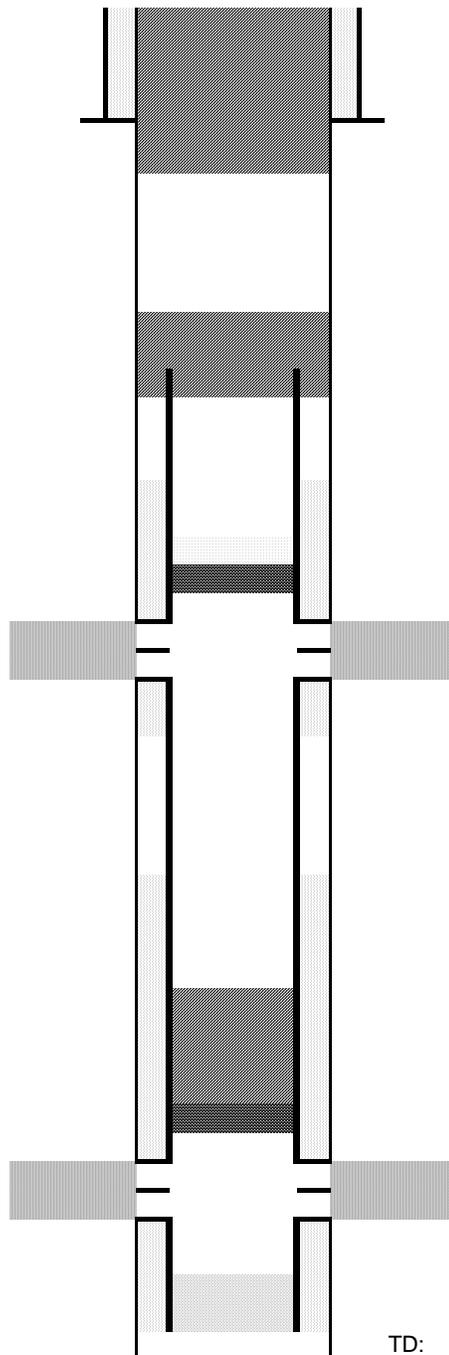

Cut surface casing off 6'-8' below surface.

Pump approx 255 sx shoe plug @ 639'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 4297' w/ 2 sx cement on top

Sussex Perforations: 4347' - 4368'

Pump 15 sx balance plug from 6922' - 6600'
 CIBP @ 6922' w/ 2 sx cement on top

Codell Perforations: 6972' - 6982'

TD: 7105'