

NOBLE ENERGY INC.
Spike State GWS C24-06
SENW 24-4N-64W
1951 FNL & 1943 FWL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
9/27/2016

API: 05-123-15791


KB Elev: 4690'
GL Elev: 4651'

Spud Date: 7/7/1992

Surface Casing :
8 5/8", 24# @ 357'
Cement: 300 sx
TOC: Surface

TOC @ 5826'

Production Casing :
2 7/8", 6.5#, J-55 @ 6936'
Cement: 270 sx
Run Date: 7/12/1992

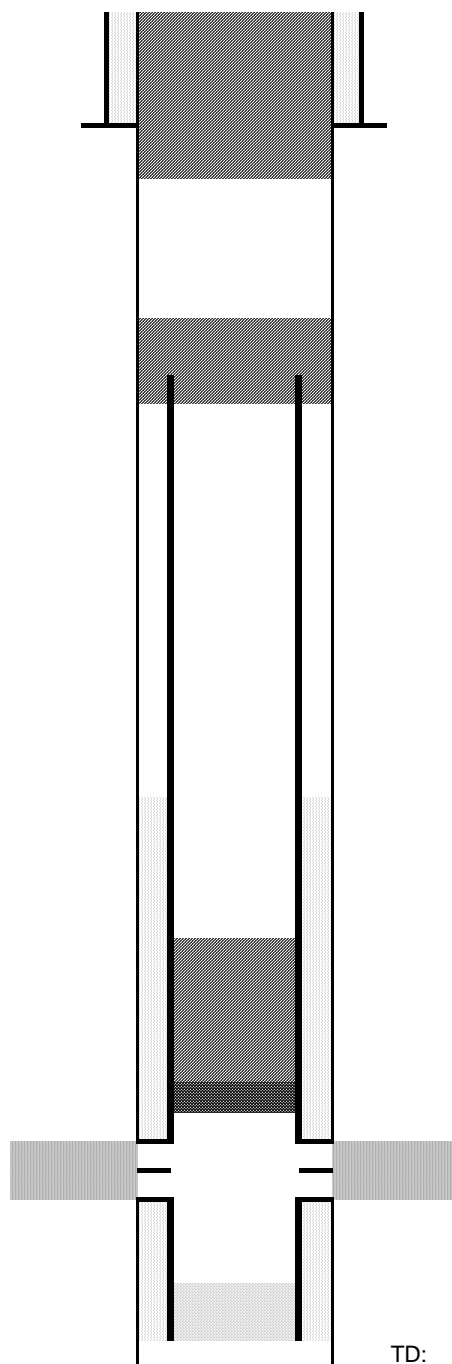

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 472'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

Pump 10 sx balance plug from 6710' - 6374' for Niobrara co
CIBP @ 6710'

Codell Perforations: 6760' - 6770'

TD: 6936'

verage