

NOBLE ENERGY INC.
 Monfort Gilcrest K08-15
 SWSE 8-4N-66W
 660 FSL & 2080 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 9/30/2016

API: 05-123-18958
 COGCC #

GL Elev: 4700'
 KB Elev: 4710'

Spud Date: 2/23/1996

Surface Casing :
 8-5/8" 24# @ 572'
 Cement: 350 sx
 TOC: Surface


| | | |
|----|-----|-----|
| WW | 559 | 709 |
| FH | 329 | 479 |
| SC | 572 | 672 |

No Sussex completions within 1 mile

TOC @ 3765'

Nio Top 6880'

Production Casing :
 3-1/2" 9.3# @ 7387'
 Cement: 905 sx
 TD Date: 8/26/1996

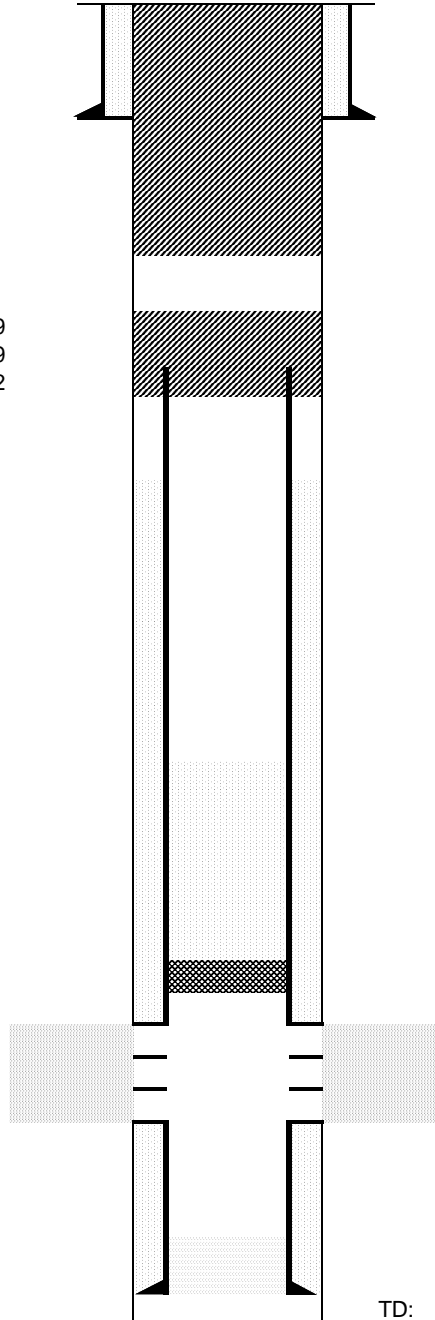

Cut surface casing off 6'-8' below surface.

Pump approx 340 sx shoe plug @ 710'
 Will bring cement to surface.

Cut and pull csg @ 2500'
 Pump 170 sx stub plug where csg pulled
 Cmt Coverage: 2142'-2500'

Set CIBP at 7169'
 Pump 20 sx cement atop it
 to bring cmt above Niobrara
 New TOC: 6698'

Codell Perforations 7,219'-7,234'

TD: 7406'