

**NOBLE ENERGY INC.**  
 Fritzler 25-22  
 SWNE 22-4N-66W  
 2,356' FNL & 2,405' FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 10/5/2016

API: 05-123-25842  
 COGCC #


GL Elev: 4736'  
 KB Elev: 4752'

**Spud Date:** 12/3/2016

**Surface Casing :**  
 8-5/8", 24#, J-55 @ 775'  
 Cement: 296 sx  
 TOC: Surface

**TOC @ 2170'**

**Production Casing :**  
 4-1/2", 11.60#, I-80 @ 7,488'  
 Cement: 850 sx  
 TD: 12/9/2008

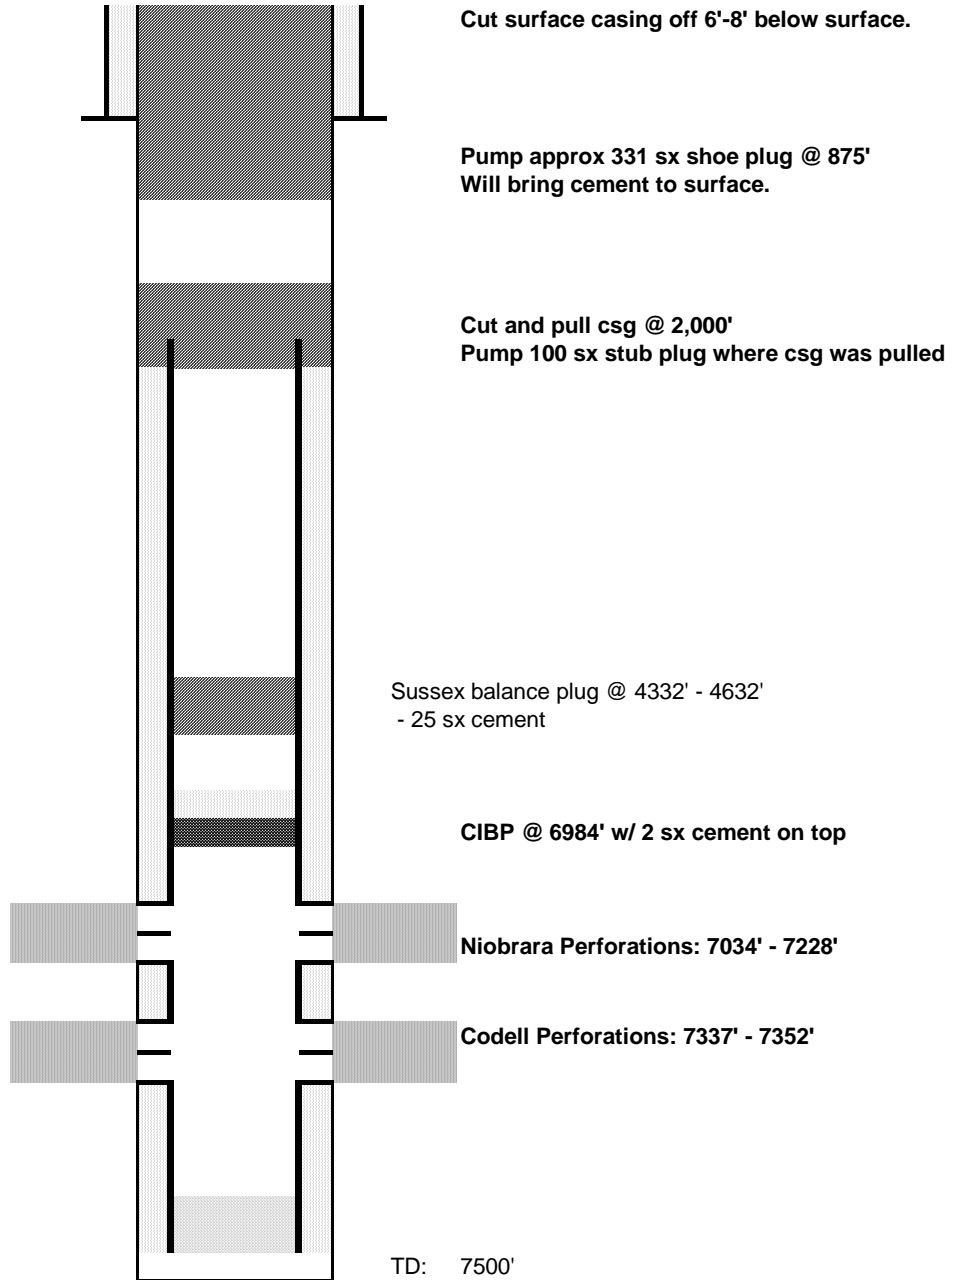

Cut surface casing off 6'-8' below surface.

Pump approx 331 sx shoe plug @ 875'  
 Will bring cement to surface.

Cut and pull csg @ 2,000'  
 Pump 100 sx stub plug where csg was pulled

Sussex balance plug @ 4332' - 4632'  
 - 25 sx cement

CIBP @ 6984' w/ 2 sx cement on top

Niobrara Perforations: 7034' - 7228'

Codell Perforations: 7337' - 7352'

TD: 7500'