

**NOBLE ENERGY INC.**  
 BIERIG 01-26  
 NENE 26-5N-66W  
 770 FNL & 1430 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 10/5/2016

API: 05-123-12735  
 COGCC #


GL Elev: 4779'  
 KB Elev: 4790'

Spud Date: 1/7/1986

**Surface Casing :**  
 8 5/8" 24.0#, J-55 @ 345.5'  
 Cement: 350 sx  
 TOC: Surface

TOC @ 6054'

**Production Casing :**  
 4 1/2" 11.60#, M-75 @ 7412'  
 Cement: 300 sx  
 TD: 1/15/1986

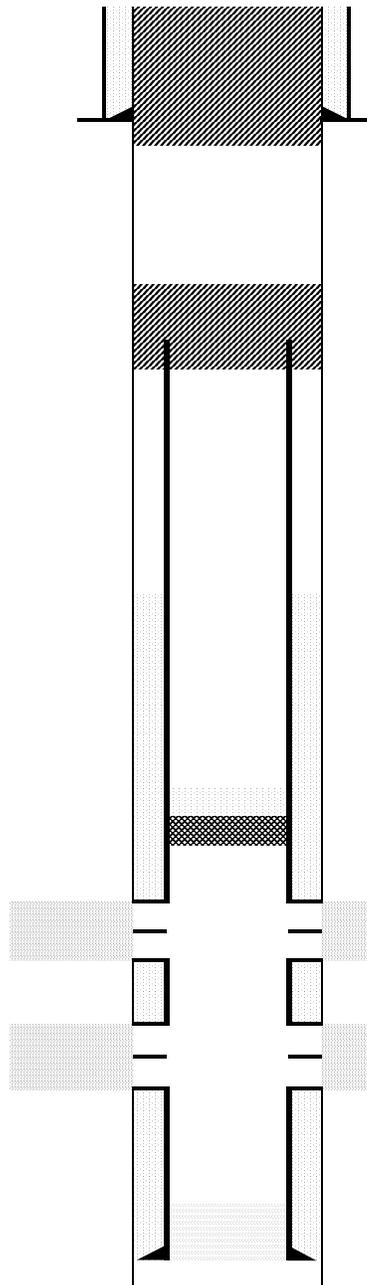

Cut surface casing off 6'-8' below surface.

Pump approx 221 sx shoe plug @ 555'  
 Will bring cement to surface  
 Deepest waterwell with/in 1 mile is 405'

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 6923' w/ 2 sx cement on top

Niobrara Perforations 6973' - 7276'

Codell Perforations 7282' - 7289'

TD: 7415'