

NOBLE ENERGY INC.
SHAFTO J27-09
NESE 27-5N-66W
1983 FSL & 660 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
10/10/2016

API: 05-123-15599
 COGCC #


GL Elev: 4804'
 KB Elev: 4815'

Spud Date: 4/21/1992

Surface Casing :
 8 5/8" 24.0#, J-55 @ 325'
 Cement: 200 sx
 TOC: Surface

TOC @ 6430'
Nio top @ 6880'

Production Casing :
 2 7/8" 7.90#, N-80 @ 7406'
 Cement: 270 sx
 TD: 4/26/1992

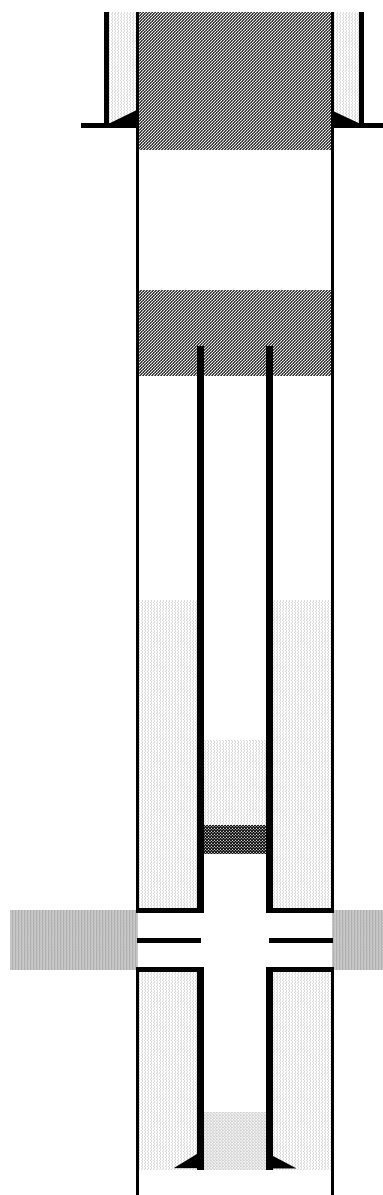

Cut surface casing off 6'-8' below surface.

Pump approx 228 sx shoe plug @ 564'
Will bring cement to surface.

Deepest waterwell with/in 1 mile is 220'
 Foxhills depth is 414'

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 7198' w/ 13 sx cement on top

Codell Perforations 7248' - 7266'

TD: 7424'