



09:12:2016 14:12



09.12.2016 14:12





est requires, tel q

2	2 1/2	15
10.6	12.5	15

ASTM
CAN/UL

R means resistance to heat flow. The higher the R-Value the greater the resistance to heat flow. Before installing GreenGuard®, obtain installation instructions from the manufacturer.

Compliance: See ICC-ES ESR-2912 and VAR-1036, CA BHF TB 113, MN Dept. of Energy - Chapter 7840, Underwriters LLC - See Classification Report ULC-S108.

Go to www.green-guard.com for the most current compliance information.

WARNING: This product is combustible. A protective barrier or a thermal break is required. See the GreenGuard® product literature for details.

AVERTISSEMENT: Ce produit est combustible. Une barrière protectrice ou une rupture thermique est requise. Voir la littérature du produit GreenGuard® pour les détails.

Thickness, inches
Épaisseur, po

R-Value @ 75° F
Valeur R A 75° F

EXTRUDED POLYSTYRENE

09.12.2016 14:12



EXTRUDED WATER

09.12.2016 14:13



09.12.2016 14:13



09.12.2016 14:14



09.12.2016 14:14




09.12.2016 14:14



09.12.2016 14:15



09.12.2016 14:15

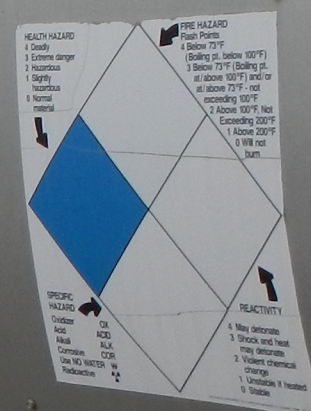

09.12.2016 14:15



09.12.2016 14:15