

NOBLE ENERGY INC.
WILHITE 30-31
NESW 30-7N-64W
2170 FSL & 1807 FWL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
10/24/2016

API: 05-123-24806
COGCC #

GL Elev: 4861'
KB Elev: 4873'

Spud Date: 10/13/2007

Surface Casing :

8 5/8" 24# @ 687'

Cement: 350

TOC: Surface

TOC @ 6328'


Nio Top 6831'

Production Casing :

4 1/2" 11.6# @ 7279'

Cement: 135

TD: 10/17/2007

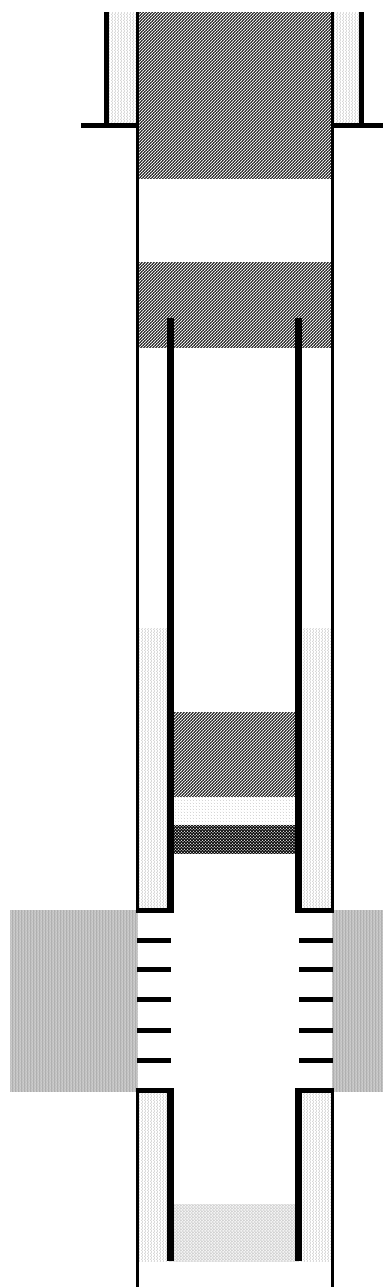

Cut surface casing off 6'-8' below surface.

Pump approx 290 sx shoe plug @ 755'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
(TOC @ ~ 2236')
Cut and pull csg @ 2500'

TOC @ ~6700'

CIBP @ 7101' w/ 32 sx cement on top

Codell Perforations 7151' - 7164'

TD: 7317'