

**NOBLE ENERGY INC.**  
 EIFERT 11-42  
 NWSE 11-6N-65W  
 1919 FSL & 1808 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 10/5/2016

API: 05-123-21645  
 COGCC #


GL Elev: 4783'  
 KB Elev: 4793'

Spud Date: 9/5/2003

**Surface Casing :**  
 8 5/8" 24.0#, J-55 @ 450'  
 Cement: 250 sx  
 TOC: Surface

TOC @ 6280'  
 Nio top @ 6828'

**Production Casing :**  
 4 1/2" 11.60#, M-80 @ 7283'  
 Cement: 165 sx  
 TD: 9/10/2003

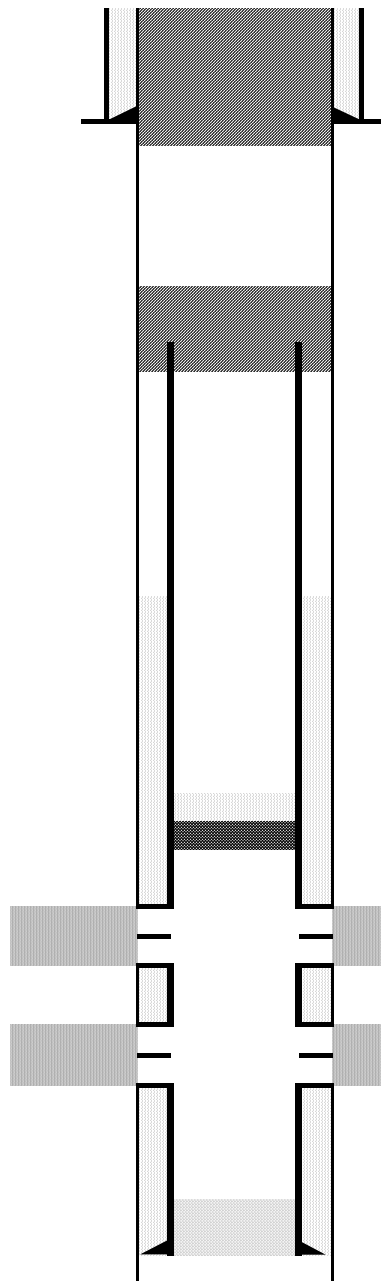

Cut surface casing off 6'-8' below surface.

Pump approx 206 sx shoe plug @ 550'  
 Will bring cement to surface.

Deepest waterwell with/in 1 mile is 400'

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 6905' w/ 2 sx cement on top

Niobrara Perforations 6955' - 6984'

Codell Perforations 7145' - 7160'

TD: 7297'