

NOBLE ENERGY INC.
 FLATIRONS I36-04
 NWNW 36-6N-66W
 592 FNL & 636 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 10/7/2016

API: 05-123-21930
 COGCC #


GL Elev: 4669'
 KB Elev: 4679'

Spud Date: 3/8/2004

Surface Casing :
 8 5/8" 24.0#, J-55 @ 537'
 Cement: 225 sx
 TOC: Surface

TOC @ 6440'

Production Casing :
 4 1/2" 11.60#, M-80 @ 7264'
 Cement: 130 sx
 TD: 3/12/2004

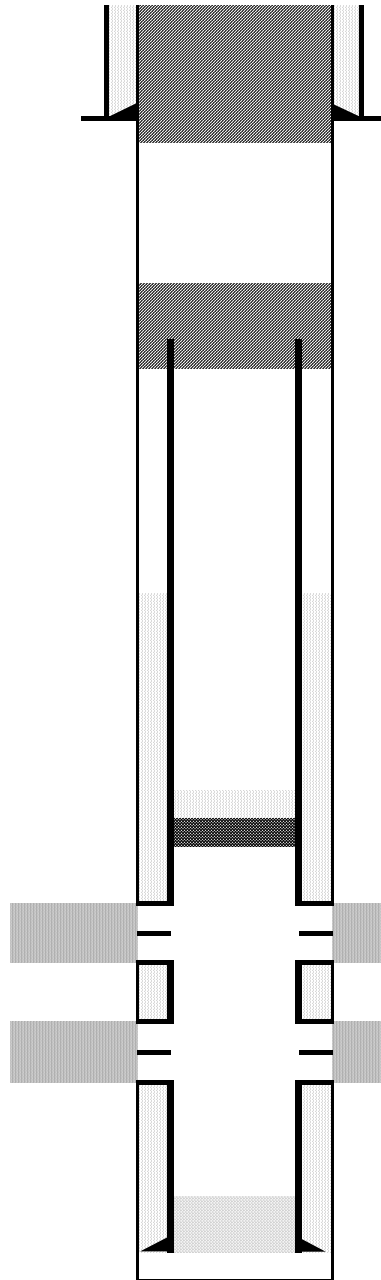

Cut surface casing off 6'-8' below surface.

Pump approx 236 sx shoe plug @ 637'
 Will bring cement to surface.

Deepest waterwell with/in 1 mile is 80'

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6764' w/ 2 sx cement on top

Niobrara Perforations 6814' - 6954'

Codell Perforations 7118' - 7132'

TD: 7290'