

NOBLE ENERGY INC.
 Pepler PC AA17-25
 SESW 17-6N-63W
 1300' FSL & 1380' FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 11/23/2016

API: 05-123-32108
 COGCC #


GL Elev: 4667'
 KB Elev: 4681'

Spud Date: 1/21/2011

Surface Casing :
 8 5/8" 24# J-55 @ 575'
 Cement: 329 sks
 TOC: Surface

TOC @ 1720'

Production Casing :
 4 1/2" 11.6# M-80 @ 6951'
 Cement: 550 sks
 TD: 1/25/2011

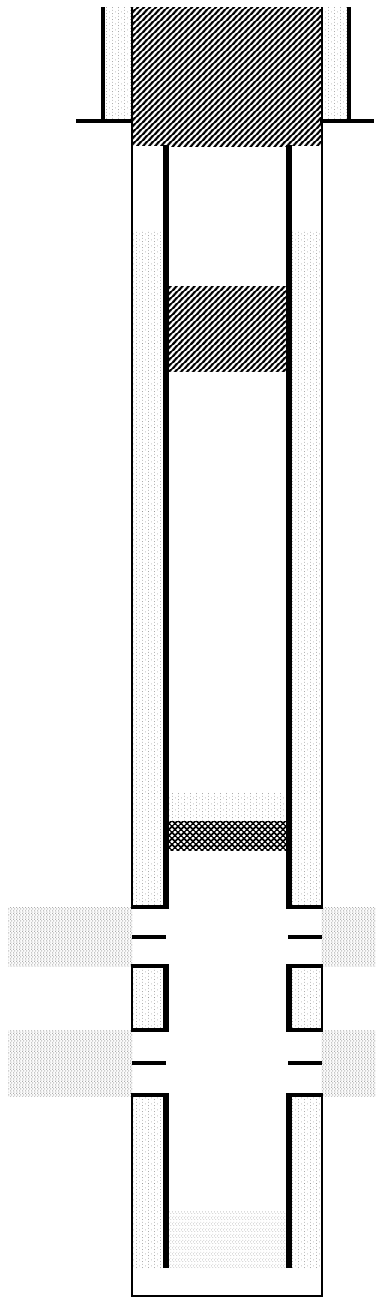

Cut surface casing off 6'-8' below surface.

Pump approx 210 sx shoe plug @ 675'
 Will bring cement to surface

Pump 20 sks courtesy plug @ 2500'
 Top of plug ~ 2200'

CIBP @ 6420' w/ 2 sx cement on top

Niobrara Perforations 6470' - 6482'

Codell Perforations 6762' - 6774'

TD: 6961'