

NOBLE ENERGY INC.
 Bashor State AA16-25
 NESW 16-6N-63W
 &
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 12/7/2016

API: 05-123-26117
 COGCC #


GL Elev: 4679
 KB Elev: 4693

Spud Date: 8/24/2007

Surface Casing :
 8 5/8" 24# J-55 @ 526'
 Cement: 255
 TOC: Surface

TOC @ 2000'

Production Casing :
 4 1/2" 11.60 M-80 @ 6899'
 Cement: 820
 TD: 8/27/2007

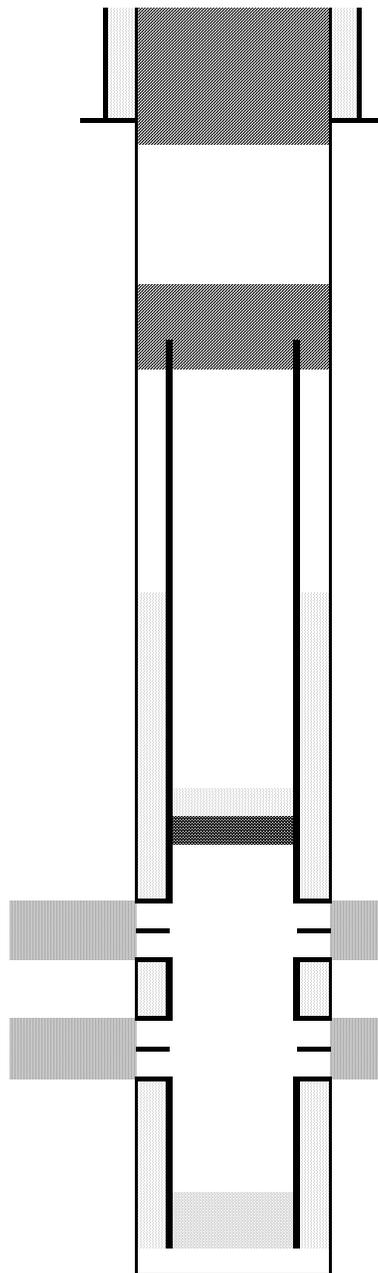

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 626'
 Will bring cement to surface.

WW	450	600
FH	372	522
SC	526	626

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 1900', stub starts @ 1850'

CIBP @ 6419' w/ 2 sx cement on top

Niobrara Perforations 6469'-6586'

Codell Perforations 6746'-6756'

TD: 6906