

NOBLE ENERGY INC.
 Stroh 35-04
 NWNW 35-5N-64W
 661 FNL & 671 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 11/30/2016

API: 05-123-17028
 COGCC #

GL Elev: 4646'
 KB Elev: 4657'


Spud Date: 6/23/1993

Surface Casing :
 7" 20# @ 536'
 Cement: 200 sx
 TOC: Surface

FH Depth= 197'
 Deepest Water Well = 152'

TOC @ 6048'

Production Casing :
 3 1/2" 7.7#, M-75 @ 6925
 Cement: 90 sx
 TD: 6/29/1993

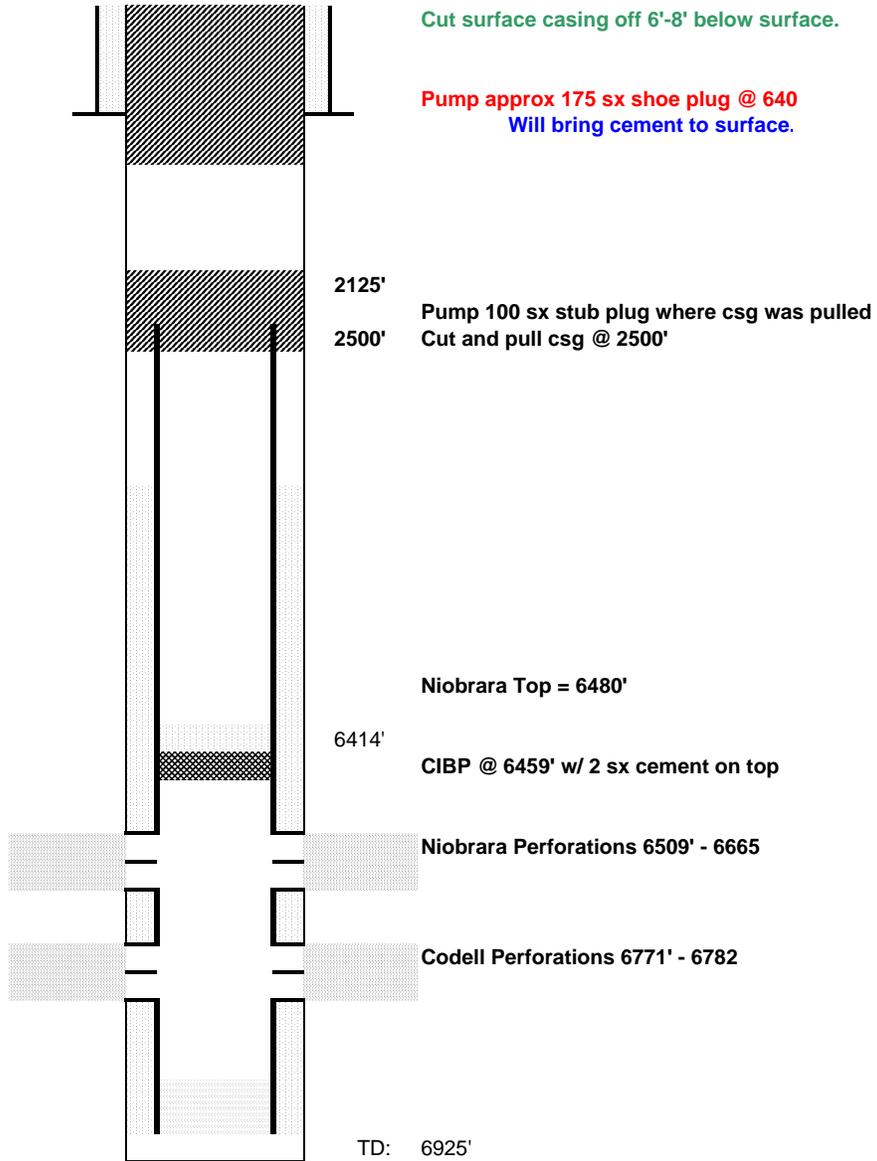

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 640
 Will bring cement to surface.

2125'
 2500' Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Niobrara Top = 6480'

6414'
 CIBP @ 6459' w/ 2 sx cement on top

Niobrara Perforations 6509' - 6665

Codell Perforations 6771' - 6782

TD: 6925'