

NOBLE ENERGY INC.
 Trump A13-09
 NESE 13-6N-64W
 1980 FSL & 660 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 1/5/2017

API: 05-123-24394
 COGCC #


GL Elev: 4,650
 KB Elev: 4,662

Spud Date: 3/15/2007

Surface Casing :
 8-5/8", J-55, 24# @ 494'
 Cement: 279 sx
 TOC: Surface

TOC @ 1692'

Production Casing :
 4-1/2", M-80, 11.60# @ 6,952'
 Cement: 1010 sx
 TD: 6961

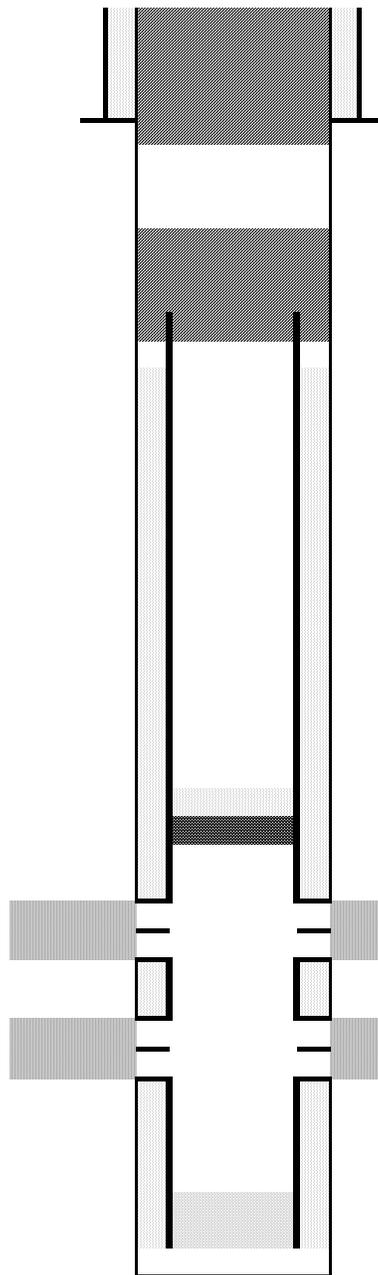

Cut surface casing off 6'-8' below surface.

Pump approx 220 sx shoe plug @ 594'
 Will bring cement to surface.

Cut and pull csg @ 1682' (top of plug 1482')
 - Pump 100 sx stub plug where csg was pulled

CIBP @ 6,452' w/ 2 sx cement on top

Niobrara Perforations: 6,502' - 6632'

Codell Perforations: 6,785' - 6,797'

TD: 6961