

BONANZA CREEK ENERGY INC.

**WELD COUNTY, COLORADO (NAD 83)
NW NW SEC. 36 T5N R63W 6th P.M.
STATE NORTH PLATTE F21-J24-36HNC**

ORIGINAL WELLBORE

11 January, 2017

Plan: PROPOSAL #2





Project: WELD COUNTY, COLORADO (NAD 83)
Site: NW NW SEC. 36 T5N R63W 6th P.M.
Well: STATE NORTH PLATTE F21-J24-36HNC
Wellbore: ORIGINAL WELLBORE
Design: PROPOSAL #2

ANNOTATIONS									
TVD	MD	Inc	Azi	+N/-S	+E/-W	Vsect	Dep	Annotation	
0.0	0.0	0.00	0.00	0.0	0.0	0.0	0.0	SHL: 337ft FNL & 439ft FWL of Sec 36	
700.0	700.0	0.00	0.00	0.0	0.0	0.0	0.0	START NUDGE (2°/100ft BUR)	
949.7	950.0	5.00	140.00	-8.4	7.0	9.9	10.9	EOB TO 5° INC	
1600.0	1602.8	5.00	140.00	-51.9	43.6	61.8	67.8	SURFACE CASING	
1699.6	1702.8	5.00	140.00	-58.6	49.2	69.8	76.5	END OF TANGENT	
1979.5	1983.5	5.00	71.62	-64.1	68.7	80.4	98.5	EOT TO 71.61° AZ	
2873.3	2909.8	23.52	71.61	7.5	284.3	70.2	325.7	EOB TO 23.52° INC	
4673.5	4873.1	23.52	71.61	254.8	1027.9	35.1	1109.4	END OF TANGENT	
5816.9	6049.3	0.00	71.61	329.9	1253.8	24.4	1347.4	EOD TO VERTICAL	
5846.9	6079.3	0.00	0.00	329.9	1253.8	24.4	1347.4	KOP (12°/100ft BUR)	
6308.1	6704.3	75.00	180.22	-24.0	1252.4	364.5	1701.3	START OF TANGENT	
6334.0	6804.3	75.00	180.22	-120.6	1252.1	457.3	1797.9	END OF TANGENT	
6350.2	6929.3	90.00	180.22	-244.1	1251.6	576.1	1921.5	HZ LP: 589.1ft FNL & 1692.8ft FWL of Sec 36	
6350.2	11045.6	90.00	180.23	-4360.4	1235.6	4532.1	6037.7	BHL: 470ft FSL & 1729ft FWL of Sec 36	




LOCAL COORDINATES:

SHL: 337ft FNL & 439ft FWL Sec 36

HZ LP *NEW* 589.1ft FNL & 1692.8ft FWL Sec 36

BHL: 470ft FSL & 1729ft FWL Sec 36

WELLBORE TARGET DETAILS (LAT/LONG)					
Name	TVD	+N/-S	+E/-W	Latitude	Longitude
KOP - STATE NP F21-J24-36HNC (P2)	5846.9	329.9	1253.8	40.363166	-104.387876
BHL - STATE NP F21-J24-36HNC (P2)	6350.2	-4360.4	1235.6	40.350292	-104.387942
HZ LP *NEW* - STATE NP F21-J24-36HNC (P2)	6350.2	-186.1	1251.8	40.361750	-104.387883

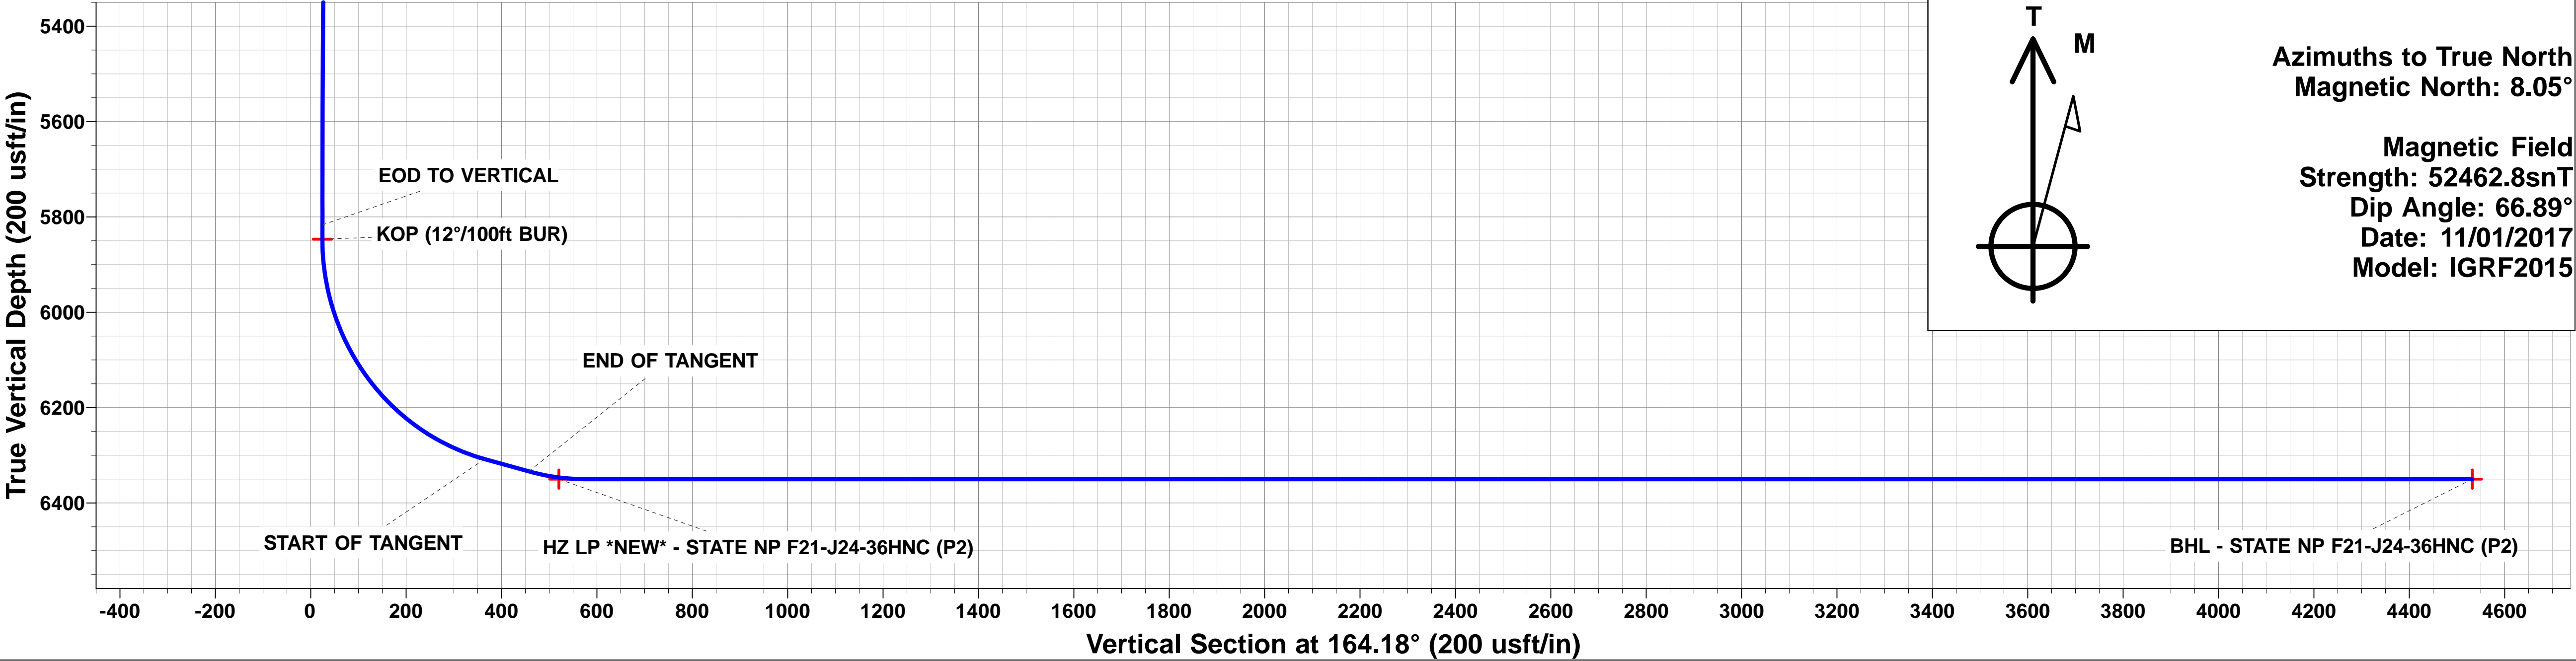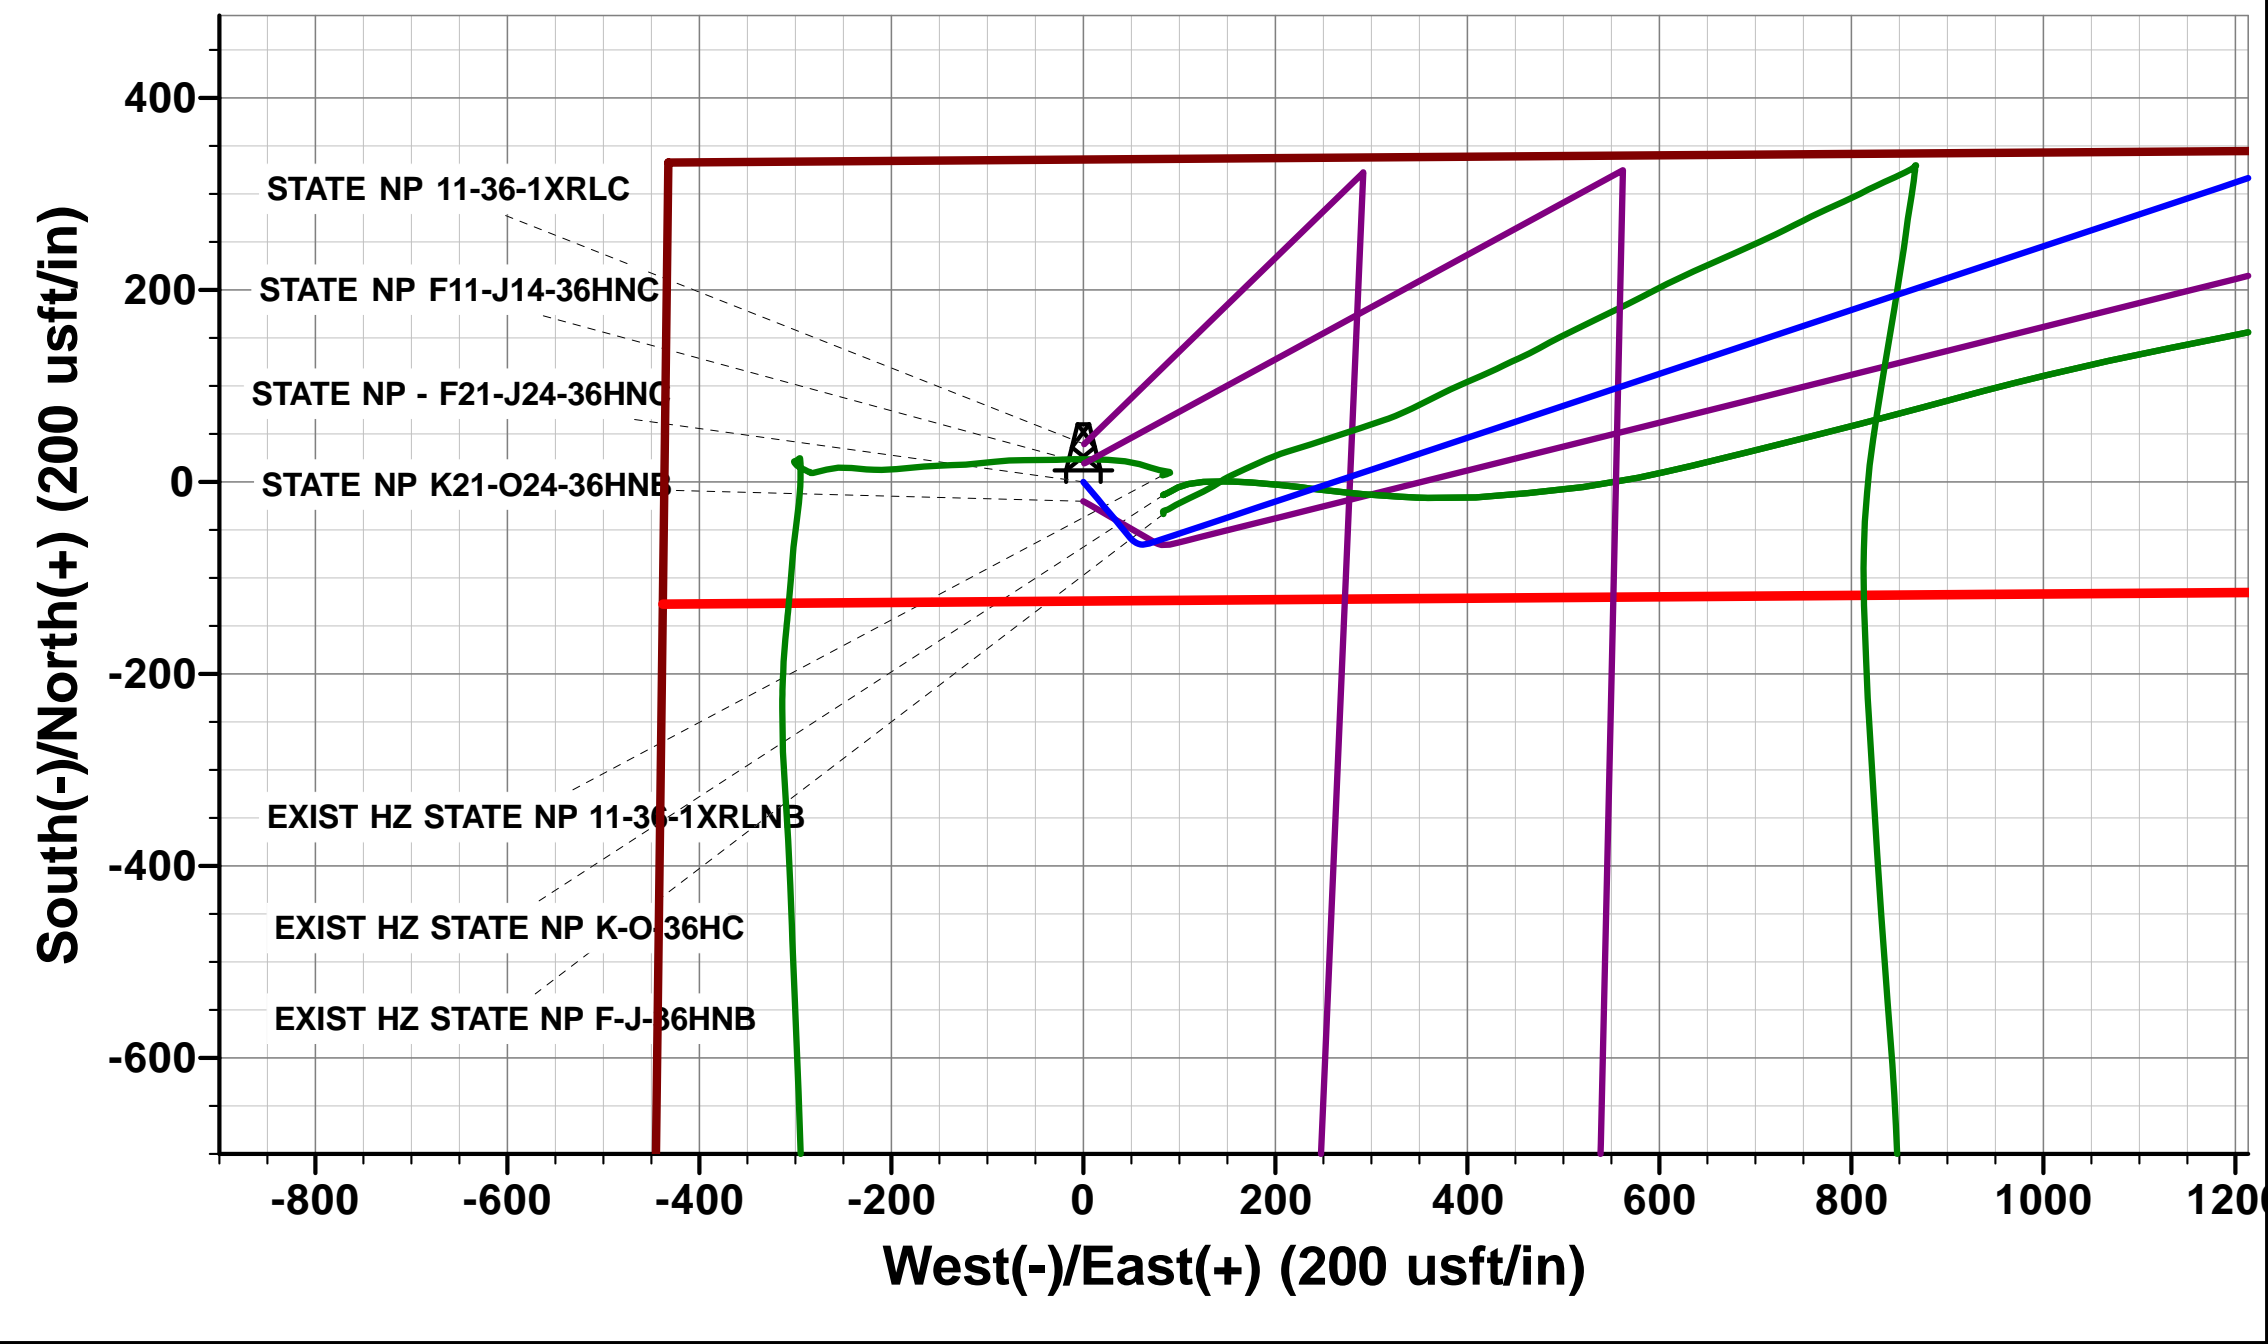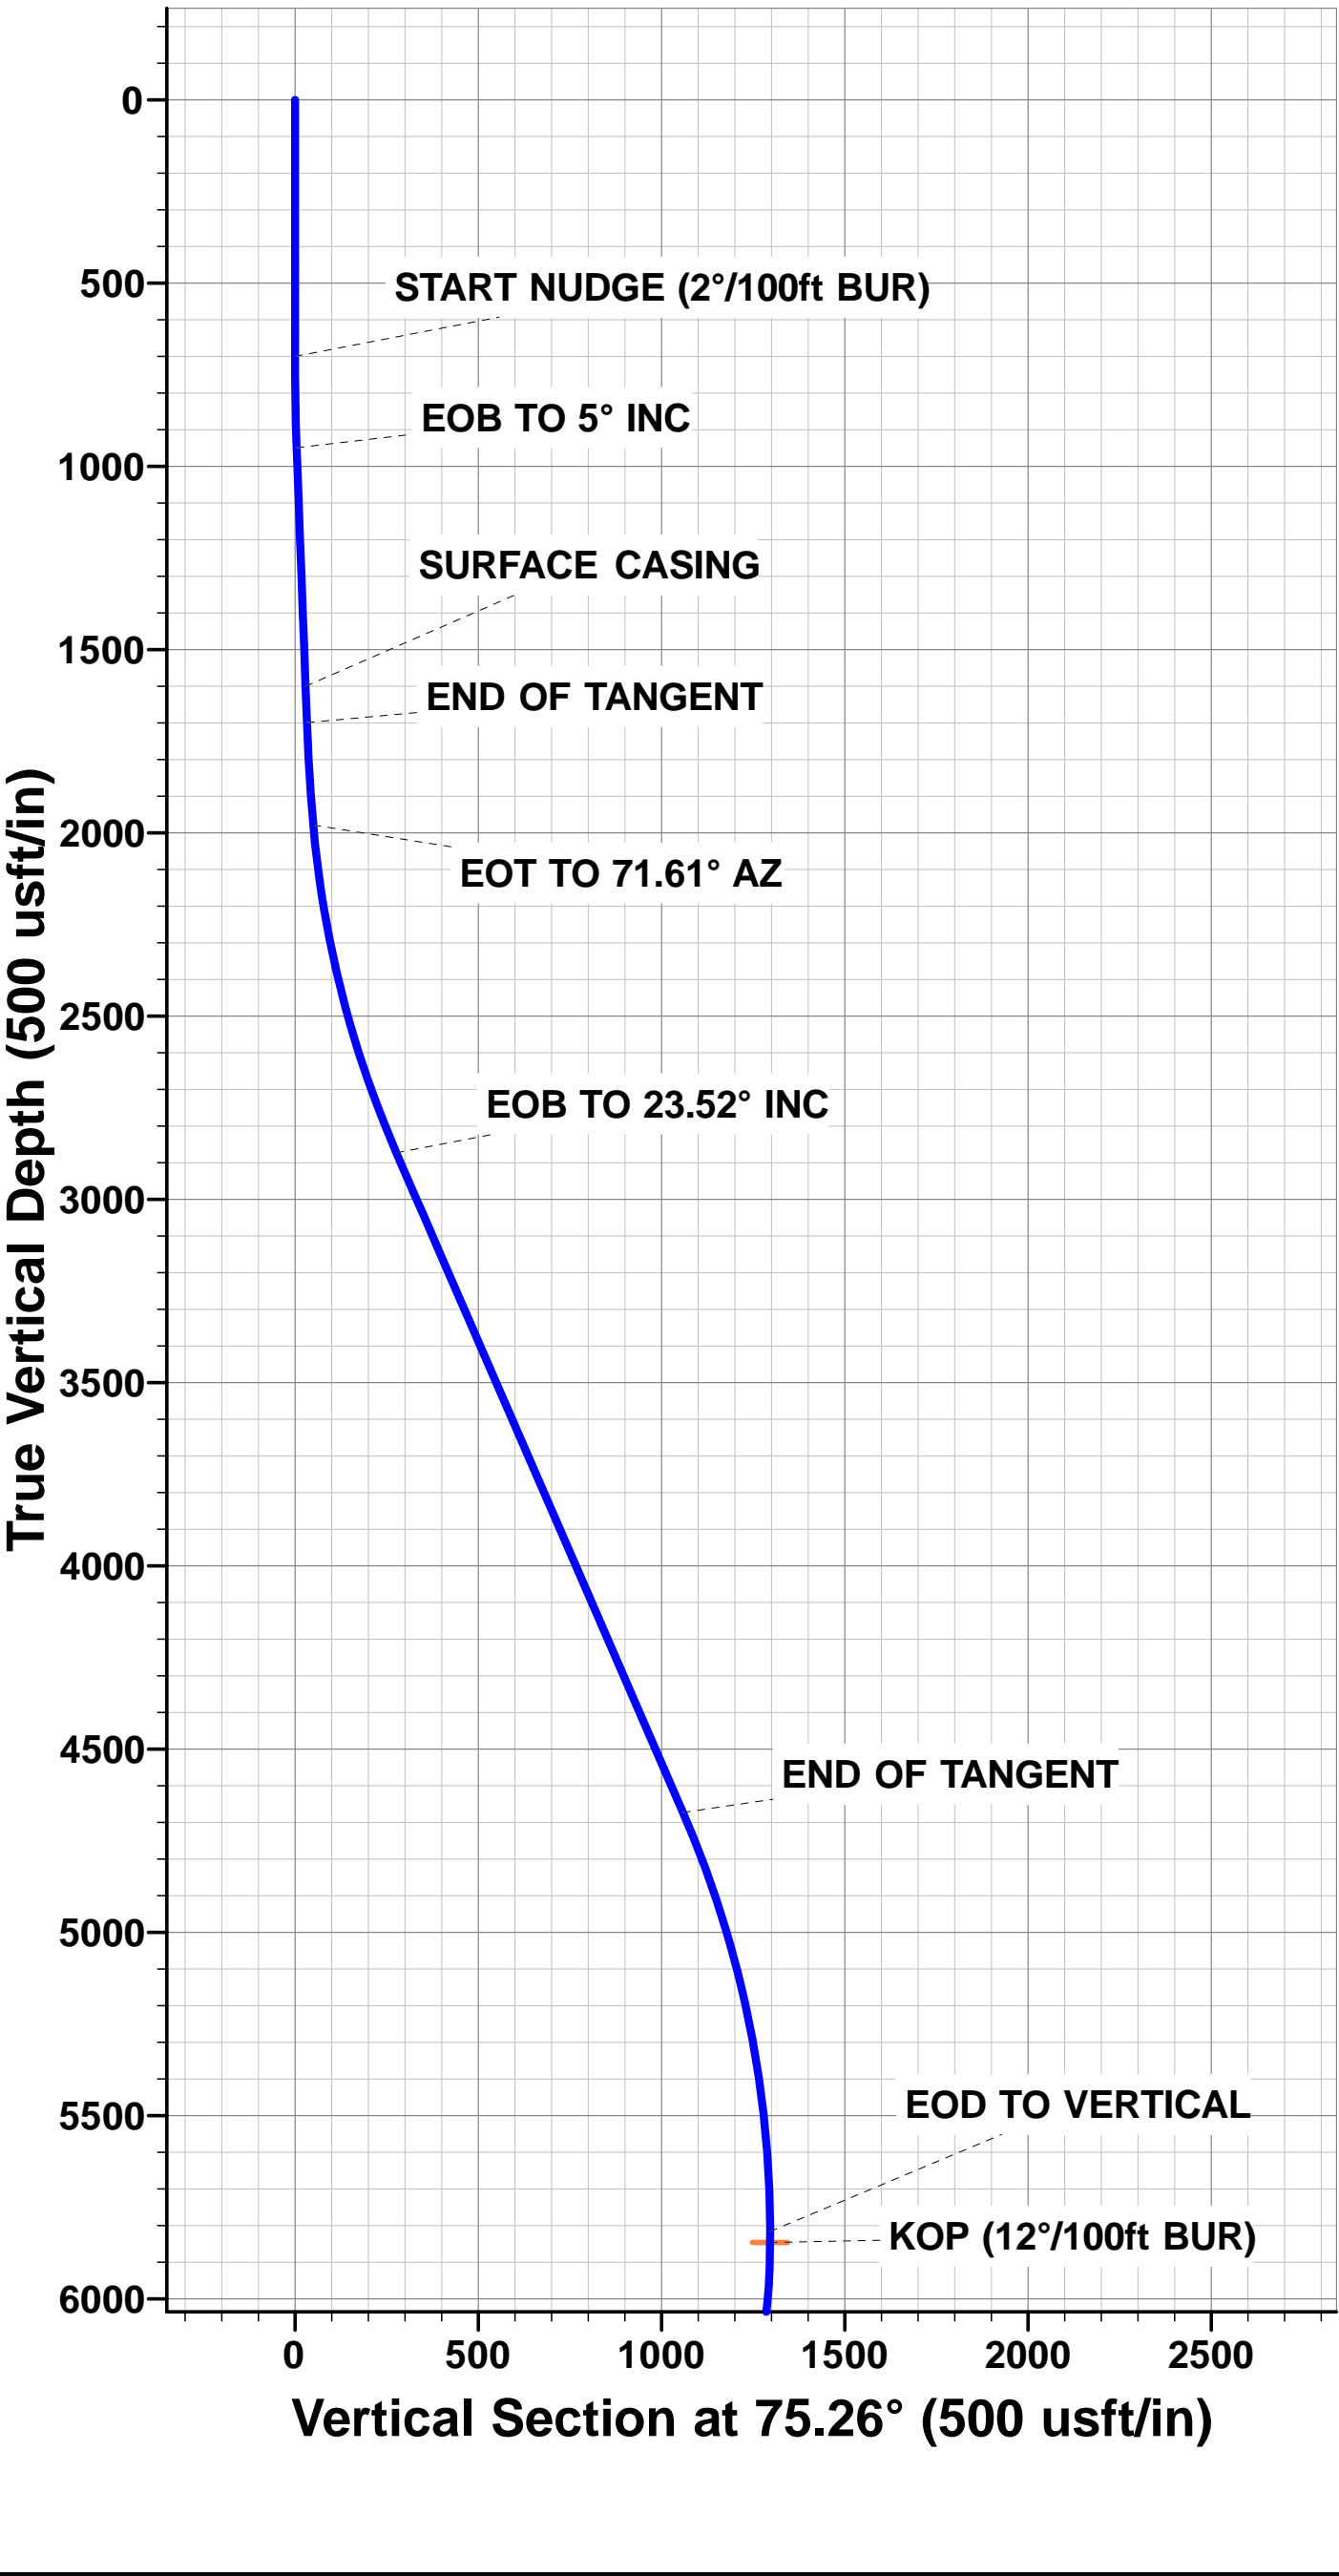

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well STATE NORTH PLATTE F21-J24-36HNC
Company:	BONANZA CREEK ENERGY INC.	TVD Reference:	KB-EST @ 4560.2usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4560.2usft
Site:	NW NW SEC. 36 T5N R63W 6th P.M.	North Reference:	True
Well:	STATE NORTH PLATTE F21-J24-36HNC	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Project	WELD COUNTY, COLORADO (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		Using geodetic scale factor

Site	NW NW SEC. 36 T5N R63W 6th P.M.		
Site Position:		Northing:	1,376,747.52 usft
From:	Lat/Long	Easting:	3,308,732.52 usft
Position Uncertainty:	0.0 usft	Slot Radius:	1.10000ft
		Latitude:	40.362279
		Longitude:	-104.392074
		Grid Convergence:	0.72 °

Well	STATE NORTH PLATTE F21-J24-36HNC		
Well Position	+N/-S	-6.6 usft	Northing:
	+E/-W	-83.9 usft	Easting:
Position Uncertainty	0.0 usft		Wellhead Elevation:
			Latitude:
			Longitude:
			Ground Level:

Wellbore	ORIGINAL WELLBORE				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	11/01/2017	8.05	66.89	52,463

Design	PROPOSAL #2				
Audit Notes:					
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	164.18	

Plan Sections											
MD (usft)	Inc (°)	Azi (°)	Vertical Depth	SS (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usf)	Build Rate (°/100usf)	Turn Rate (°/100usf)	TFO (°)	Target
0.0	0.00	0.00	0.0	-4,560.2	0.0	0.0	0.00	0.00	0.00	0.00	
700.0	0.00	0.00	700.0	-3,860.2	0.0	0.0	0.00	0.00	0.00	0.00	
950.0	5.00	140.00	949.7	-3,610.5	-8.4	7.0	2.00	2.00	0.00	140.00	
1,602.8	5.00	140.00	1,600.0	-2,960.2	-51.9	43.6	0.00	0.00	0.00	0.00	
1,702.8	5.00	140.00	1,699.6	-2,860.6	-58.6	49.2	0.00	0.00	0.00	0.00	
1,983.5	5.00	71.61	1,979.5	-2,580.7	-64.1	68.7	2.00	0.00	-24.36	235.90	
2,909.8	23.52	71.61	2,873.3	-1,686.9	7.6	284.3	2.00	2.00	0.00	0.00	
4,873.1	23.52	71.61	4,673.4	113.2	254.8	1,027.9	0.00	0.00	0.00	0.00	
6,049.3	0.00	0.00	5,816.9	1,256.7	329.9	1,253.8	2.00	-2.00	0.00	180.00	
6,079.3	0.00	0.00	5,846.9	1,286.7	329.9	1,253.8	0.00	0.00	0.00	0.00	KOP - STATE NP F
6,704.3	75.00	180.22	6,308.1	1,747.9	-24.0	1,252.4	12.00	12.00	0.00	180.22	
6,804.3	75.00	180.22	6,334.0	1,773.8	-120.6	1,252.1	0.00	0.00	0.00	0.00	
6,929.3	90.00	180.22	6,350.2	1,790.0	-244.2	1,251.6	12.00	12.00	0.00	0.00	
11,045.6	90.00	180.23	6,350.2	1,790.0	-4,360.4	1,235.6	0.00	0.00	0.00	76.71	BHL - STATE NP F

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well STATE NORTH PLATTE F21-J24-36HNC
Company:	BONANZA CREEK ENERGY INC.	TVD Reference:	KB-EST @ 4560.2usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4560.2usft
Site:	NW NW SEC. 36 T5N R63W 6th P.M.	North Reference:	True
Well:	STATE NORTH PLATTE F21-J24-36HNC	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Planned Survey

MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
SHL: 337ft FNL & 439ft FWL of Sec 36										
0.0	0.00	0.00	0.0	4,560.20	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	4,460.20	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	4,360.20	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	4,260.20	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	4,160.20	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	4,060.20	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	3,960.20	0.0	0.0	0.0	0.00	0.00	0.00
START NUDGE (2°/100ft BUR)										
700.0	0.00	0.00	700.0	3,860.20	0.0	0.0	0.0	0.00	0.00	0.00
800.0	2.00	140.00	800.0	3,760.22	-1.3	1.1	1.6	2.00	2.00	0.00
900.0	4.00	140.00	899.8	3,660.36	-5.3	4.5	6.4	2.00	2.00	0.00
EOB TO 5° INC										
950.0	5.00	140.00	949.7	3,610.52	-8.4	7.0	9.9	2.00	2.00	0.00
1,000.0	5.00	140.00	999.5	3,560.71	-11.7	9.8	13.9	0.00	0.00	0.00
1,100.0	5.00	140.00	1,099.1	3,461.09	-18.4	15.4	21.9	0.00	0.00	0.00
1,200.0	5.00	140.00	1,198.7	3,361.47	-25.0	21.0	29.8	0.00	0.00	0.00
1,300.0	5.00	140.00	1,298.4	3,261.85	-31.7	26.6	37.8	0.00	0.00	0.00
1,400.0	5.00	140.00	1,398.0	3,162.23	-38.4	32.2	45.7	0.00	0.00	0.00
1,500.0	5.00	140.00	1,497.6	3,062.61	-45.1	37.8	53.7	0.00	0.00	0.00
1,600.0	5.00	140.00	1,597.2	2,962.99	-51.7	43.4	61.6	0.00	0.00	0.00
SURFACE CASING										
1,602.8	5.00	140.00	1,600.0	2,960.20	-51.9	43.6	61.8	0.00	0.00	0.00
1,700.0	5.00	140.00	1,696.8	2,863.37	-58.4	49.0	69.6	0.00	0.00	0.00
END OF TANGENT										
1,702.8	5.00	140.00	1,699.6	2,860.58	-58.6	49.2	69.8	0.00	0.00	0.00
1,800.0	4.23	117.60	1,796.5	2,763.69	-63.5	55.1	76.1	2.00	-0.79	-23.04
1,900.0	4.29	90.44	1,896.2	2,663.96	-65.3	62.1	79.7	2.00	0.06	-27.17
EOT TO 71.61° AZ										
1,983.5	5.00	71.62	1,979.5	2,580.73	-64.1	68.7	80.4	2.00	0.85	-22.54
2,000.0	5.33	71.61	1,995.9	2,564.29	-63.7	70.1	80.4	2.00	2.00	-0.05
2,100.0	7.33	71.61	2,095.3	2,464.91	-60.2	80.5	79.9	2.00	2.00	0.00
2,200.0	9.33	71.61	2,194.2	2,365.97	-55.6	94.3	79.2	2.00	2.00	0.00
2,300.0	11.33	71.61	2,292.6	2,267.59	-50.0	111.3	78.4	2.00	2.00	0.00
2,400.0	13.33	71.61	2,390.3	2,169.90	-43.2	131.5	77.5	2.00	2.00	0.00
2,500.0	15.33	71.61	2,487.2	2,073.02	-35.4	155.0	76.3	2.00	2.00	0.00
2,600.0	17.33	71.61	2,583.1	1,977.06	-26.5	181.7	75.1	2.00	2.00	0.00
2,700.0	19.33	71.61	2,678.1	1,882.13	-16.6	211.5	73.7	2.00	2.00	0.00
2,800.0	21.33	71.61	2,771.8	1,788.37	-5.7	244.5	72.1	2.00	2.00	0.00
2,900.0	23.33	71.61	2,864.3	1,695.87	6.3	280.6	70.4	2.00	2.00	0.00
EOB TO 23.52° INC										
2,909.8	23.52	71.61	2,873.3	1,686.88	7.5	284.3	70.2	2.00	2.00	0.00
3,000.0	23.52	71.61	2,956.0	1,604.17	18.9	318.4	68.6	0.00	0.00	0.00
3,100.0	23.52	71.61	3,047.7	1,512.49	31.5	356.3	66.8	0.00	0.00	0.00
3,200.0	23.52	71.61	3,139.4	1,420.80	44.1	394.2	65.0	0.00	0.00	0.00
3,300.0	23.52	71.61	3,231.1	1,329.11	56.7	432.0	63.3	0.00	0.00	0.00
3,400.0	23.52	71.61	3,322.8	1,237.42	69.3	469.9	61.5	0.00	0.00	0.00
3,500.0	23.52	71.61	3,414.5	1,145.73	81.9	507.8	59.7	0.00	0.00	0.00
3,600.0	23.52	71.61	3,506.2	1,054.04	94.5	545.7	57.9	0.00	0.00	0.00
3,700.0	23.52	71.61	3,597.8	962.35	107.1	583.6	56.1	0.00	0.00	0.00
3,800.0	23.52	71.61	3,689.5	870.66	119.7	621.4	54.3	0.00	0.00	0.00
3,900.0	23.52	71.61	3,781.2	778.97	132.2	659.3	52.5	0.00	0.00	0.00

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well STATE NORTH PLATTE F21-J24-36HNC
Company:	BONANZA CREEK ENERGY INC.	TVD Reference:	KB-EST @ 4560.2usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4560.2usft
Site:	NW NW SEC. 36 T5N R63W 6th P.M.	North Reference:	True
Well:	STATE NORTH PLATTE F21-J24-36HNC	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Planned Survey

MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,000.0	23.52	71.61	3,872.9	687.29	144.8	697.2	50.7	0.00	0.00	0.00
4,100.0	23.52	71.61	3,964.6	595.60	157.4	735.1	48.9	0.00	0.00	0.00
4,200.0	23.52	71.61	4,056.3	503.91	170.0	772.9	47.1	0.00	0.00	0.00
4,300.0	23.52	71.61	4,148.0	412.22	182.6	810.8	45.4	0.00	0.00	0.00
4,400.0	23.52	71.61	4,239.7	320.53	195.2	848.7	43.6	0.00	0.00	0.00
4,500.0	23.52	71.61	4,331.4	228.84	207.8	886.6	41.8	0.00	0.00	0.00
4,600.0	23.52	71.61	4,423.0	137.15	220.4	924.4	40.0	0.00	0.00	0.00
4,700.0	23.52	71.61	4,514.7	45.46	233.0	962.3	38.2	0.00	0.00	0.00
4,800.0	23.52	71.61	4,606.4	-46.23	245.6	1,000.2	36.4	0.00	0.00	0.00
END OF TANGENT										
4,873.1	23.52	71.61	4,673.5	-113.25	254.8	1,027.9	35.1	0.00	0.00	0.00
4,900.0	22.99	71.61	4,698.2	-137.97	258.1	1,037.9	34.6	2.00	-2.00	0.00
5,000.0	20.99	71.61	4,790.9	-230.69	269.9	1,073.5	32.9	2.00	-2.00	0.00
5,100.0	18.99	71.61	4,884.9	-324.66	280.7	1,105.9	31.4	2.00	-2.00	0.00
5,200.0	16.99	71.61	4,980.0	-419.77	290.5	1,135.2	30.0	2.00	-2.00	0.00
5,300.0	14.99	71.61	5,076.1	-515.90	299.2	1,161.3	28.8	2.00	-2.00	0.00
5,400.0	12.99	71.61	5,173.1	-612.93	306.8	1,184.3	27.7	2.00	-2.00	0.00
5,500.0	10.99	71.61	5,270.9	-710.74	313.3	1,204.0	26.8	2.00	-2.00	0.00
5,600.0	8.99	71.61	5,369.4	-809.22	318.8	1,220.4	26.0	2.00	-2.00	0.00
5,700.0	6.99	71.61	5,468.4	-908.25	323.2	1,233.6	25.4	2.00	-2.00	0.00
5,800.0	4.99	71.61	5,567.9	-1,007.70	326.5	1,243.5	24.9	2.00	-2.00	0.00
5,900.0	2.99	71.61	5,667.6	-1,107.45	328.7	1,250.1	24.6	2.00	-2.00	0.00
6,000.0	0.99	71.61	5,767.6	-1,207.38	329.8	1,253.4	24.4	2.00	-2.00	0.00
EOD TO VERTICAL										
6,049.3	0.00	71.61	5,816.9	-1,256.68	329.9	1,253.8	24.4	2.00	-2.00	0.00
KOP (12°/100ft BUR)										
6,079.3	0.00	0.00	5,846.9	-1,286.68	329.9	1,253.8	24.4	0.00	0.00	0.00
6,100.0	2.48	180.22	5,867.6	-1,307.38	329.5	1,253.8	24.9	11.99	11.99	0.00
6,200.0	14.48	180.22	5,966.3	-1,406.10	314.7	1,253.7	39.0	12.00	12.00	0.00
6,300.0	26.48	180.22	6,059.8	-1,499.61	279.8	1,253.6	72.6	12.00	12.00	0.00
6,400.0	38.48	180.22	6,144.0	-1,583.81	226.2	1,253.4	124.1	12.00	12.00	0.00
6,500.0	50.48	180.22	6,215.2	-1,655.03	156.3	1,253.1	191.3	12.00	12.00	0.00
6,600.0	62.48	180.22	6,270.3	-1,710.15	73.0	1,252.8	271.3	12.00	12.00	0.00
6,700.0	74.48	180.22	6,307.0	-1,746.76	-19.8	1,252.5	360.5	12.00	12.00	0.00
START OF TANGENT										
6,704.3	75.00	180.22	6,308.1	-1,747.89	-24.0	1,252.4	364.5	12.00	12.00	0.00
6,800.0	75.00	180.22	6,332.9	-1,772.66	-116.4	1,252.1	453.4	0.00	0.00	0.00
END OF TANGENT										
6,804.3	75.00	180.22	6,334.0	-1,773.77	-120.6	1,252.1	457.3	0.00	0.00	0.00
6,900.0	86.48	180.22	6,349.3	-1,789.15	-214.9	1,251.7	548.0	12.00	12.00	0.00
HZ LP: 589.1ft FNL & 1692.8ft FWL of Sec 36										
6,929.3	90.00	180.22	6,350.2	-1,790.05	-244.1	1,251.6	576.1	12.00	12.00	0.00
7,000.0	90.00	180.22	6,350.2	-1,790.05	-314.8	1,251.3	644.1	0.00	0.00	0.00
7,100.0	90.00	180.22	6,350.2	-1,790.05	-414.8	1,250.9	740.2	0.00	0.00	0.00
7,200.0	90.00	180.22	6,350.2	-1,790.05	-514.8	1,250.6	836.3	0.00	0.00	0.00
7,300.0	90.00	180.22	6,350.2	-1,790.05	-614.8	1,250.2	932.4	0.00	0.00	0.00
7,400.0	90.00	180.22	6,350.2	-1,790.05	-714.8	1,249.8	1,028.5	0.00	0.00	0.00
7,500.0	90.00	180.22	6,350.2	-1,790.05	-814.8	1,249.4	1,124.6	0.00	0.00	0.00
7,600.0	90.00	180.22	6,350.2	-1,790.05	-914.8	1,249.0	1,220.7	0.00	0.00	0.00
7,700.0	90.00	180.22	6,350.2	-1,790.05	-1,014.8	1,248.6	1,316.8	0.00	0.00	0.00
7,800.0	90.00	180.22	6,350.2	-1,790.04	-1,114.8	1,248.2	1,412.9	0.00	0.00	0.00
7,900.0	90.00	180.22	6,350.2	-1,790.04	-1,214.8	1,247.9	1,509.0	0.00	0.00	0.00

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well STATE NORTH PLATTE F21-J24-36HNC
Company:	BONANZA CREEK ENERGY INC.	TVD Reference:	KB-EST @ 4560.2usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB-EST @ 4560.2usft
Site:	NW NW SEC. 36 T5N R63W 6th P.M.	North Reference:	True
Well:	STATE NORTH PLATTE F21-J24-36HNC	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Planned Survey

MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,000.0	90.00	180.22	6,350.2	-1,790.04	-1,314.8	1,247.5	1,605.1	0.00	0.00	0.00
8,100.0	90.00	180.22	6,350.2	-1,790.04	-1,414.8	1,247.1	1,701.2	0.00	0.00	0.00
8,200.0	90.00	180.22	6,350.2	-1,790.04	-1,514.8	1,246.7	1,797.3	0.00	0.00	0.00
8,300.0	90.00	180.22	6,350.2	-1,790.04	-1,614.8	1,246.3	1,893.4	0.00	0.00	0.00
8,400.0	90.00	180.22	6,350.2	-1,790.04	-1,714.8	1,245.9	1,989.5	0.00	0.00	0.00
8,500.0	90.00	180.22	6,350.2	-1,790.04	-1,814.8	1,245.5	2,085.6	0.00	0.00	0.00
8,600.0	90.00	180.22	6,350.2	-1,790.04	-1,914.8	1,245.1	2,181.8	0.00	0.00	0.00
8,700.0	90.00	180.22	6,350.2	-1,790.04	-2,014.8	1,244.8	2,277.9	0.00	0.00	0.00
8,800.0	90.00	180.22	6,350.2	-1,790.04	-2,114.8	1,244.4	2,374.0	0.00	0.00	0.00
8,900.0	90.00	180.22	6,350.2	-1,790.04	-2,214.8	1,244.0	2,470.1	0.00	0.00	0.00
9,000.0	90.00	180.22	6,350.2	-1,790.03	-2,314.8	1,243.6	2,566.2	0.00	0.00	0.00
9,100.0	90.00	180.22	6,350.2	-1,790.03	-2,414.8	1,243.2	2,662.3	0.00	0.00	0.00
9,200.0	90.00	180.22	6,350.2	-1,790.03	-2,514.8	1,242.8	2,758.4	0.00	0.00	0.00
9,300.0	90.00	180.22	6,350.2	-1,790.03	-2,614.8	1,242.4	2,854.5	0.00	0.00	0.00
9,400.0	90.00	180.22	6,350.2	-1,790.03	-2,714.8	1,242.0	2,950.6	0.00	0.00	0.00
9,500.0	90.00	180.22	6,350.2	-1,790.03	-2,814.8	1,241.6	3,046.7	0.00	0.00	0.00
9,600.0	90.00	180.22	6,350.2	-1,790.03	-2,914.8	1,241.3	3,142.8	0.00	0.00	0.00
9,700.0	90.00	180.22	6,350.2	-1,790.03	-3,014.8	1,240.9	3,238.9	0.00	0.00	0.00
9,800.0	90.00	180.22	6,350.2	-1,790.02	-3,114.8	1,240.5	3,335.0	0.00	0.00	0.00
9,900.0	90.00	180.22	6,350.2	-1,790.02	-3,214.8	1,240.1	3,431.1	0.00	0.00	0.00
10,000.0	90.00	180.22	6,350.2	-1,790.02	-3,314.8	1,239.7	3,527.2	0.00	0.00	0.00
10,100.0	90.00	180.22	6,350.2	-1,790.02	-3,414.8	1,239.3	3,623.3	0.00	0.00	0.00
10,200.0	90.00	180.22	6,350.2	-1,790.02	-3,514.8	1,238.9	3,719.4	0.00	0.00	0.00
10,300.0	90.00	180.22	6,350.2	-1,790.02	-3,614.8	1,238.5	3,815.5	0.00	0.00	0.00
10,400.0	90.00	180.22	6,350.2	-1,790.01	-3,714.8	1,238.1	3,911.6	0.00	0.00	0.00
10,500.0	90.00	180.22	6,350.2	-1,790.01	-3,814.8	1,237.7	4,007.7	0.00	0.00	0.00
10,600.0	90.00	180.22	6,350.2	-1,790.01	-3,914.8	1,237.3	4,103.8	0.00	0.00	0.00
10,700.0	90.00	180.23	6,350.2	-1,790.01	-4,014.8	1,237.0	4,200.0	0.00	0.00	0.00
10,800.0	90.00	180.23	6,350.2	-1,790.01	-4,114.8	1,236.6	4,296.1	0.00	0.00	0.00
10,900.0	90.00	180.23	6,350.2	-1,790.00	-4,214.8	1,236.2	4,392.2	0.00	0.00	0.00
11,000.0	90.00	180.23	6,350.2	-1,790.00	-4,314.8	1,235.8	4,488.3	0.00	0.00	0.00
BHL: 470ft FSL & 1729ft FWL of Sec 36										
11,045.6	90.00	180.23	6,350.2	-1,790.00	-4,360.4	1,235.6	4,532.1	0.00	0.00	0.00

Plan Annotations

MD (usft)	TVD (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
0.0	0.0	0.0	0.0	SHL: 337ft FNL & 439ft FWL of Sec 36
700.0	700.0	0.0	0.0	START NUDGE (2°/100ft BUR)
950.0	949.7	-8.4	7.0	EOB TO 5° INC
1,602.8	1,600.0	-51.9	43.6	SURFACE CASING
1,702.8	1,699.6	-58.6	49.2	END OF TANGENT
1,983.5	1,979.5	-64.1	68.7	EOT TO 71.61° AZ
2,909.8	2,873.3	7.5	284.3	EOB TO 23.52° INC
4,873.1	4,673.5	254.8	1,027.9	END OF TANGENT
6,049.3	5,816.9	329.9	1,253.8	EOD TO VERTICAL
6,079.3	5,846.9	329.9	1,253.8	KOP (12°/100ft BUR)
6,704.3	6,308.1	-24.0	1,252.4	START OF TANGENT
6,804.3	6,334.0	-120.6	1,252.1	END OF TANGENT
6,929.3	6,350.2	-244.1	1,251.6	HZ LP: 589.1ft FNL & 1692.8ft FWL of Sec 36
11,045.6	6,350.2	-4,360.4	1,235.6	BHL: 470ft FSL & 1729ft FWL of Sec 36