

NOBLE ENERGY INC.
Wells Ranch USX AA33-08
SENE 33-6N-63W
1896 FNL & 551 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A

API: 05-123-26416
COGCC #

GL Elev: 4782'
KB Elev: 4795'

Spud Date: 10/14/2007

Surface Casing :
8-5/8" 24# J-55 @ 563'
Cement: 293 sx
TOC: Surface


WW	400	600
SC	563	763

No Sussex completions within 1 mile

TOC @ 1790'

Nio Top 6520'

Production Casing :
4-1/2" 11.60# M-80 @ 6980'
Cement: 860 sx
TD Date: 10/17/2007

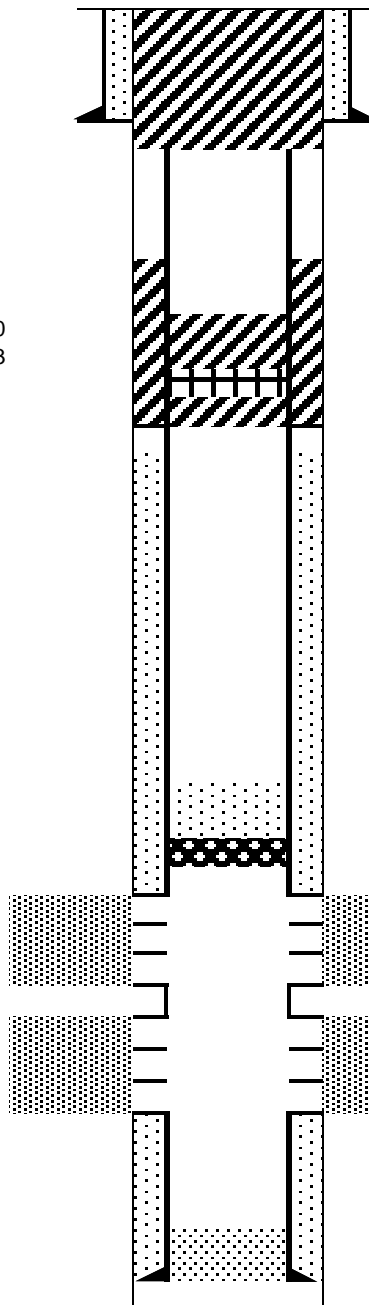

Cut surface casing off 6'-8' below surface.

Cut production casing at 763'
Cmt to surface with 270 sx

Pump 210 sx plug through/on CICR
Cmt Coverage inside PC: 1511'
Cmt Coverage outside PC: 1240'
Set CICR at 1640'
Shoot sqz perfs at 1740'

Set CIBP at 6480' with 2 sx cement
New TOC: 6454'

Niobrara Perforations 6530'-
6546' & 6614'-6630'

Codell Perforations 6787'-6798'

TD: 6988'