

NOBLE ENERGY INC.
 Wells Ranch USX BB05-11
 NESW 5-5N-63W
 2062 FSL & 2085 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A

API: 05-123-26211
 COGCC #

GL Elev: 4704'
 KB Elev: 4716'

Spud Date: 9/1/2007

Surface Casing :
 8-5/8" 24# J-55 @ 486'
 Cement: 253 sx
 TOC: Surface


WW	N/A	
SC	486	686
FH	390	590

No Sussex completions within 1 mile

TOC @ 2526'

Nio Top 6552'

Production Casing :
 4-1/2" 11.60# M-80 @ 6995'
 Cement: 1000 sx
 TD Date: 9/4/2007

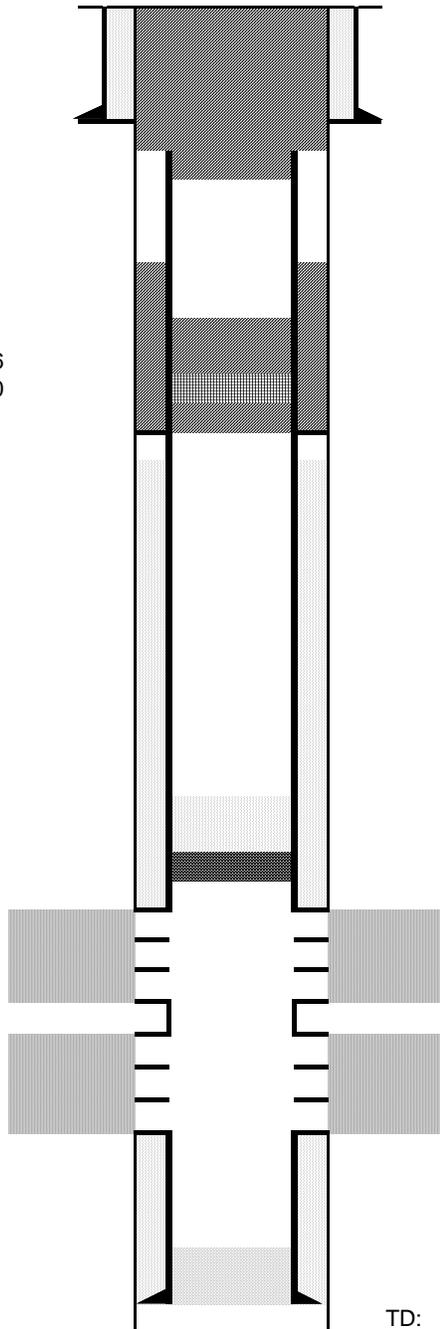

Cut surface casing off 6'-8' below surface.

Cut production casing at 686'
 Cmt to surface from 50' in csg stub (736')
 with 250 sx cmt

Pump 210 sx plug through/on CICR
 Cmt Coverage inside PC: 2281'
 Cmt Coverage outside PC: 2010'
 Set CICR at 2410'
 Shoot sqz perms at 2510'

Set CIBP at 6506' with 2 sx cement
 New TOC: 6480'

Niobrara Perforations 6556'-
 6570' & 6608'-6622'

Codell Perforations 6786'-6796'

TD: 6998'