

**NOBLE ENERGY INC.**  
Wells Ranch USX BB05-12  
NWSW 5-5N-63W  
1865 FSL & 765 FWL  
WELD COUNTY, CO  
Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
with PROPOSED P&A

API: 05-123-26231  
COGCC #

GL Elev: 4692'  
KB Elev: 4704'

**Spud Date:** 9/5/2007

**Surface Casing :**  
8-5/8" 24# J-55 @ 478'  
Cement: 238 sx  
TOC: Surface


<b>WW</b>	N/A	
<b>SC</b>	478	678
<b>FH</b>	376	576

**No Sussex completions within 1 mile**

**TOC @ 2048'**

**Nio Top 6494'**

**Production Casing :**  
4-1/2" 11.60# M-80 @ 6967'  
Cement: 1000 sx  
TD Date: 9/8/2007

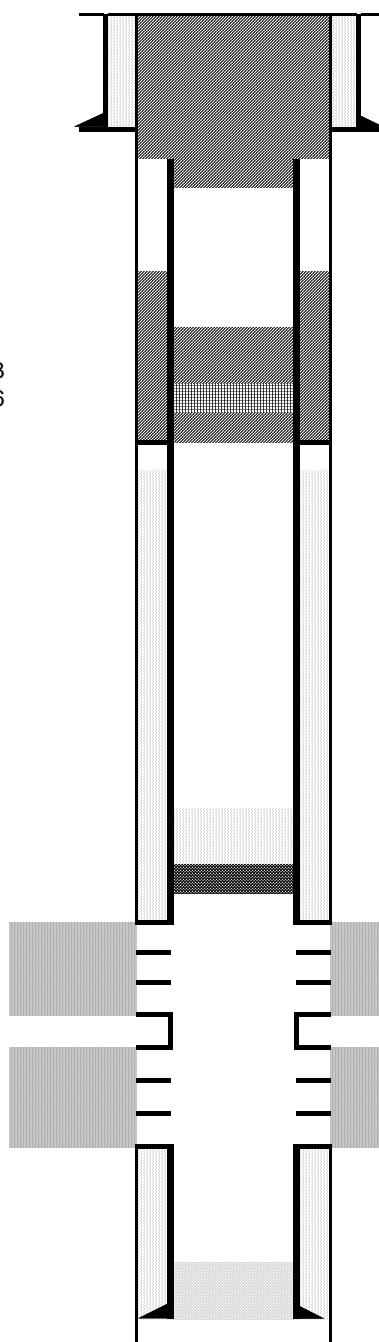

Cut surface casing off 6'-8' below surface.

Cut production casing at 678'  
Cmt to surface from 50' in csg stub (728')  
with 250 sx cmt

Pump 210 sx plug through/on CICR  
Cmt Coverage inside PC: 1791'  
Cmt Coverage outside PC: 1520'  
Set CICR at 1920'  
Shoot sqz perms at 2020'

Set CIBP at 6540' with 2 sx cement  
New TOC: 6514'

Niobrara Perforations 6590'-6608'

Codell Perforations 6769'-6779'

TD: 6971'