

NOBLE ENERGY INC.
Wells Ranch USX BB03-11
NESW 3-5N-63W
1925 FSL & 2039 FWL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A

API: 05-123-26275
COGCC #

GL Elev: 4710'
KB Elev: 4722'

Spud Date: 9/17/2007

Surface Casing :

8-5/8" 24# J-55 @ 481'
Cement: 254 sx
TOC: Surface

WW	N/A	
SC	481	681
FH	397	597


No Sussex completions within 1 mile

TOC @ 1828'

Nio Top 6417'

Production Casing :

4-1/2" 11.60# M-80 @ 6859'
Cement: 880 sx
TD Date: 9/29/2007

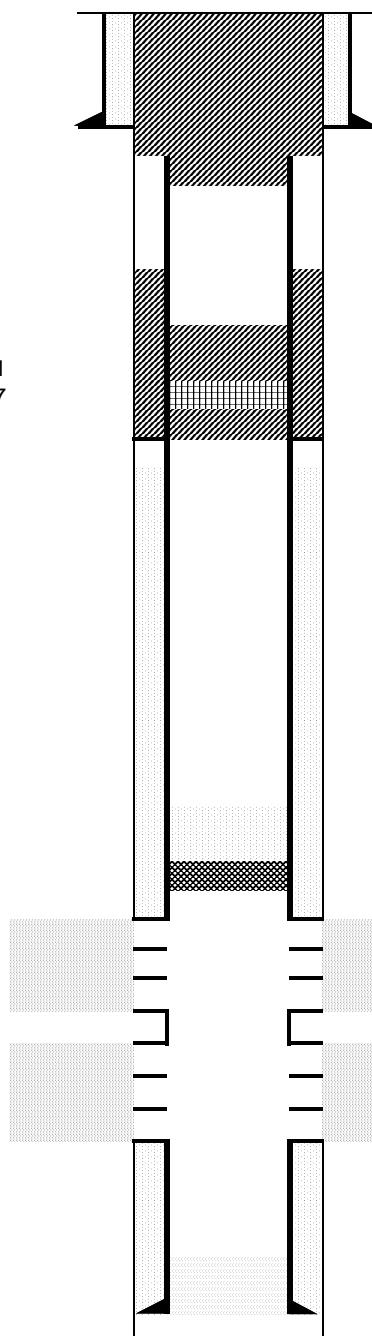

Cut surface casing off 6'-8' below surface.

Cut production casing at 681'
Cmt to surface from 50' in csg stub (731')
with 250 sx cmt

Pump 210 sx plug through/on CICR
Cmt Coverage inside PC: 1551'
Cmt Coverage outside PC: 1280'
Set CICR at 1680'
Shoot sqz perfs at 1780'

Set CIBP at 6376' with 2 sx cement
New TOC: 6350'

Niobrara Perforations 6426'-
6442' & 6520'-6532'

Codell Perforations 6690'-6700'

TD: 6906'