

NOBLE ENERGY INC.
Wells Ranch USX BB03-14
SESW 3-5N-63W
556 FSL & 1944 FWL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A

API: 05-123-26320
COGCC #

GL Elev: 4710'
KB Elev: 4722'

Spud Date: 9/17/2007

Surface Casing :

8-5/8" 24# J-55 @ 482'
Cement: 257 sx
TOC: Surface

WW	N/A	
SC	482	682
FH	397	597


No Sussex completions within 1 mile

TOC @ 1756'

Nio Top 6410'

Production Casing :

4-1/2" 11.60# M-80 @ 6902'
Cement: 940 sx
TD Date: 9/20/2007

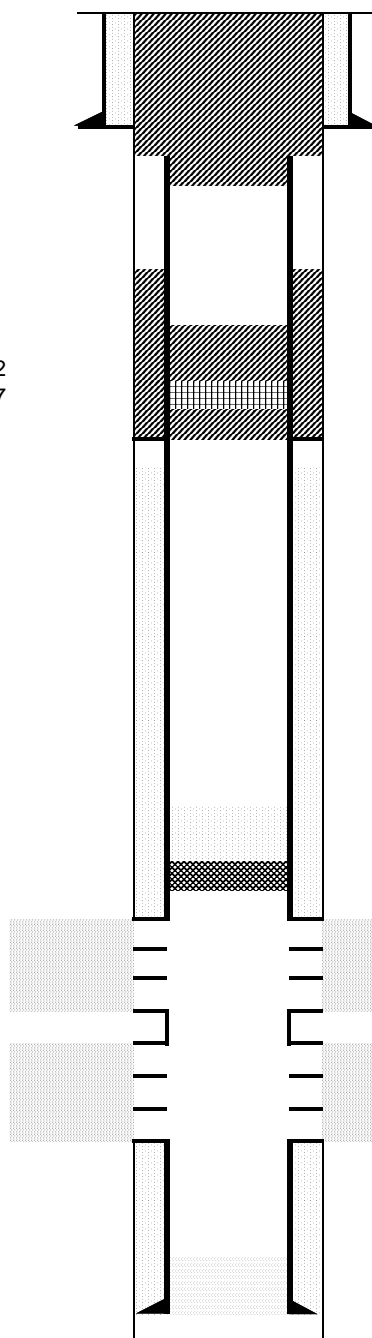

Cut surface casing off 6'-8' below surface.

Cut production casing at 682'
Cmt to surface fom 50' in csg stub (732')
with 250 sx cmt

Pump 210 sx plug through/on CICR
Cmt Coverage inside PC: 1491'
Cmt Coverage outside PC: 1220'
Set CICR at 1620'
Shoot sqz perfs at 1720'

Set CIBP at 6365' with 2 sx cement
New TOC: 6339'

Niobrara Perforations 6415'-
6431' & 6516'-6532'

Codell Perforations 6694'-6704'

TD: 6906'