

NOBLE ENERGY INC.
 Briggs 15-33
 SWSE 33-T6N-R64W
 645 FSL & 1985 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A

API: 05-123-21809
 COGCC #

GL Elev: 4630'
 KB Elev: 4642'

Spud Date: 11/20/2003

Surface Casing :
 8-5/8", J-55, 24# @ 664'
 Cement: 465 sx
 TOC: Surface


WW	700	900
SC	664	864
FH	290	490

No Sussex completions within 1 mile

TOC @ 6034'

Nio Top 6589'

Production Casing :
 4-1/2", I-80, 11.6# @ 6980'
 Cement: 175 sx
 TD Date: 11/25/2003

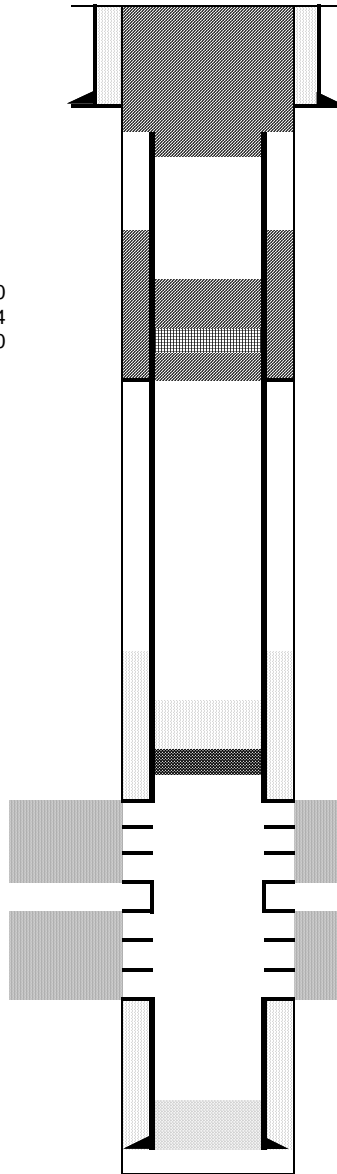

Cut surface casing off 6'-8' below surface.

Cut production casing at 900'
 Cmt to surface with 330 sx

Pump 240 sx plug through/on CICR
 Cmt Coverage inside PC: 2271'
 Cmt Coverage outside PC: 2000'-2500'
 Set CICR at 2400'
 Shoot sqz perms at 2500'

Set CIBP at 6542' with 2 sx cement
 New TOC: 6517'

Niobrara Perforations: 6592' - 6764'

Codell Perforations: 6828' - 6842'

TD: 6988'