

NOBLE ENERGY INC.
 Owens 14-34
 SESW 34-4N-65W
 665 FSL & 1795 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/7/2017

API: 05-123-16840
 COGCC #


GL Elev: 4752'
 KB Elev: 4762'

Spud Date: 3/9/1993

Surface Casing :
 8-5/8", 24# @ 432'
 Cement: 360 sx
 TOC: Surface

TOC @ 6,115'

Production Casing :
 4-1/2", 11.6# @ 7,235'
 Cement: 515 sx
 TD: 7248'

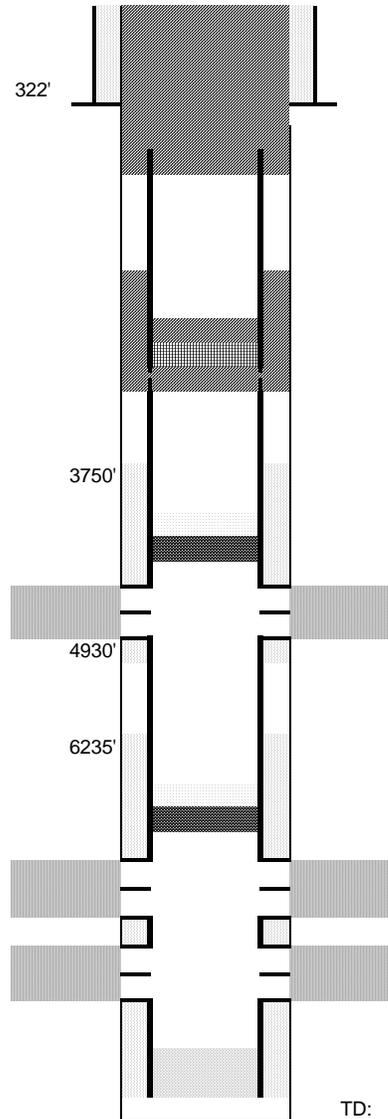

Cut surface casing off 6'-8' below surface.

Pump 230 sx shoe plug from 632' to surface.
 Cut csg @ 632'

Pump 200 sx through; last 2 sx dropped on top of CICR.
 Set CICR @ 2,272'
 Perforate csg @ 2,372'

CIBP @ 4373' w/ 2 sx cement on top

Sussex Perforations: 4423' - 4428'

CIBP @ 6772' w/ 2 sx cement on top

Niobrara Perforations: 6822' - 6994'

Codell Perforations: 7090' - 7101'

TD: 7248'