

**NOBLE ENERGY INC.**  
 Webster 9-32  
 NESE 32-6N-64W  
 1980 FSL & 660 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 2/21/2017

API: 05-123-13163  
 COGCC #


GL Elev: 4,630  
 KB Elev: 4,641

**Spud Date:** 9/20/1986

**Surface Casing :**  
 8-5/8", J-55, 24# @ 315'  
 Cement: 275 sx  
 TOC: Surface

**TOC @ 5986'**

**Production Casing :**  
 4-1/2", N-80, 15.1# @ 7013'  
 Cement: 230 sx  
 TD: 7020

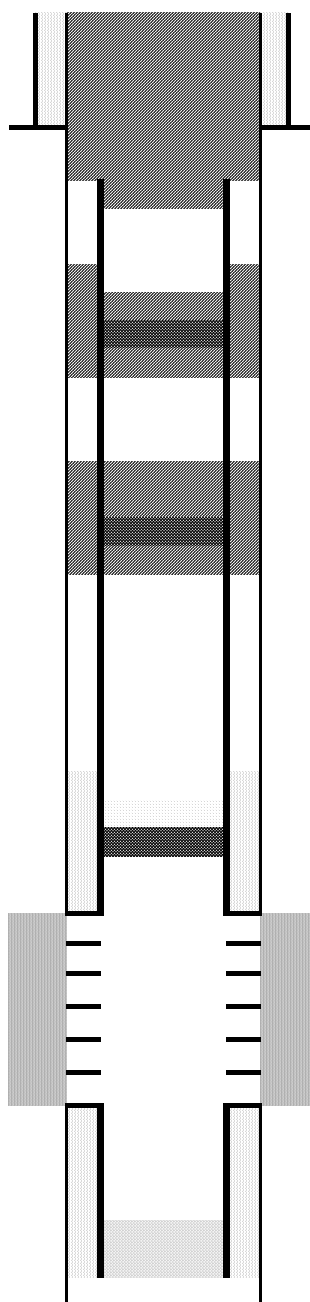

Cut surface casing off 6'-8' below surface.

Pump 145 sx shoe plug from 465'  
 Cut csg @ 415'

Pump 200 sx plug thru CICR & 10 sx above CICR  
 Set CICR @ 2400'  
 Perforate csg @ 2500'

Pump 280 sx plug thru CICR & 43 sx above CICR  
 Set CICR @ 3902'  
 Perforate csg @ 4002'

CIBP @ 6,530' w/ 2 sx cement on top

Niobrara Perforations: 6,580' - 6778'

Codell Perforations: 6869' - 6880'

TD: 7,020