



New Day Set-Up

Well Name: Gibson Gulch Unit 4-33

Job Type: Reconfigure Tubing/Components

Date: 9/28/2017, Report #: 1.0, DFS: 5,616.25

Click on the 'New' button to start a new daily report.

Report Start Date 9/27/2017 06:00				Report End Date 9/28/2017 06:00			
Operations Summary MIRU MWS #3 AND RELATED EQUIPMENT, PULL AND LD TBG, PU AND RIH W/PLUGGED PACKER, SET ABOVE PERF'S TO ISOLATE PRODUCTION ZONE FROM SURFACE. LAND WELL RDMO							
Operations Next Report Period NO PRODUCTION							
Daily Contacts							
Job Contact							
JOHN RANTS, <title>							
Time Log							
Start Date	End Date	Dur (hr)	Cum Dur (hr)	Code 1	Code 2	Unschd Type	Com
9/27/2017	9/27/2017	1.00	1.00	RMOV	Rig Move		MOVE RIG OVER FROM 14A WELL TO 14A WELL AND RIG UP
9/27/2017	9/27/2017	1.00	2.00	BOPI	Install BOP's		ND WELL HEAD, NU BOP'S
9/27/2017	9/27/2017	2.00	4.00	PULT	Pull Tubing		PULL AND LD 177 JTS TBG,
9/27/2017	9/27/2017	3.00	7.00	RUTB	Run Tubing		MAKE UP PLUGGED PACKER BHA. XX PLUG SET IN X-NIPPLE ON BOTTOM OF 4.5" MODEL R PACKER FOR 2 3/8 TBG, RIH W/ 159 JTS 2 3/8 4.7" J-55 TBG AND PERFORATED SUB ON PACKER, SET IN 15K COMPRESSION.
9/27/2017	9/27/2017	1.00	8.00	BOPR	Remove BOP's		ND BOP'S NU WELL HEAD, CIRCULATE 76 BLS PACKER FLUID, PRESSURE TEST TO 1500 PSI FOR 15 MIN, BLEED DOWN PRESSURE.
9/27/2017	9/27/2017	1.00	9.00	SRIG	Rig Up/Down		RDMO
9/27/2017	9/28/2017	15.00	24.00	inactive	inactive		


Tubing

Well Name: Gibson Gulch Unit 4-33

API/UWI 05-045-08097	Surface Legal Location SWSW-28-6S-91W-W6M	Field Name Gibson Gulch	License #	State/Province Colorado	Well Configuration Type
Original KB Elevation (ft)	KB-Tubing Head Distance (ft)	Spud Date 5/14/2002 00:00	Rig Release Date	PSTD (Alt) (ftKB)	Total Depth Alt (TVD) (ftKB)

Main Hole: 9/27/2017 8:00:00 AM

Vertical schematic (actual)

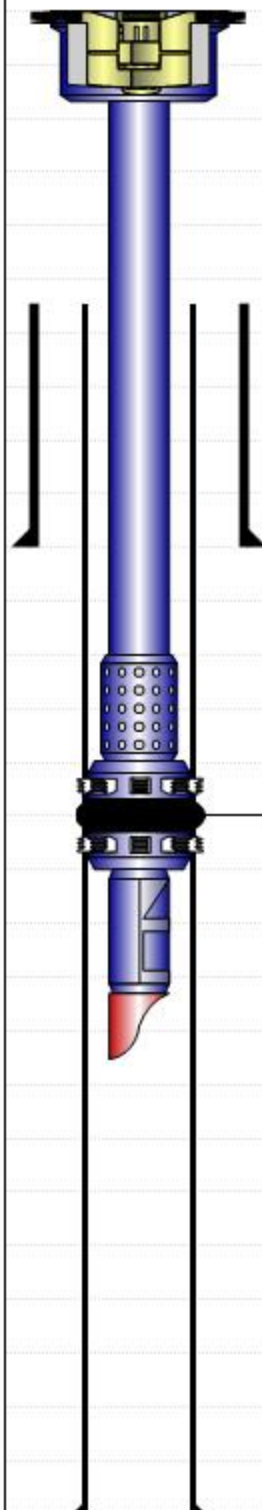

Tubing

Tubing Description						Set Depth (ftKB)		Run Date		Pull Date	
Tubing - Workstring						5,008.1		9/27/2017			
Jts	Item Des	OD (in)	ID (in)	Wt (lb/ft)	Grade	Top Thread	Len (ft)	Top (ftKB)	Bot (ftKB)		
1	Tubing Hanger	7	2.00			8-rd. e.u.e.	0.85	0.0	0.8		
159	Tubing	2 3/8	2.00	4.70	J-55	8-rd. e.u.e.	4,994.50	0.8	4,995.3		
1	Perforated Joint	3	2.00			8-rd. e.u.e.	4.57	4,995.3	4,999.9		
1	Packer Baker model R set in 15k compression	4	2.00			8-rd. e.u.e.	6.55	4,999.9	5,006.5		
1	Profile Nipple X-nipple w/XX plug	2 3/8	1.88			8-rd. e.u.e.	1.20	5,006.5	5,007.7		
1	Mule Shoe tbg collar	2 3/8				8-rd. e.u.e.	0.40	5,007.7	5,008.1		
	TOP PERF 5039	2 3/8				8-rd. e.u.e.		5,008.1	5,008.1		
	BOT PERF 5700	2 3/8				8-rd. e.u.e.		5,008.1	5,008.1		