

US ROCKIES WATTENBERG PLANNING

WELD-NAD83-UTMFT13N

2N-65W-25 George 7-25HZ Pad

GEORGE 25-7HZ

Plan A

Plan: Permit Rev-1

SHL Latitude/Longitude: 40.110298/-104.610017

Survey Program: MWD+IFR+MSA

Standard Planning Report

18 August, 2017



Azimuths to True North
Magnetic North: 7.93°

Magnetic Field
Strength: 52345.1snT
Dip Angle: 66.63°
Date: 8/16/2017
Model: IGRF2010

SITE: 2N-65W-25 George 7-25HZ Pad

Well: GEORGE 25-7HZ
Wellbore: Plan A
Design: Permit Rev-1

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
1369.00	1385.66	Fox Hills
3964.00	4292.05	Parkman
4417.00	4805.11	Sussex
6812.00	7338.90	Sharon Springs
6852.00	7407.07	Niobrara
6929.00	7593.44	Nio B

CASING DETAILS

TVD	MD	Name	Size
1500.00	1523.46	9 5/8" Csg	9-5/8
6954.00	7773.05	Top of Production	5-1/2

DESIGN TARGET DETAILS



Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
GEORGE 25-7HZ_tgt	6951.35	-3091.32	1928.63	14564054.06	1751398.16	40.101809	-104.603120
GEORGE 25-7HZ_BHL6946.00		-8663.66	1920.03	14558481.74	1751414.00	40.086506	-104.603152

WELL DETAILS: GEORGE 25-7HZ

+N/-S	+E/-W	GL: 4900.00 Northing	RKB = 17' @ 4917.00usft (Drilling Rig) Easting	Latitude	Longitude	Slot
0.00	0.00	14567136.90	1749455.99	40.110298	-104.610017	

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	Vsect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00
2116.67	28.00	82.00	2043.25	62.23	442.76	1.50	-69.71
4906.67	28.00	82.00	4506.67	244.52	1739.83	0.00	-273.94
6306.67	0.00	0.00	5851.61	291.19	2071.90	2.00	-326.22
6772.44	0.00	0.00	6317.38	291.19	2071.90	0.00	-326.22
7773.05	90.06	182.43	6954.00	-345.48	2044.93	9.00	310.81
10521.36	90.06	182.43	6951.35	-3091.32	1928.63	0.00	3058.23
10639.46	90.06	180.06	6951.24	-3209.38	1926.07	2.00	3176.32
16093.74	90.06	180.06	6946.00	-8663.66	1920.03	0.00	8629.92

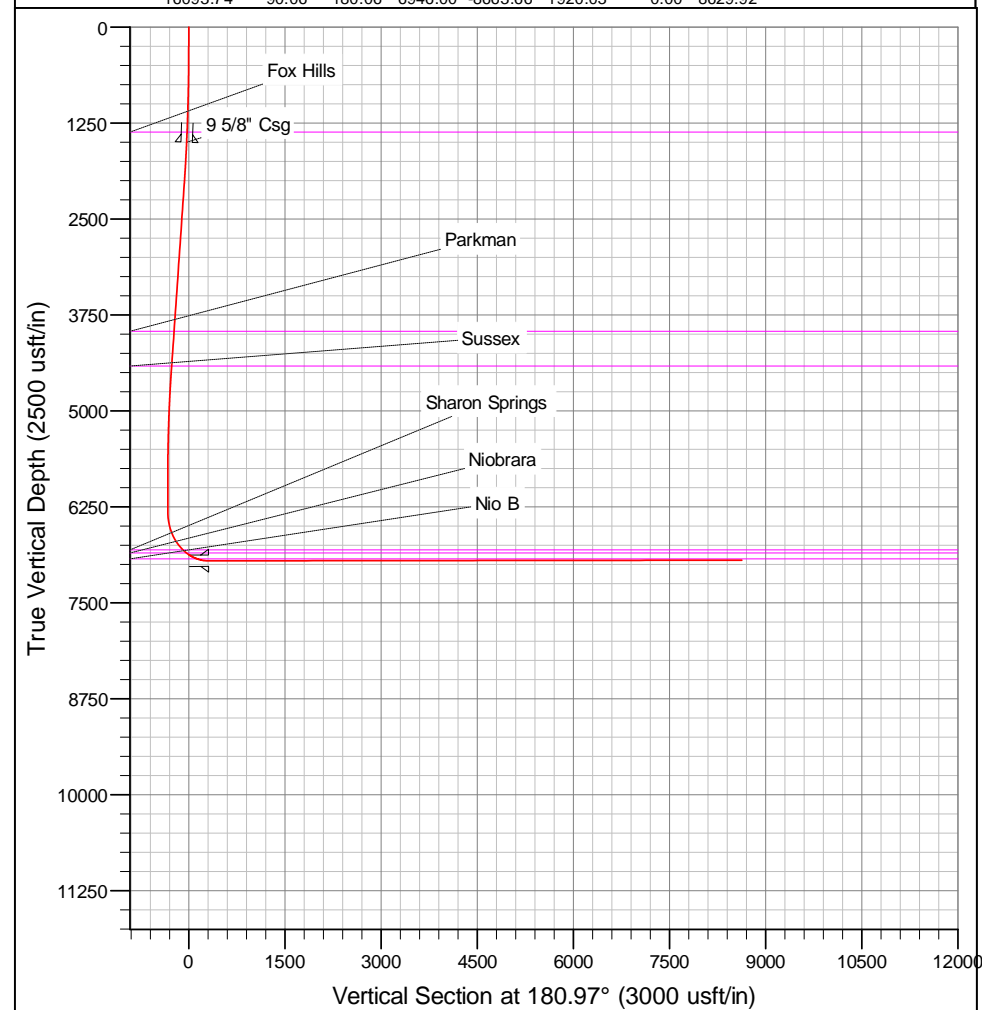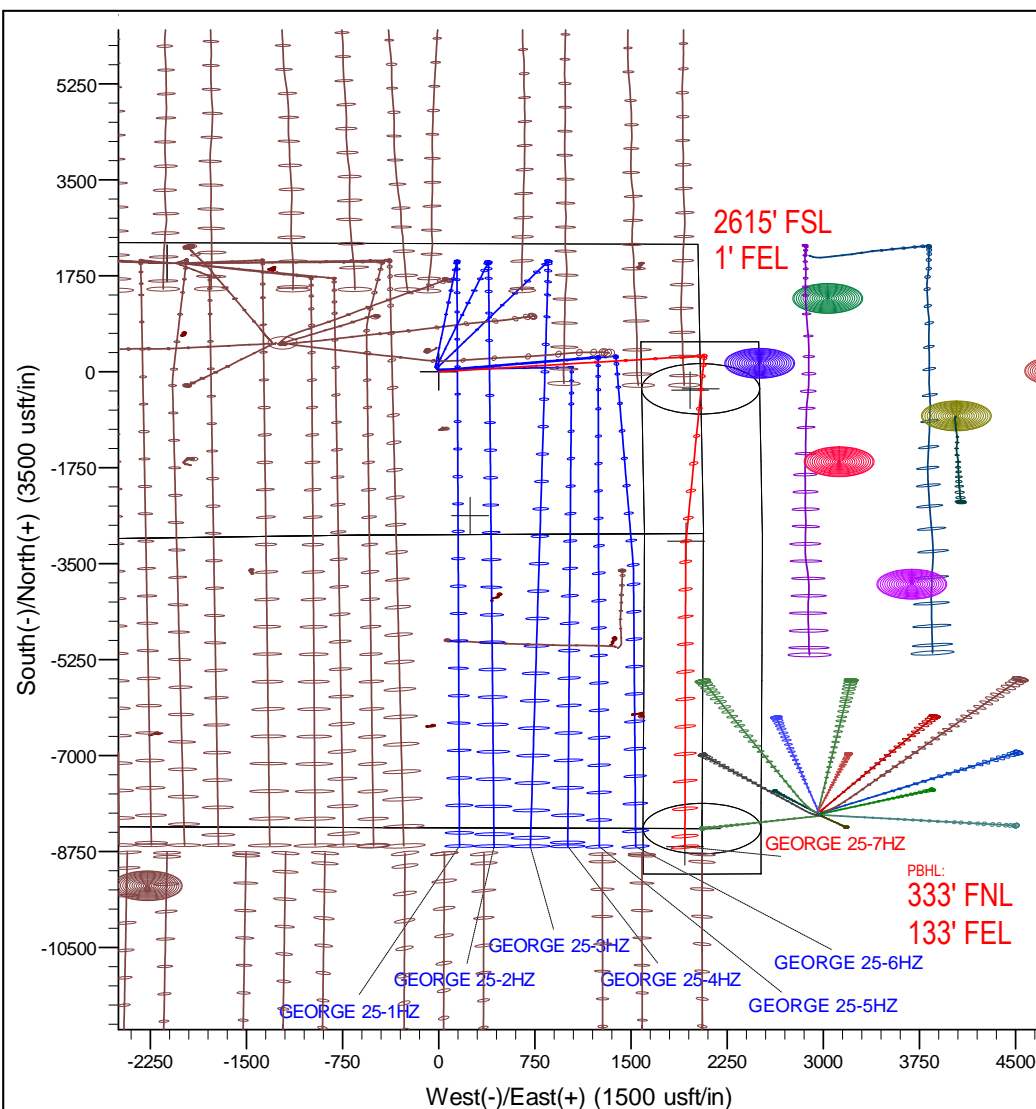

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well GEORGE 25-7HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Site:	2N-65W-25 George 7-25HZ Pad	North Reference:	True
Well:	GEORGE 25-7HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Project	WELD-NAD83-UTMFT13N		
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Zone 13N (108 W to 102 W)		

Site	2N-65W-25 George 7-25HZ Pad				
Site Position:		Northing:	14,567,222.71 usft	Latitude:	40.110534
From:	Lat/Long	Easting:	1,749,428.22 usft	Longitude:	-104.610115
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.25

Well	GEORGE 25-7HZ					
Well Position	+N/-S	-85.94 usft	Northing:	14,567,136.89 usft	Latitude:	40.110298
	+E/-W	27.40 usft	Easting:	1,749,455.99 usft	Longitude:	-104.610017
Position Uncertainty		3.28 usft	Wellhead Elevation:		Ground Level:	4,900.00 usft

Wellbore	Plan A				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	8/16/2017	7.93	66.63	52,345.14936955

Design	Permit Rev-1				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	180.97	

Plan Survey Tool Program		Date	8/18/2017		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	1,500.00	Permit Rev-1 (Plan A)	APC_ISCWSA REV 2 MWD+II Fixed:v2:crustal field declinatio	
2	1,500.00	16,093.74	Permit Rev-1 (Plan A)	APC_ISCWSA REV 2 MWD+II Fixed:v2:Rockies, crustal dec +	

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well GEORGE 25-7HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Site:	2N-65W-25 George 7-25HZ Pad	North Reference:	True
Well:	GEORGE 25-7HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,116.67	28.00	82.00	2,043.25	62.23	442.76	1.50	1.50	0.00	82.00	
4,906.67	28.00	82.00	4,506.67	244.52	1,739.83	0.00	0.00	0.00	0.00	
6,306.67	0.00	0.00	5,851.61	291.19	2,071.90	2.00	-2.00	-5.86	-180.00	
6,772.44	0.00	0.00	6,317.38	291.19	2,071.90	0.00	0.00	0.00	0.00	
7,773.05	90.06	182.43	6,954.00	-345.48	2,044.93	9.00	9.00	-17.75	182.43	
10,521.36	90.06	182.43	6,951.35	-3,091.32	1,928.63	0.00	0.00	0.00	0.00	GEORGE 25-7HZ_tgt
10,639.46	90.06	180.06	6,951.24	-3,209.38	1,926.07	2.00	0.00	-2.00	-90.00	
16,093.74	90.06	180.06	6,946.00	-8,663.66	1,920.03	0.00	0.00	0.00	0.00	GEORGE 25-7HZ_BH

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well GEORGE 25-7HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Site:	2N-65W-25 George 7-25HZ Pad	North Reference:	True
Well:	GEORGE 25-7HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 1.50									
300.00	0.75	82.00	300.00	0.05	0.32	-0.05	1.50	1.50	0.00
400.00	2.25	82.00	399.96	0.41	2.92	-0.46	1.50	1.50	0.00
500.00	3.75	82.00	499.82	1.14	8.10	-1.28	1.50	1.50	0.00
600.00	5.25	82.00	599.51	2.23	15.87	-2.50	1.50	1.50	0.00
700.00	6.75	82.00	698.96	3.68	26.22	-4.13	1.50	1.50	0.00
800.00	8.25	82.00	798.10	5.50	39.14	-6.16	1.50	1.50	0.00
900.00	9.75	82.00	896.87	7.68	54.63	-8.60	1.50	1.50	0.00
1,000.00	11.25	82.00	995.19	10.21	72.68	-11.44	1.50	1.50	0.00
1,100.00	12.75	82.00	1,093.00	13.11	93.27	-14.69	1.50	1.50	0.00
1,200.00	14.25	82.00	1,190.24	16.36	116.39	-18.32	1.50	1.50	0.00
1,300.00	15.75	82.00	1,286.83	19.96	142.01	-22.36	1.50	1.50	0.00
1,385.66	17.03	82.00	1,369.00	23.32	165.95	-26.13	1.50	1.50	0.00
Fox Hills									
1,400.00	17.25	82.00	1,382.71	23.91	170.14	-26.79	1.50	1.50	0.00
1,500.00	18.75	82.00	1,477.81	28.21	200.74	-31.61	1.50	1.50	0.00
1,523.46	19.10	82.00	1,500.00	29.27	208.27	-32.79	1.50	1.50	0.00
9 5/8" Csg									
1,600.00	20.25	82.00	1,572.07	32.86	233.79	-36.81	1.50	1.50	0.00
1,700.00	21.75	82.00	1,665.43	37.84	269.28	-42.40	1.50	1.50	0.00
1,800.00	23.25	82.00	1,757.81	43.17	307.18	-48.36	1.50	1.50	0.00
1,900.00	24.75	82.00	1,849.16	48.83	347.45	-54.71	1.50	1.50	0.00
2,000.00	26.25	82.00	1,939.42	54.82	390.08	-61.42	1.50	1.50	0.00
2,100.00	27.75	82.00	2,028.52	61.14	435.04	-68.50	1.50	1.50	0.00
2,116.67	28.00	82.00	2,043.25	62.23	442.76	-69.71	1.50	1.50	0.00
Start 2790.00 hold at 2116.67 MD									
2,200.00	28.00	82.00	2,116.83	67.67	481.50	-75.81	0.00	0.00	0.00
2,300.00	28.00	82.00	2,205.12	74.20	527.99	-83.13	0.00	0.00	0.00
2,400.00	28.00	82.00	2,293.42	80.74	574.48	-90.45	0.00	0.00	0.00
2,500.00	28.00	82.00	2,381.71	87.27	620.97	-97.77	0.00	0.00	0.00
2,600.00	28.00	82.00	2,470.01	93.81	667.46	-105.09	0.00	0.00	0.00
2,700.00	28.00	82.00	2,558.30	100.34	713.95	-112.41	0.00	0.00	0.00
2,800.00	28.00	82.00	2,646.60	106.87	760.44	-119.73	0.00	0.00	0.00
2,900.00	28.00	82.00	2,734.89	113.41	806.93	-127.05	0.00	0.00	0.00
3,000.00	28.00	82.00	2,823.19	119.94	853.42	-134.37	0.00	0.00	0.00
3,100.00	28.00	82.00	2,911.48	126.47	899.91	-141.69	0.00	0.00	0.00
3,200.00	28.00	82.00	2,999.78	133.01	946.40	-149.01	0.00	0.00	0.00
3,300.00	28.00	82.00	3,088.07	139.54	992.89	-156.33	0.00	0.00	0.00
3,400.00	28.00	82.00	3,176.37	146.08	1,039.38	-163.65	0.00	0.00	0.00
3,500.00	28.00	82.00	3,264.66	152.61	1,085.87	-170.97	0.00	0.00	0.00
3,600.00	28.00	82.00	3,352.95	159.14	1,132.36	-178.29	0.00	0.00	0.00
3,700.00	28.00	82.00	3,441.25	165.68	1,178.85	-185.61	0.00	0.00	0.00
3,800.00	28.00	82.00	3,529.54	172.21	1,225.34	-192.93	0.00	0.00	0.00
3,900.00	28.00	82.00	3,617.84	178.74	1,271.83	-200.25	0.00	0.00	0.00
4,000.00	28.00	82.00	3,706.13	185.28	1,318.32	-207.57	0.00	0.00	0.00
4,100.00	28.00	82.00	3,794.43	191.81	1,364.81	-214.89	0.00	0.00	0.00
4,200.00	28.00	82.00	3,882.72	198.35	1,411.30	-222.21	0.00	0.00	0.00
4,292.05	28.00	82.00	3,964.00	204.36	1,454.10	-228.95	0.00	0.00	0.00
Parkman									
4,300.00	28.00	82.00	3,971.02	204.88	1,457.79	-229.53	0.00	0.00	0.00

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well GEORGE 25-7HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Site:	2N-65W-25 George 7-25HZ Pad	North Reference:	True
Well:	GEORGE 25-7HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,400.00	28.00	82.00	4,059.31	211.41	1,504.28	-236.85	0.00	0.00	0.00
4,500.00	28.00	82.00	4,147.61	217.95	1,550.77	-244.17	0.00	0.00	0.00
4,600.00	28.00	82.00	4,235.90	224.48	1,597.26	-251.49	0.00	0.00	0.00
4,700.00	28.00	82.00	4,324.20	231.01	1,643.75	-258.81	0.00	0.00	0.00
4,800.00	28.00	82.00	4,412.49	237.55	1,690.24	-266.13	0.00	0.00	0.00
4,805.11	28.00	82.00	4,417.00	237.88	1,692.62	-266.50	0.00	0.00	0.00
Sussex									
4,900.00	28.00	82.00	4,500.79	244.08	1,736.74	-273.45	0.00	0.00	0.00
4,906.67	28.00	82.00	4,506.67	244.52	1,739.83	-273.94	0.00	0.00	0.00
Start DLS 2.00 TFO -180.00									
5,000.00	26.13	82.00	4,589.78	250.43	1,781.89	-280.56	2.00	-2.00	0.00
5,100.00	24.13	82.00	4,680.31	256.34	1,823.95	-287.18	2.00	-2.00	0.00
5,200.00	22.13	82.00	4,772.26	261.81	1,862.85	-293.30	2.00	-2.00	0.00
5,300.00	20.13	82.00	4,865.53	266.82	1,898.55	-298.93	2.00	-2.00	0.00
5,400.00	18.13	82.00	4,960.00	271.39	1,931.01	-304.04	2.00	-2.00	0.00
5,500.00	16.13	82.00	5,055.56	275.48	1,960.18	-308.63	2.00	-2.00	0.00
5,600.00	14.13	82.00	5,152.09	279.12	1,986.03	-312.70	2.00	-2.00	0.00
5,700.00	12.13	82.00	5,249.47	282.28	2,008.53	-316.24	2.00	-2.00	0.00
5,800.00	10.13	82.00	5,347.58	284.97	2,027.65	-319.25	2.00	-2.00	0.00
5,900.00	8.13	82.00	5,446.31	287.18	2,043.37	-321.73	2.00	-2.00	0.00
6,000.00	6.13	82.00	5,545.53	288.90	2,055.66	-323.66	2.00	-2.00	0.00
6,100.00	4.13	82.00	5,645.12	290.15	2,064.52	-325.06	2.00	-2.00	0.00
6,200.00	2.13	82.00	5,744.97	290.91	2,069.94	-325.91	2.00	-2.00	0.00
6,300.00	0.13	82.00	5,844.94	291.19	2,071.89	-326.22	2.00	-2.00	0.00
6,306.67	0.00	0.00	5,851.61	291.19	2,071.90	-326.22	2.00	-2.00	-1,229.99
Start 465.77 hold at 6306.67 MD									
6,400.00	0.00	0.00	5,944.94	291.19	2,071.90	-326.22	0.00	0.00	0.00
6,500.00	0.00	0.00	6,044.94	291.19	2,071.90	-326.22	0.00	0.00	0.00
6,600.00	0.00	0.00	6,144.94	291.19	2,071.90	-326.22	0.00	0.00	0.00
6,700.00	0.00	0.00	6,244.94	291.19	2,071.90	-326.22	0.00	0.00	0.00
6,772.44	0.00	0.00	6,317.38	291.19	2,071.90	-326.22	0.00	0.00	0.00
KOP @ 6772.44ft									
6,800.00	2.48	182.43	6,344.93	290.59	2,071.88	-325.62	9.00	9.00	-644.24
6,900.00	11.48	182.43	6,444.09	278.46	2,071.36	-313.49	9.00	9.00	0.00
7,000.00	20.48	182.43	6,540.13	250.98	2,070.20	-285.99	9.00	9.00	0.00
7,100.00	29.48	182.43	6,630.68	208.83	2,068.41	-243.82	9.00	9.00	0.00
7,200.00	38.48	182.43	6,713.52	153.05	2,066.05	-188.00	9.00	9.00	0.00
7,300.00	47.48	182.43	6,786.60	85.00	2,063.17	-119.92	9.00	9.00	0.00
7,350.00	51.98	182.43	6,818.91	46.90	2,061.55	-81.79	9.00	9.00	0.00
DLS = 9°/100'									
7,400.00	56.48	182.43	6,848.13	6.38	2,059.84	-41.25	9.00	9.00	0.00
7,482.25	63.88	182.43	6,889.00	-64.87	2,056.82	30.04	9.00	9.00	0.00
Sharon Springs									
7,500.00	65.48	182.43	6,896.59	-80.90	2,056.14	46.08	9.00	9.00	0.00
7,593.44	73.89	182.43	6,929.00	-168.37	2,052.44	133.60	9.00	9.00	0.00
Niobrara									
7,600.00	74.48	182.43	6,930.79	-174.68	2,052.17	139.91	9.00	9.00	0.00
7,700.00	83.48	182.43	6,949.88	-272.65	2,048.02	237.94	9.00	9.00	0.00
7,773.05	90.06	182.43	6,954.00	-345.48	2,044.93	310.81	9.00	9.00	0.00
End Build @ 7773.05ft - Top of Production									
7,800.00	90.06	182.43	6,953.97	-372.40	2,043.79	337.75	0.00	0.00	0.00
7,900.00	90.06	182.43	6,953.88	-472.31	2,039.56	437.72	0.00	0.00	0.00
8,000.00	90.06	182.43	6,953.78	-572.22	2,035.33	537.68	0.00	0.00	0.00

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well GEORGE 25-7HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Site:	2N-65W-25 George 7-25HZ Pad	North Reference:	True
Well:	GEORGE 25-7HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,100.00	90.06	182.43	6,953.68	-672.13	2,031.10	637.65	0.00	0.00	0.00
8,200.00	90.06	182.43	6,953.59	-772.04	2,026.87	737.62	0.00	0.00	0.00
8,300.00	90.06	182.43	6,953.49	-871.95	2,022.63	837.59	0.00	0.00	0.00
8,400.00	90.06	182.43	6,953.40	-971.86	2,018.40	937.55	0.00	0.00	0.00
8,500.00	90.06	182.43	6,953.30	-1,071.77	2,014.17	1,037.52	0.00	0.00	0.00
8,600.00	90.06	182.43	6,953.20	-1,171.68	2,009.94	1,137.49	0.00	0.00	0.00
8,700.00	90.06	182.43	6,953.11	-1,271.59	2,005.71	1,237.46	0.00	0.00	0.00
8,800.00	90.06	182.43	6,953.01	-1,371.51	2,001.48	1,337.43	0.00	0.00	0.00
8,900.00	90.06	182.43	6,952.91	-1,471.42	1,997.24	1,437.39	0.00	0.00	0.00
9,000.00	90.06	182.43	6,952.82	-1,571.33	1,993.01	1,537.36	0.00	0.00	0.00
9,100.00	90.06	182.43	6,952.72	-1,671.24	1,988.78	1,637.33	0.00	0.00	0.00
9,200.00	90.06	182.43	6,952.62	-1,771.15	1,984.55	1,737.30	0.00	0.00	0.00
9,300.00	90.06	182.43	6,952.53	-1,871.06	1,980.32	1,837.26	0.00	0.00	0.00
9,400.00	90.06	182.43	6,952.43	-1,970.97	1,976.08	1,937.23	0.00	0.00	0.00
9,500.00	90.06	182.43	6,952.33	-2,070.88	1,971.85	2,037.20	0.00	0.00	0.00
9,600.00	90.06	182.43	6,952.24	-2,170.79	1,967.62	2,137.17	0.00	0.00	0.00
9,700.00	90.06	182.43	6,952.14	-2,270.70	1,963.39	2,237.13	0.00	0.00	0.00
9,800.00	90.06	182.43	6,952.05	-2,370.61	1,959.16	2,337.10	0.00	0.00	0.00
9,900.00	90.06	182.43	6,951.95	-2,470.52	1,954.93	2,437.07	0.00	0.00	0.00
10,000.00	90.06	182.43	6,951.85	-2,570.43	1,950.69	2,537.04	0.00	0.00	0.00
10,100.00	90.06	182.43	6,951.76	-2,670.34	1,946.46	2,637.01	0.00	0.00	0.00
10,200.00	90.06	182.43	6,951.66	-2,770.25	1,942.23	2,736.97	0.00	0.00	0.00
10,300.00	90.06	182.43	6,951.56	-2,870.16	1,938.00	2,836.94	0.00	0.00	0.00
10,400.00	90.06	182.43	6,951.47	-2,970.07	1,933.77	2,936.91	0.00	0.00	0.00
10,500.00	90.06	182.43	6,951.37	-3,069.98	1,929.53	3,036.88	0.00	0.00	0.00
10,521.36	90.06	182.43	6,951.35	-3,091.32	1,928.63	3,058.23	0.00	0.00	0.00
Begin Turn to BHL @ 10521.36ft									
10,600.00	90.06	180.85	6,951.27	-3,169.93	1,926.38	3,136.86	2.00	0.00	-2.00
10,639.46	90.06	180.06	6,951.24	-3,209.39	1,926.07	3,176.32	2.00	0.00	-2.00
End Turn @ 10639.46ft									
10,700.00	90.06	180.06	6,951.18	-3,269.93	1,926.00	3,236.85	0.00	0.00	0.00
10,800.00	90.06	180.06	6,951.08	-3,369.93	1,925.89	3,336.84	0.00	0.00	0.00
10,900.00	90.06	180.06	6,950.99	-3,469.93	1,925.78	3,436.83	0.00	0.00	0.00
11,000.00	90.06	180.06	6,950.89	-3,569.93	1,925.67	3,536.81	0.00	0.00	0.00
11,100.00	90.06	180.06	6,950.79	-3,669.93	1,925.56	3,636.80	0.00	0.00	0.00
11,200.00	90.06	180.06	6,950.70	-3,769.93	1,925.45	3,736.79	0.00	0.00	0.00
11,300.00	90.06	180.06	6,950.60	-3,869.93	1,925.33	3,836.78	0.00	0.00	0.00
11,400.00	90.06	180.06	6,950.51	-3,969.93	1,925.22	3,936.76	0.00	0.00	0.00
11,500.00	90.06	180.06	6,950.41	-4,069.93	1,925.11	4,036.75	0.00	0.00	0.00
11,600.00	90.06	180.06	6,950.31	-4,169.92	1,925.00	4,136.74	0.00	0.00	0.00
11,700.00	90.06	180.06	6,950.22	-4,269.92	1,924.89	4,236.73	0.00	0.00	0.00
11,800.00	90.06	180.06	6,950.12	-4,369.92	1,924.78	4,336.71	0.00	0.00	0.00
11,900.00	90.06	180.06	6,950.03	-4,469.92	1,924.67	4,436.70	0.00	0.00	0.00
12,000.00	90.06	180.06	6,949.93	-4,569.92	1,924.56	4,536.69	0.00	0.00	0.00
12,100.00	90.06	180.06	6,949.83	-4,669.92	1,924.45	4,636.68	0.00	0.00	0.00
12,200.00	90.06	180.06	6,949.74	-4,769.92	1,924.34	4,736.66	0.00	0.00	0.00
12,300.00	90.06	180.06	6,949.64	-4,869.92	1,924.23	4,836.65	0.00	0.00	0.00
12,400.00	90.06	180.06	6,949.55	-4,969.92	1,924.12	4,936.64	0.00	0.00	0.00
12,500.00	90.06	180.06	6,949.45	-5,069.92	1,924.01	5,036.63	0.00	0.00	0.00
12,600.00	90.06	180.06	6,949.35	-5,169.92	1,923.90	5,136.61	0.00	0.00	0.00
12,700.00	90.06	180.06	6,949.26	-5,269.92	1,923.79	5,236.60	0.00	0.00	0.00
12,800.00	90.06	180.06	6,949.16	-5,369.92	1,923.67	5,336.59	0.00	0.00	0.00
12,900.00	90.06	180.06	6,949.07	-5,469.92	1,923.56	5,436.58	0.00	0.00	0.00

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well GEORGE 25-7HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Site:	2N-65W-25 George 7-25HZ Pad	North Reference:	True
Well:	GEORGE 25-7HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,000.00	90.06	180.06	6,948.97	-5,569.92	1,923.45	5,536.56	0.00	0.00	0.00
13,100.00	90.06	180.06	6,948.87	-5,669.92	1,923.34	5,636.55	0.00	0.00	0.00
13,200.00	90.06	180.06	6,948.78	-5,769.92	1,923.23	5,736.54	0.00	0.00	0.00
13,300.00	90.06	180.06	6,948.68	-5,869.92	1,923.12	5,836.53	0.00	0.00	0.00
13,400.00	90.06	180.06	6,948.59	-5,969.92	1,923.01	5,936.51	0.00	0.00	0.00
13,500.00	90.06	180.06	6,948.49	-6,069.92	1,922.90	6,036.50	0.00	0.00	0.00
13,600.00	90.06	180.06	6,948.39	-6,169.92	1,922.79	6,136.49	0.00	0.00	0.00
13,700.00	90.06	180.06	6,948.30	-6,269.92	1,922.68	6,236.48	0.00	0.00	0.00
13,800.00	90.06	180.06	6,948.20	-6,369.92	1,922.57	6,336.46	0.00	0.00	0.00
13,900.00	90.06	180.06	6,948.11	-6,469.92	1,922.46	6,436.45	0.00	0.00	0.00
14,000.00	90.06	180.06	6,948.01	-6,569.92	1,922.35	6,536.44	0.00	0.00	0.00
14,100.00	90.06	180.06	6,947.91	-6,669.92	1,922.24	6,636.43	0.00	0.00	0.00
14,200.00	90.06	180.06	6,947.82	-6,769.92	1,922.13	6,736.41	0.00	0.00	0.00
14,300.00	90.06	180.06	6,947.72	-6,869.92	1,922.01	6,836.40	0.00	0.00	0.00
14,400.00	90.06	180.06	6,947.63	-6,969.92	1,921.90	6,936.39	0.00	0.00	0.00
14,500.00	90.06	180.06	6,947.53	-7,069.92	1,921.79	7,036.37	0.00	0.00	0.00
14,600.00	90.06	180.06	6,947.43	-7,169.92	1,921.68	7,136.36	0.00	0.00	0.00
14,700.00	90.06	180.06	6,947.34	-7,269.92	1,921.57	7,236.35	0.00	0.00	0.00
14,800.00	90.06	180.06	6,947.24	-7,369.92	1,921.46	7,336.34	0.00	0.00	0.00
14,900.00	90.06	180.06	6,947.15	-7,469.92	1,921.35	7,436.32	0.00	0.00	0.00
15,000.00	90.06	180.06	6,947.05	-7,569.92	1,921.24	7,536.31	0.00	0.00	0.00
15,100.00	90.06	180.06	6,946.95	-7,669.92	1,921.13	7,636.30	0.00	0.00	0.00
15,200.00	90.06	180.06	6,946.86	-7,769.92	1,921.02	7,736.29	0.00	0.00	0.00
15,300.00	90.06	180.06	6,946.76	-7,869.92	1,920.91	7,836.27	0.00	0.00	0.00
15,400.00	90.06	180.06	6,946.67	-7,969.92	1,920.80	7,936.26	0.00	0.00	0.00
15,500.00	90.06	180.06	6,946.57	-8,069.92	1,920.69	8,036.25	0.00	0.00	0.00
15,600.00	90.06	180.06	6,946.47	-8,169.92	1,920.58	8,136.24	0.00	0.00	0.00
15,700.00	90.06	180.06	6,946.38	-8,269.92	1,920.47	8,236.22	0.00	0.00	0.00
15,800.00	90.06	180.06	6,946.28	-8,369.92	1,920.36	8,336.21	0.00	0.00	0.00
15,900.00	90.06	180.06	6,946.19	-8,469.92	1,920.24	8,436.20	0.00	0.00	0.00
16,000.00	90.06	180.06	6,946.09	-8,569.92	1,920.13	8,536.19	0.00	0.00	0.00
16,093.74	90.06	180.06	6,946.00	-8,663.66	1,920.03	8,629.91	0.00	0.00	0.00
TD Well @ 16093.74ft									

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")	
1,523.46	1,500.00	9 5/8" Csg	9-5/8	13-1/2	
7,773.05	6,954.00	Top of Production	5-1/2	7-7/8	

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well GEORGE 25-7HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 4917.00usft (Drilling Rig)
Site:	2N-65W-25 George 7-25HZ Pad	North Reference:	True
Well:	GEORGE 25-7HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,385.66	1,369.00	Fox Hills				
4,292.05	3,964.00	Parkman				
4,805.11	4,417.00	Sussex				
7,482.25	6,889.00	Sharon Springs				
7,593.44	6,929.00	Niobrara				

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
250.00	250.00	0.00	0.00	Start Build 1.50	
2,116.67	2,043.25	62.23	442.76	Start 2790.00 hold at 2116.67 MD	
4,906.67	4,506.67	244.52	1,739.83	Start DLS 2.00 TFO -180.00	
6,306.67	5,851.61	291.19	2,071.90	Start 465.77 hold at 6306.67 MD	
6,772.44	6,317.38	291.19	2,071.90	KOP @ 6772.44ft	
7,350.00	6,818.91	46.90	2,061.55	DLS = 9°/100'	
7,773.05	6,954.00	-345.48	2,044.93	End Build @ 7773.05ft	
10,521.36	6,951.35	-3,091.32	1,928.63	Begin Turn to BHL @ 10521.36ft	
10,639.46	6,951.24	-3,209.39	1,926.07	End Turn @ 10639.46ft	
16,093.74	6,946.00	-8,663.66	1,920.03	TD Well @ 16093.74ft	