


COLORADO OIL AND GAS CONSERVATION COMMISSION
SUNDRY NOTICES AND REPORTS OF WELLS

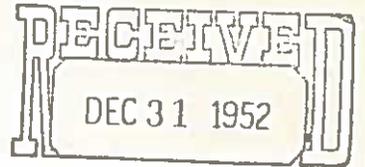

OIL & GAS
CONSERVATION COMMISSION

(Indicate nature of data by checking below)

- Notice of intention to drill _____
- Notice of intention to change plans _____
- Notice of date for test of water shut-off _____
- Report on result of test of water shut-off _____
- Notice of intention to re-drill or repair well _____
- Notice of intention to clean out well _____
- Statement of shooting _____
- Statement of perforating _____
- Notice to pull or otherwise alter casing _____
- Notice of intention to abandon well _____
- Report of work done on well since previous report X

Following is a (~~notice of intention to do work~~) December 29 19 52
(report of work done) (~~on-land~~) (patented) described as follows:

Colorado	Logan	Luft
State	County	Field
<u>3</u>	<u>G. Morris</u>	<u>NW/4 20</u>
(Well No.)	(Lease)	(Sec. and $\frac{1}{4}$ Sec.)
		<u>8N</u>
		(Twp.)
		<u>53W</u>
		(Range)
		<u>---</u>
		(Meridian)

The well is located 330 ft. (N) of N Line and 995 ft. (E) of
W Line of NW/4 Section 20-8N-53W (S) (W)

The elevation above sea level is 4187 ft.

Details of Plan of Work: (State names of and expected depths to objective sands; Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

- 12/14/52 Spudded
 - 12/15/52 Ran and cemented 8 5/8" casing at 613 feet with 300 sacks
 - 12/22/52 Drill stem test No. 1 4858-64 Open 1 hr. Recovered 730 feet water with rainbow show of oil, trace of gas. IFPO. FFP 325. SI 30 min 1160. Hydr 2750. Ran Schlumberger. Prepare to plug and abandon. A cement plug was spotted from 4864 feet (total depth) to 4850 feet opposite the 'Muddy' sandstone. Heavy mud taken from the pit was then placed from 4850 feet to 625 feet (15 feet below bottom of surface casing). A cement plug was then spotted to 595 feet with heavy mud being placed to 15 feet. A cement plug being spotted from 15 feet to the surface in such a manner as not to interfere with surface cultivation. Plug and Abandon. Complete.
- Schlumberger Tops.
- | | |
|-----------|------|
| Niobrara | 3977 |
| Timpas | 4335 |
| Bentonite | 4766 |
| Muddy | 4858 |

Approved: _____ Company Shell Oil Company

J. J. [Signature] Director att Address 413 Denham Bldg. Denver, Colo.

By _____ Title Division Production Manager