

# SRC ENERGY


Location: COLORADO Slot: SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)  
Field: WELD COUNTY (NAD83,TRUE NORTH) Well: BEEBE 23C-26-M  
Facility: SEC.34-T06N-R66W Wellbore: BEEBE 23C-26-M PWB



SRC ENERGY



Plot reference wellpath is BEEBE 23C-26-M REV-B.0 PWP	Grid System: NAD83 / Lambert Colorado SP, Northern Zone (501), US feet
True vertical depths are referenced to PRECISION 462 (20') (RKB)	* = Wellpath was transformed from a different geodetic datum
Measured depths are referenced to PRECISION 462 (20') (RKB)	North Reference: True north
PRECISION 462 (20') (RKB) to Mean Sea Level: 4722 feet	Scale: True distance
Mean Sea Level to Mud line (At Slot: SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)): 0 feet	Depths are in feet
Coordinates are in feet referenced to Slot	Created by: cantrayt on 2017-07-12
	Database: Denver

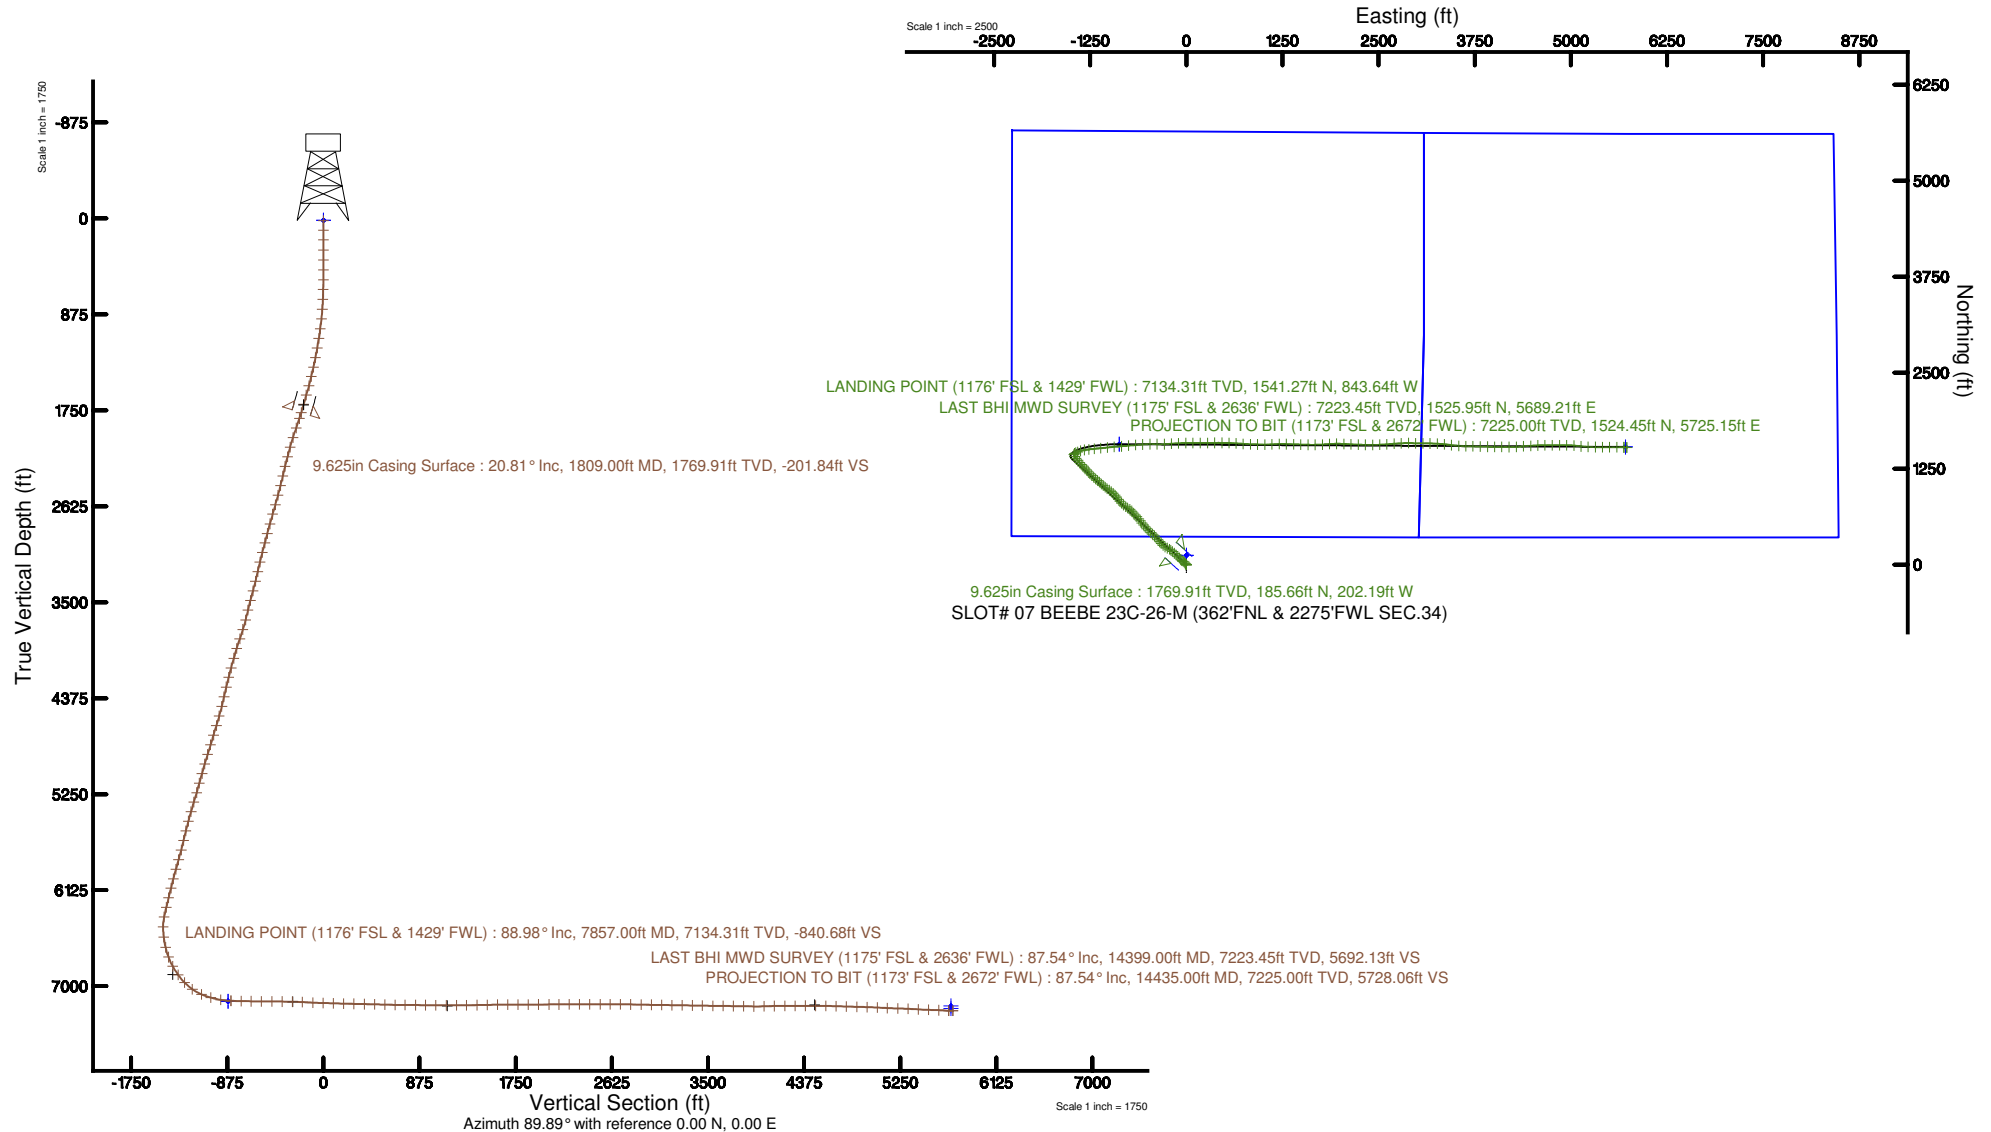



# Actual Wellpath Report

BEEBE 23C-26-M AWP

Page n of nn



## REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWB
Facility	SEC.34-T06N-R66W		

## REPORT SETUP INFORMATION

Projection System	NAD83 / Lambert Colorado SP, Northern Zone (501), US feet	Software System	WellArchitect® 5.0
North Reference	True	User	Cantryat
Scale	0.999963	Report Generated	7/12/2017 at 11:29:38 AM
Convergence at slot	0.48° East	Database/Source file	Denver/BEEBE_23C-26-M_AWP.xml

## WELLPATH LOCATION

	Local coordinates		Grid coordinates		Geographic coordinates	
	North[ft]	East[ft]	Easting[US ft]	Northing[US ft]	Latitude	Longitude
Slot Location	-119.92	-0.85	3204488.37	1408055.68	40°27'04.280"N	104°45'54.774"W
Facility Reference Pt			3204488.23	1408175.60	40°27'05.465"N	104°45'54.763"W
Field Reference Pt			3171284.48	1426358.81	40°30'07.643"N	104°53'02.634"W

## WELLPATH DATUM

Calculation method	Minimum curvature	PRECISION 462 (20') (RKB) to Facility Vertical Datum	4722.00ft
Horizontal Reference Pt	Slot	PRECISION 462 (20') (RKB) to Mean Sea Level	4722.00ft
Vertical Reference Pt	PRECISION 462 (20') (RKB)	PRECISION 462 (20') (RKB) to Mud Line at Slot (SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34))	4722.00ft
MD Reference Pt	PRECISION 462 (20') (RKB)	Section Origin	N 0.00, E 0.00 ft
Field Vertical Reference	Mean Sea Level	Section Azimuth	89.89°



# Actual Wellpath Report

BEEBE 23C-26-M AWP

Page n of nn



## REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWB
Facility	SEC.34-T06N-R66W		

## WELLPATH DATA (157 stations) † = interpolated/extrapolated station

MD (ft)	Inclination [°]	Azimuth [°]	TVD (ft)	Vert Sect (ft)	North (ft)	East (ft)	DLS (°/100ft)	Comments
0.00†	0.000	155.470	0.00	0.00	0.00	0.00	0.00	
20.00	0.000	155.470	20.00	0.00	0.00	0.00	0.00	
108.00	0.540	155.470	108.00	0.17	-0.38	0.17	0.61	
195.00	0.600	157.010	194.99	0.52	-1.17	0.52	0.07	
287.00	0.480	160.660	286.99	0.83	-1.98	0.84	0.14	
378.00	0.180	186.250	377.99	0.94	-2.48	0.95	0.36	
468.00	0.240	279.110	467.99	0.74	-2.59	0.75	0.34	
558.00	0.950	307.530	557.98	-0.04	-2.10	-0.03	0.83	
648.00	2.280	321.720	647.95	-1.73	-0.24	-1.73	1.53	
738.00	4.240	321.340	737.80	-4.91	3.76	-4.92	2.18	
828.00	6.690	324.030	827.38	-10.06	10.60	-10.08	2.74	
918.00	8.750	313.370	916.56	-18.10	19.55	-18.14	2.78	
1008.00	10.610	315.010	1005.28	-28.91	30.11	-28.97	2.09	
1098.00	11.520	308.180	1093.61	-41.81	41.52	-41.89	1.77	
1188.00	12.710	309.870	1181.60	-56.46	53.43	-56.56	1.38	
1278.00	15.050	312.220	1268.97	-72.68	67.63	-72.81	2.67	
1368.00	17.140	314.500	1355.44	-90.76	84.78	-90.93	2.43	
1458.00	18.250	314.450	1441.18	-110.25	103.94	-110.45	1.23	
1548.00	20.470	311.560	1526.09	-132.05	124.25	-132.29	2.69	
1638.00	21.220	313.070	1610.20	-155.68	145.82	-155.96	1.03	
1728.00	20.850	311.950	1694.20	-179.45	167.65	-179.77	0.61	
1867.00	20.920	301.070	1824.11	-219.06	197.00	-219.44	2.79	
1959.00	20.960	297.920	1910.04	-247.64	213.18	-248.05	1.22	
2053.00	20.690	299.720	1997.90	-276.88	229.29	-277.33	0.74	
2146.00	20.610	313.340	2084.98	-303.04	248.68	-303.51	5.15	
2240.00	20.700	315.940	2172.94	-326.58	271.97	-327.10	0.98	
2333.00	20.720	319.870	2259.93	-348.56	296.36	-349.13	1.49	
2427.00	20.620	321.130	2347.88	-369.62	321.96	-370.24	0.48	
2521.00	20.920	319.280	2435.77	-390.91	347.57	-391.57	0.77	
2615.00	20.710	315.220	2523.64	-413.52	372.09	-414.23	1.55	



# Actual Wellpath Report

BEEBE 23C-26-M AWP

Page n of nn



## REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWB
Facility	SEC.34-T06N-R66W		

## WELLPATH DATA (157 stations)

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	DLS [°/100ft]	Comments
2707.00	20.810	311.200	2609.67	-437.23	394.40	-437.99	1.55	
2800.00	20.800	311.770	2696.61	-461.93	416.28	-462.73	0.22	
2894.00	21.430	313.140	2784.30	-486.87	439.14	-487.71	0.85	
2988.00	21.160	317.170	2871.89	-510.89	463.33	-511.78	1.58	
3081.00	21.500	318.820	2958.52	-533.47	488.46	-534.41	0.74	
3175.00	21.480	318.100	3045.98	-556.26	514.24	-557.24	0.28	
3269.00	21.390	324.130	3133.49	-577.75	540.94	-578.78	2.35	
3362.00	21.420	323.780	3220.08	-597.66	568.39	-598.76	0.14	
3456.00	21.500	320.910	3307.56	-618.62	595.60	-619.76	1.12	
3551.00	21.610	317.260	3395.92	-641.42	621.97	-642.61	1.42	
3645.00	20.590	314.480	3483.62	-664.91	646.26	-666.15	1.52	
3739.00	20.310	321.580	3571.71	-686.80	670.63	-688.09	2.65	
3834.00	21.090	318.380	3660.58	-708.35	696.32	-709.69	1.45	
3927.00	21.060	304.280	3747.41	-733.24	718.26	-734.62	5.44	
4020.00	20.810	300.240	3834.28	-761.29	735.99	-762.70	1.57	
4112.00	20.970	305.970	3920.24	-788.70	753.89	-790.15	2.23	
4208.00	20.760	310.430	4009.95	-815.51	775.02	-817.00	1.67	
4302.00	20.680	315.100	4097.88	-839.87	797.58	-841.40	1.76	
4395.00	21.060	318.750	4184.78	-862.43	821.77	-864.01	1.46	
4489.00	21.210	322.830	4272.46	-883.79	848.02	-885.42	1.57	
4585.00	21.050	324.090	4362.01	-904.34	875.83	-906.03	0.50	
4678.00	20.910	319.220	4448.85	-924.93	901.92	-926.66	1.88	
4772.00	20.840	311.720	4536.69	-948.33	925.76	-950.11	2.84	
4866.00	20.880	307.750	4624.54	-974.01	947.14	-975.83	1.50	
4959.00	20.990	307.750	4711.40	-1000.25	967.48	-1002.11	0.12	
5052.00	20.950	305.060	4798.24	-1026.99	987.23	-1028.89	1.04	
5146.00	20.780	307.270	4886.08	-1053.98	1006.98	-1055.91	0.86	
5240.00	21.070	310.610	4973.88	-1080.04	1028.08	-1082.01	1.31	
5333.00	20.730	311.660	5060.76	-1104.98	1049.90	-1107.00	0.54	
5427.00	20.670	313.040	5148.69	-1129.49	1072.28	-1131.55	0.52	



# Actual Wellpath Report

BEEBE 23C-26-M AWP

Page n of nn



## REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWB
Facility	SEC.34-T06N-R66W		

## WELLPATH DATA (157 stations)

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	DLS [°/100ft]	Comments
5520.00	21.010	311.520	5235.61	-1153.93	1094.54	-1156.03	0.69	
5612.00	20.920	309.060	5321.52	-1178.99	1115.82	-1181.14	0.96	
5705.00	20.750	310.680	5408.44	-1204.34	1137.02	-1206.52	0.65	
5798.00	20.910	314.950	5495.37	-1228.53	1159.49	-1230.76	1.64	
5893.00	20.370	317.580	5584.27	-1251.64	1183.67	-1253.91	1.13	
5987.00	20.840	321.890	5672.26	-1272.95	1208.91	-1275.27	1.69	
6079.00	20.810	317.190	5758.26	-1294.11	1233.77	-1296.48	1.82	
6175.00	20.920	313.420	5847.97	-1318.10	1258.06	-1320.52	1.40	
6267.00	21.140	312.120	5933.84	-1342.29	1280.48	-1344.75	0.56	
6361.00	21.130	318.760	6021.53	-1365.99	1304.59	-1368.50	2.55	
6453.00	21.210	320.630	6107.32	-1387.43	1329.93	-1389.98	0.74	
6546.00	21.080	320.510	6194.06	-1408.69	1355.84	-1411.29	0.15	
6640.00	21.140	321.510	6281.75	-1429.94	1382.15	-1432.59	0.39	
6734.00	20.100	325.270	6369.73	-1449.64	1408.70	-1452.35	1.79	
6828.00	12.620	1.460	6460.08	-1458.57	1432.33	-1461.32	13.10	
6923.00	8.160	55.870	6553.70	-1452.68	1446.52	-1455.46	10.80	
7018.00	13.930	67.790	6646.92	-1436.48	1454.64	-1439.28	6.50	
7111.00	22.470	67.350	6735.18	-1409.64	1465.73	-1412.46	9.18	
7205.00	29.940	71.620	6819.47	-1370.72	1480.07	-1373.56	8.19	
7297.00	35.710	79.600	6896.78	-1322.44	1492.17	-1325.30	7.83	
7390.00	44.260	84.810	6968.00	-1263.28	1500.02	-1266.16	9.87	
7483.00	55.600	84.400	7027.76	-1192.53	1506.72	-1195.43	12.20	
7578.00	65.740	83.840	7074.24	-1110.24	1515.22	-1113.15	10.69	
7670.00	74.960	84.220	7105.14	-1024.14	1524.21	-1027.07	10.03	
7763.00	80.000	84.410	7125.30	-933.81	1533.20	-936.76	5.42	
7857.00	88.980	85.670	7134.31	-840.68	1541.27	-843.64	9.65	LANDING POINT (1176' FSL & 1429' FWL)
7949.00	88.950	84.790	7135.98	-749.00	1548.92	-751.97	0.96	
8041.00	88.280	85.900	7138.20	-657.32	1556.39	-660.31	1.41	
8135.00	89.880	85.470	7139.71	-563.58	1563.46	-566.59	1.76	
8229.00	89.540	89.250	7140.18	-469.69	1567.79	-472.71	4.04	



# Actual Wellpath Report

BEEBE 23C-26-M AWP

Page n of nn



## REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWP
Facility	SEC.34-T06N-R66W		

## WELLPATH DATA (157 stations)

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	DLS [°/100ft]	Comments
8322.00	89.720	91.420	7140.78	-376.71	1567.24	-379.71	2.34	
8415.00	88.550	88.380	7142.19	-283.73	1567.41	-286.74	3.50	
8508.00	86.980	85.490	7145.82	-190.94	1572.37	-193.95	3.53	
8602.00	87.450	86.570	7150.38	-97.26	1578.87	-100.29	1.25	
8696.00	88.340	89.260	7153.84	-3.39	1582.29	-6.43	3.01	
8789.00	88.400	90.310	7156.48	89.57	1582.64	86.53	1.13	
8883.00	88.460	89.930	7159.06	183.53	1582.44	180.50	0.41	
8977.00	88.520	89.310	7161.54	277.50	1583.06	274.46	0.66	
9072.00	88.650	89.490	7163.88	372.47	1584.06	369.43	0.23	
9165.00	88.520	90.500	7166.18	465.44	1584.07	462.40	1.09	
9258.00	88.650	92.350	7168.47	558.37	1581.75	555.34	1.99	
9351.00	88.550	93.760	7170.75	651.20	1576.80	648.17	1.52	
9443.00	89.540	93.670	7172.28	742.98	1570.84	739.97	1.08	
9538.00	89.820	91.360	7172.81	837.87	1566.67	834.87	2.45	
9630.00	89.660	92.360	7173.23	929.82	1563.69	926.82	1.10	
9724.00	89.750	89.610	7173.71	1023.79	1562.07	1020.79	2.93	
9818.00	89.630	87.010	7174.22	1117.75	1564.84	1114.74	2.77	
9911.00	90.250	88.840	7174.32	1210.69	1568.21	1207.68	2.08	
10003.00	90.250	91.620	7173.92	1302.67	1567.84	1299.67	3.02	
10098.00	91.260	91.460	7172.67	1397.63	1565.29	1394.62	1.08	
10191.00	91.170	92.070	7170.69	1490.55	1562.42	1487.56	0.66	
10285.00	90.400	91.340	7169.41	1584.50	1559.63	1581.51	1.13	
10379.00	90.490	89.060	7168.68	1678.49	1559.30	1675.50	2.43	
10473.00	90.280	86.770	7168.04	1772.42	1562.72	1769.43	2.45	
10566.00	90.340	85.820	7167.54	1865.24	1568.73	1862.23	1.02	
10659.00	90.060	89.910	7167.22	1958.16	1572.19	1955.14	4.41	
10753.00	90.120	93.100	7167.07	2052.11	1569.72	2049.10	3.39	
10846.00	90.180	92.950	7166.82	2144.97	1564.81	2141.97	0.17	
10939.00	90.150	91.920	7166.56	2237.88	1560.86	2234.88	1.11	
11032.00	90.060	90.800	7166.39	2330.84	1558.66	2327.86	1.21	



# Actual Wellpath Report

BEEBE 23C-26-M AWP

Page n of nn



## REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWP
Facility	SEC.34-T06N-R66W		

## WELLPATH DATA (157 stations)

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	DLS [°/100ft]	Comments
11126.00	90.000	90.300	7166.34	2424.84	1557.75	2421.85	0.54	
11220.00	90.060	87.120	7166.29	2518.81	1559.87	2515.82	3.38	
11312.00	90.090	85.860	7166.17	2610.64	1565.50	2607.64	1.37	
11405.00	89.970	85.500	7166.12	2703.39	1572.51	2700.38	0.41	
11499.00	89.140	86.660	7166.85	2797.18	1578.93	2794.15	1.52	
11594.00	88.860	90.340	7168.51	2892.12	1581.42	2889.09	3.88	
11687.00	89.020	92.760	7170.23	2985.06	1578.90	2982.03	2.61	
11781.00	89.010	90.150	7171.84	3079.00	1576.52	3075.98	2.78	
11874.00	89.140	90.090	7173.35	3171.99	1576.32	3168.97	0.15	
11967.00	89.140	93.030	7174.74	3264.93	1573.79	3261.91	3.16	
12060.00	89.080	96.810	7176.19	3357.54	1565.82	3354.54	4.06	
12153.00	88.980	97.180	7177.76	3449.81	1554.49	3446.83	0.41	
12248.00	89.170	93.190	7179.30	3544.38	1545.91	3541.41	4.20	
12342.00	89.170	91.850	7180.66	3638.26	1541.78	3635.31	1.43	
12434.00	89.140	91.600	7182.01	3730.21	1539.01	3727.26	0.27	
12529.00	89.080	91.510	7183.49	3825.16	1536.43	3822.21	0.11	
12622.00	89.260	91.150	7184.84	3918.12	1534.27	3915.18	0.43	
12716.00	91.790	90.880	7183.98	4012.09	1532.61	4009.15	2.71	
12808.00	91.480	90.890	7181.35	4104.04	1531.19	4101.10	0.34	
12903.00	90.520	90.340	7179.69	4199.01	1530.17	4196.08	1.16	
12997.00	90.090	86.710	7179.19	4292.97	1532.59	4290.03	3.89	
13091.00	90.120	85.430	7179.02	4386.76	1539.03	4383.81	1.36	
13185.00	89.970	86.510	7178.95	4480.54	1545.64	4477.58	1.16	
13277.00	88.430	86.490	7180.23	4572.36	1551.25	4569.39	1.67	
13370.00	88.400	90.870	7182.80	4665.28	1553.39	4662.31	4.71	
13465.00	88.340	90.770	7185.51	4760.23	1552.04	4757.26	0.12	
13559.00	88.490	88.640	7188.11	4854.19	1552.52	4851.22	2.27	
13653.00	87.940	89.480	7191.03	4948.13	1554.06	4945.16	1.07	
13747.00	86.950	96.140	7195.23	5041.87	1549.46	5038.90	7.16	
13839.00	86.890	97.560	7200.17	5133.05	1538.51	5130.11	1.54	



# Actual Wellpath Report

BEEBE 23C-26-M AWP

Page n of nn



## REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWP
Facility	SEC.34-T06N-R66W		

## WELLPATH DATA (157 stations)

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	DLS [°/100ft]	Comments
13934.00	88.980	90.680	7203.60	5227.67	1531.69	5224.74	7.56	
14027.00	86.980	91.790	7206.88	5320.58	1529.69	5317.65	2.46	
14121.00	86.800	91.090	7211.98	5414.41	1527.33	5411.49	0.77	
14213.00	88.220	89.290	7215.98	5506.31	1527.03	5503.39	2.49	
14307.00	87.510	89.840	7219.48	5600.25	1527.74	5597.32	0.96	
14399.00	87.540	92.390	7223.45	5692.13	1525.95	5689.21	2.77	LAST BHI MWD SURVEY (1175' FSL & 2636' FWL)
14435.00	87.540	92.390	7225.00	5728.06	1524.45	5725.15	0.00	PROJECTION TO BIT (1173' FSL & 2672' FWL)

## HOLE & CASING SECTIONS - Ref Wellbore: BEEBE 23C-26-M AWP Ref Wellpath: BEEBE 23C-26-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	20.00	1802.00	1782.00	20.00	1763.37	0.00	0.00	184.20	-200.18
9.625in Casing Surface	20.00	1809.00	1789.00	20.00	1769.91	0.00	0.00	185.66	-202.19
8.5in Open Hole	1802.00	14435.00	12633.00	1763.37	7225.00	184.20	-200.18	1524.45	5725.15





# Actual Wellpath Report

BEEBE 23C-26-M AWP

Page n of nn



## REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWB
Facility	SEC.34-T06N-R66W		

## TARGETS

Name	TVD [ft]	North [ft]	East [ft]	Grid East [US ft]	Grid North [US ft]	Latitude	Longitude	Shape
SEC.26-T06N-R66W	16.00	119.92	0.85	3204488.23	1408175.60	40°27'05.465"N	104°45'54.763"W	polygon
SEC.27-T06N-R66W	16.00	119.92	0.85	3204488.23	1408175.60	40°27'05.465"N	104°45'54.763"W	polygon
BEEBE 23C-26-M TOP OF PROD REV-1 (1201'FSL & 1402'FWL SEC.27)	7138.00	1566.27	-870.21	3203605.25	1409614.62	40°27'19.757"N	104°46'06.031"W	point
BEEBE 23C-26-M TOP OF PROD REV-2 (1201'FSL & 1402'FWL SEC.27)	7138.46	1566.27	-870.21	3203605.25	1409614.62	40°27'19.757"N	104°46'06.031"W	point
BEEBE 23C-26-M BHL REV-1 (1180'FSL & 2656'FWL SEC.26)	7180.00	1531.19	5708.89	3210184.15	1409634.06	40°27'19.404"N	104°44'40.924"W	point
BEEBE 23C-26-M BHL REV-2 (1180'FSL & 2656'FWL SEC.26)	7203.95	1531.19	5708.89	3210184.15	1409634.06	40°27'19.404"N	104°44'40.924"W	point

## WELLPATH COMPOSITION - Ref Wellbore: BEEBE 23C-26-M AWB Ref Wellpath: BEEBE 23C-26-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
20.00	1728.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM (STD ROTATING, AXIAL, ROCKIES GT)<108-1728>	BEEBE 23C-26-M AWB
1728.00	14399.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1867-14399>	BEEBE 23C-26-M AWB
14399.00	14435.00	Blind Drilling (std)	Projection to bit	BEEBE 23C-26-M AWB



# Actual Wellpath Report

BEEEBE 23C-26-M AWP  
Page n of nn

**REFERENCE WELLPATH IDENTIFICATION**

Operator	SRC ENERGY	Slot	SLOT# 07 BEEBE 23C-26-M (362'FNL & 2275'FWL SEC.34)
Area	COLORADO	Well	BEEBE 23C-26-M
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	BEEBE 23C-26-M AWB
Facility	SEC.34-T06N-R66W		

**WELLPATH COMMENTS**

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Comment
7857.00	88.980	85.670	7134.31	LANDING POINT (1176' FSL & 1429' FWL)
14399.00	87.540	92.390	7223.45	LAST BHI MWD SURVEY (1175' FSL & 2636' FWL)
14435.00	87.540	92.390	7225.00	PROJECTION TO BIT (1173' FSL & 2672' FWL)