

ConocoPhillips RBU Gold Data

Niobrara North Zone

King

King 3-65 28-29 3CH

King 3-65 28-29 3CH

Plan: Design C

Standard Planning Report

27 April, 2018



ConocoPhillips

King 3-65 28-29 3CH

Design C

Casing Depths



TVD	MD	Name	Size
2139.00	2139.00	9-5/8" Casing	9-5/8
7932.00	17895.65	5-1/2" Casing	5-1/2

Ground Level: 5584.40
Surface Location Latitude: 39° 45' 31.550 N
Surface Location Longitude: 104° 39' 39.580 W
North Reference: True
25' RKB @ 5609.40ft (25' RKB)

North American Datum 1983
GRS 1980
US State Plane 1983
Colorado Northern Zone

Well Profile Data

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	Vsect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5416.00	0.00	0.00	5416.00	0.00	0.00	0.00	0.00
7092.88	25.15	66.76	7039.53	142.91	332.82	1.50	-327.57
7119.02	25.15	66.76	7063.20	147.30	343.03	0.00	-337.62
8243.34	89.49	270.31	7846.00	295.49	-178.84	10.00	189.15
17895.65	89.49	270.31	7932.00	347.01	-9830.64	0.00	9836.76

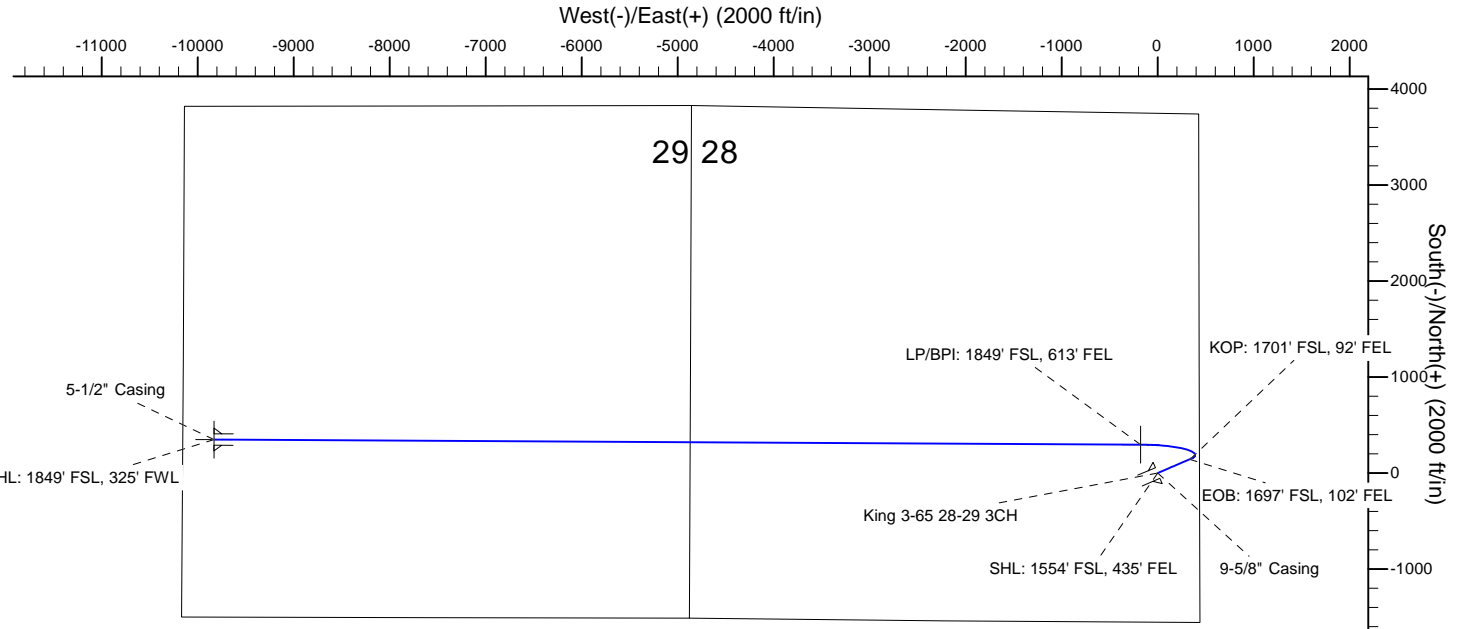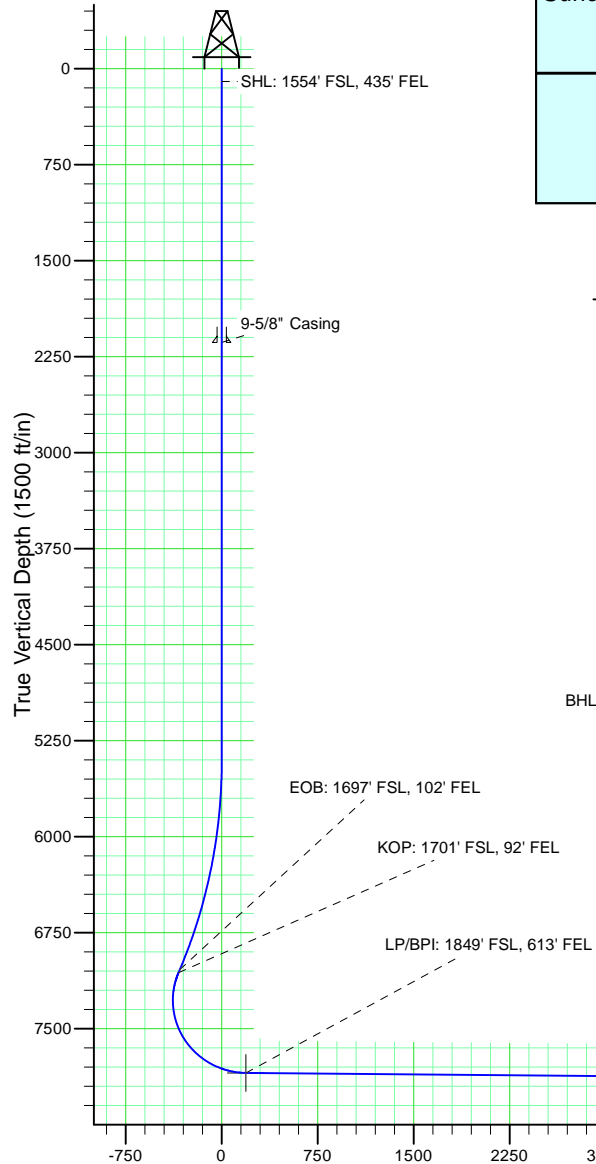

Wellbore Targets

Name	TVD	Latitude	Longitude
King 3-65 28-29 3CH BPI	7846.00	39° 45' 34.470 N	104° 39' 41.870 W
King 3-65 28-29 3CH BHL	7932.00	39° 45' 34.960 N	104° 41' 45.460 W

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well King 3-65 28-29 3CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5609.40ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5609.40ft (25' RKB)
Site:	King	North Reference:	True
Well:	King 3-65 28-29 3CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	King 3-65 28-29 3CH		
Design:	Design C		

Project	Niobrara North Zone, Colorado North Zone, FIPS Zone: 0501		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		Using geodetic scale factor

Site	King				
Site Position:		Northing:	1,156,151.749 usft	Latitude:	39° 45' 32.180 N
From:	Lat/Long	Easting:	3,235,927.874 usft	Longitude:	104° 39' 38.938 W
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "	Grid Convergence:	0.54 °

Well	King 3-65 28-29 3CH					
Well Position	+N-S	-63.81 ft	Northing:	1,156,087.469 usft	Latitude:	39° 45' 31.550 N
	+E-W	-50.14 ft	Easting:	3,235,878.342 usft	Longitude:	104° 39' 39.580 W
Position Uncertainty		0.00 ft	Wellhead Elevation:	5,584.40 ft	Ground Level:	5,584.40 ft

Wellbore	King 3-65 28-29 3CH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2017	12/1/2018	8.16	66.34	51,879.12194221

Design	Design C				
Audit Notes:					
Version:	0	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N-S (ft)	+E-W (ft)	Direction (°)	
	0.00	0.00	0.00	272.02	

Plan Survey Tool Program	Date	4/27/2018			
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	2,139.00	Design C (King 3-65 28-29 3CH)	Gyro-BM-MS	
				Gyro - bat/mem drop m/s	
2	2,139.00	5,416.00	Design C (King 3-65 28-29 3CH)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	
3	5,416.00	7,092.88	Design C (King 3-65 28-29 3CH)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	
4	7,092.88	7,119.02	Design C (King 3-65 28-29 3CH)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	
5	7,119.02	8,243.34	Design C (King 3-65 28-29 3CH)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	
6	8,243.34	17,895.65	Design C (King 3-65 28-29 3CH)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well King 3-65 28-29 3CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5609.40ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5609.40ft (25' RKB)
Site:	King	North Reference:	True
Well:	King 3-65 28-29 3CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	King 3-65 28-29 3CH		
Design:	Design C		

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,416.00	0.00	0.00	5,416.00	0.00	0.00	0.00	0.00	0.00	0.00	
7,092.88	25.15	66.76	7,039.53	142.91	332.82	1.50	1.50	0.00	66.76	
7,119.02	25.15	66.76	7,063.20	147.30	343.03	0.00	0.00	0.00	0.00	
8,243.34	89.49	270.31	7,846.00	295.49	-178.84	10.00	5.72	-13.92	-154.40	King 3-65 28-29 3C
17,895.65	89.49	270.31	7,932.00	347.01	-9,830.64	0.00	0.00	0.00	0.00	King 3-65 28-29 3C

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well King 3-65 28-29 3CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5609.40ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5609.40ft (25' RKB)
Site:	King	North Reference:	True
Well:	King 3-65 28-29 3CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	King 3-65 28-29 3CH		
Design:	Design C		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL: 1554' FSL, 435' FEL									
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,697.00	0.00	0.00	1,697.00	0.00	0.00	0.00	0.00	0.00	0.00
Fox Hills Top									
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,939.00	0.00	0.00	1,939.00	0.00	0.00	0.00	0.00	0.00	0.00
Pierre Top - Fox Hills Base									
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,139.00	0.00	0.00	2,139.00	0.00	0.00	0.00	0.00	0.00	0.00
Surface Casing - 9-5/8" Casing									
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well King 3-65 28-29 3CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5609.40ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5609.40ft (25' RKB)
Site:	King	North Reference:	True
Well:	King 3-65 28-29 3CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	King 3-65 28-29 3CH		
Design:	Design C		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,416.00	0.00	0.00	5,416.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	1.26	66.76	5,499.99	0.36	0.85	-0.84	1.50	1.50	0.00
5,600.00	2.76	66.76	5,599.93	1.75	4.07	-4.01	1.50	1.50	0.00
5,700.00	4.26	66.76	5,699.74	4.16	9.70	-9.54	1.50	1.50	0.00
5,800.00	5.76	66.76	5,799.35	7.61	17.72	-17.44	1.50	1.50	0.00
5,900.00	7.26	66.76	5,898.71	12.08	28.14	-27.69	1.50	1.50	0.00
6,000.00	8.76	66.76	5,997.73	17.58	40.94	-40.30	1.50	1.50	0.00
6,100.00	10.26	66.76	6,096.35	24.10	56.12	-55.24	1.50	1.50	0.00
6,200.00	11.76	66.76	6,194.51	31.63	73.67	-72.51	1.50	1.50	0.00
6,300.00	13.26	66.76	6,292.13	40.18	93.57	-92.10	1.50	1.50	0.00
6,400.00	14.76	66.76	6,389.15	49.73	115.82	-113.99	1.50	1.50	0.00
6,500.00	16.26	66.76	6,485.51	60.28	140.39	-138.18	1.50	1.50	0.00
6,600.00	17.76	66.76	6,581.13	71.83	167.27	-164.63	1.50	1.50	0.00
6,700.00	19.26	66.76	6,675.96	84.35	196.44	-193.34	1.50	1.50	0.00
6,800.00	20.76	66.76	6,769.92	97.85	227.88	-224.29	1.50	1.50	0.00
6,900.00	22.26	66.76	6,862.95	112.32	261.57	-257.45	1.50	1.50	0.00
7,000.00	23.76	66.76	6,954.99	127.74	297.49	-292.80	1.50	1.50	0.00
7,092.88	25.15	66.76	7,039.53	142.91	332.82	-327.57	1.50	1.50	0.00
EOB: 1697' FSL, 102' FEL									
7,100.00	25.15	66.76	7,045.98	144.11	335.60	-330.31	0.00	0.00	0.00
7,119.02	25.15	66.76	7,063.19	147.30	343.03	-337.62	0.00	0.00	0.00
KOP: 1701' FSL, 92' FEL									
7,150.00	22.40	63.25	7,091.54	152.55	354.35	-348.75	10.00	-8.90	-11.34
7,200.00	18.17	55.50	7,138.44	161.26	369.29	-363.37	10.00	-8.46	-15.49
7,250.00	14.42	43.61	7,186.44	170.19	380.02	-373.78	10.00	-7.49	-23.79
7,300.00	11.63	25.02	7,235.17	179.27	386.45	-379.88	10.00	-5.58	-37.18
7,350.00	10.59	359.41	7,284.26	188.44	388.53	-381.65	10.00	-2.09	-51.22
7,400.00	11.76	334.09	7,333.34	197.62	386.26	-379.05	10.00	2.34	-50.65
7,450.00	14.62	315.95	7,382.04	206.74	379.64	-372.11	10.00	5.73	-36.27
7,500.00	18.41	304.37	7,429.98	215.74	368.73	-360.89	10.00	7.57	-23.17
7,550.00	22.66	296.81	7,476.80	224.54	353.61	-345.47	10.00	8.50	-15.13
7,600.00	27.15	291.58	7,522.15	233.09	334.39	-325.96	10.00	8.99	-10.45
7,650.00	31.79	287.76	7,565.67	241.31	311.23	-302.52	10.00	9.27	-7.64
7,700.00	36.51	284.83	7,607.04	249.13	284.29	-275.33	10.00	9.45	-5.86
7,750.00	41.29	282.50	7,645.94	256.52	253.79	-244.58	10.00	9.56	-4.67
7,800.00	46.11	280.57	7,682.08	263.39	219.95	-210.52	10.00	9.64	-3.86
7,850.00	50.96	278.93	7,715.19	269.71	183.04	-173.41	10.00	9.69	-3.28
7,892.95	55.14	277.69	7,741.00	274.66	149.08	-139.30	10.00	9.73	-2.88
Niobrara Top									
7,900.00	55.82	277.50	7,745.00	275.43	143.33	-133.52	10.00	9.75	-2.71
7,950.00	60.71	276.23	7,771.29	280.50	101.12	-91.16	10.00	9.76	-2.54
8,000.00	65.60	275.07	7,793.86	284.88	56.74	-46.65	10.00	9.79	-2.31
8,050.00	70.50	274.00	7,812.55	288.54	10.52	-0.34	10.00	9.80	-2.14
8,100.00	75.41	273.00	7,827.21	291.45	-37.18	47.43	10.00	9.81	-2.01
8,140.27	79.36	272.22	7,836.00	293.24	-76.43	86.72	10.00	9.82	-1.93

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well King 3-65 28-29 3CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5609.40ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5609.40ft (25' RKB)
Site:	King	North Reference:	True
Well:	King 3-65 28-29 3CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	King 3-65 28-29 3CH		
Design:	Design C		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
C Chalk Top										
8,150.00	80.32	272.04	7,837.72	293.60	-85.99	96.30	10.00	9.82	-1.90	
8,200.00	85.23	271.10	7,844.00	294.96	-135.56	145.88	10.00	9.83	-1.87	
8,243.34	89.49	270.31	7,846.00	295.49	-178.84	189.16	10.00	9.83	-1.84	
LP/BPI: 1849' FSL, 613' FEL										
8,300.00	89.49	270.31	7,846.51	295.79	-235.50	245.79	0.00	0.00	0.00	
8,400.00	89.49	270.31	7,847.40	296.32	-335.50	345.74	0.00	0.00	0.00	
8,500.00	89.49	270.31	7,848.29	296.86	-435.49	445.69	0.00	0.00	0.00	
8,600.00	89.49	270.31	7,849.18	297.39	-535.48	545.64	0.00	0.00	0.00	
8,700.00	89.49	270.31	7,850.07	297.92	-635.48	645.59	0.00	0.00	0.00	
8,800.00	89.49	270.31	7,850.96	298.46	-735.47	745.54	0.00	0.00	0.00	
8,900.00	89.49	270.31	7,851.85	298.99	-835.47	845.50	0.00	0.00	0.00	
9,000.00	89.49	270.31	7,852.74	299.53	-935.46	945.45	0.00	0.00	0.00	
9,100.00	89.49	270.31	7,853.63	300.06	-1,035.46	1,045.40	0.00	0.00	0.00	
9,200.00	89.49	270.31	7,854.52	300.59	-1,135.45	1,145.35	0.00	0.00	0.00	
9,300.00	89.49	270.31	7,855.41	301.13	-1,235.45	1,245.30	0.00	0.00	0.00	
9,400.00	89.49	270.31	7,856.31	301.66	-1,335.44	1,345.25	0.00	0.00	0.00	
9,500.00	89.49	270.31	7,857.20	302.19	-1,435.44	1,445.20	0.00	0.00	0.00	
9,600.00	89.49	270.31	7,858.09	302.73	-1,535.43	1,545.15	0.00	0.00	0.00	
9,700.00	89.49	270.31	7,858.98	303.26	-1,635.43	1,645.11	0.00	0.00	0.00	
9,800.00	89.49	270.31	7,859.87	303.80	-1,735.42	1,745.06	0.00	0.00	0.00	
9,900.00	89.49	270.31	7,860.76	304.33	-1,835.41	1,845.01	0.00	0.00	0.00	
10,000.00	89.49	270.31	7,861.65	304.86	-1,935.41	1,944.96	0.00	0.00	0.00	
10,100.00	89.49	270.31	7,862.54	305.40	-2,035.40	2,044.91	0.00	0.00	0.00	
10,200.00	89.49	270.31	7,863.43	305.93	-2,135.40	2,144.86	0.00	0.00	0.00	
10,300.00	89.49	270.31	7,864.32	306.46	-2,235.39	2,244.81	0.00	0.00	0.00	
10,400.00	89.49	270.31	7,865.22	307.00	-2,335.39	2,344.76	0.00	0.00	0.00	
10,500.00	89.49	270.31	7,866.11	307.53	-2,435.38	2,444.71	0.00	0.00	0.00	
10,600.00	89.49	270.31	7,867.00	308.07	-2,535.38	2,544.67	0.00	0.00	0.00	
10,700.00	89.49	270.31	7,867.89	308.60	-2,635.37	2,644.62	0.00	0.00	0.00	
10,800.00	89.49	270.31	7,868.78	309.13	-2,735.37	2,744.57	0.00	0.00	0.00	
10,900.00	89.49	270.31	7,869.67	309.67	-2,835.36	2,844.52	0.00	0.00	0.00	
11,000.00	89.49	270.31	7,870.56	310.20	-2,935.35	2,944.47	0.00	0.00	0.00	
11,100.00	89.49	270.31	7,871.45	310.73	-3,035.35	3,044.42	0.00	0.00	0.00	
11,200.00	89.49	270.31	7,872.34	311.27	-3,135.34	3,144.37	0.00	0.00	0.00	
11,300.00	89.49	270.31	7,873.23	311.80	-3,235.34	3,244.32	0.00	0.00	0.00	
11,400.00	89.49	270.31	7,874.13	312.34	-3,335.33	3,344.28	0.00	0.00	0.00	
11,500.00	89.49	270.31	7,875.02	312.87	-3,435.33	3,444.23	0.00	0.00	0.00	
11,600.00	89.49	270.31	7,875.91	313.40	-3,535.32	3,544.18	0.00	0.00	0.00	
11,700.00	89.49	270.31	7,876.80	313.94	-3,635.32	3,644.13	0.00	0.00	0.00	
11,800.00	89.49	270.31	7,877.69	314.47	-3,735.31	3,744.08	0.00	0.00	0.00	
11,900.00	89.49	270.31	7,878.58	315.00	-3,835.31	3,844.03	0.00	0.00	0.00	
12,000.00	89.49	270.31	7,879.47	315.54	-3,935.30	3,943.98	0.00	0.00	0.00	
12,100.00	89.49	270.31	7,880.36	316.07	-4,035.30	4,043.93	0.00	0.00	0.00	
12,200.00	89.49	270.31	7,881.25	316.61	-4,135.29	4,143.89	0.00	0.00	0.00	
12,300.00	89.49	270.31	7,882.14	317.14	-4,235.28	4,243.84	0.00	0.00	0.00	
12,400.00	89.49	270.31	7,883.04	317.67	-4,335.28	4,343.79	0.00	0.00	0.00	
12,500.00	89.49	270.31	7,883.93	318.21	-4,435.27	4,443.74	0.00	0.00	0.00	
12,600.00	89.49	270.31	7,884.82	318.74	-4,535.27	4,543.69	0.00	0.00	0.00	
12,700.00	89.49	270.31	7,885.71	319.27	-4,635.26	4,643.64	0.00	0.00	0.00	
12,800.00	89.49	270.31	7,886.60	319.81	-4,735.26	4,743.59	0.00	0.00	0.00	
12,900.00	89.49	270.31	7,887.49	320.34	-4,835.25	4,843.54	0.00	0.00	0.00	
13,000.00	89.49	270.31	7,888.38	320.88	-4,935.25	4,943.49	0.00	0.00	0.00	

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well King 3-65 28-29 3CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5609.40ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5609.40ft (25' RKB)
Site:	King	North Reference:	True
Well:	King 3-65 28-29 3CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	King 3-65 28-29 3CH		
Design:	Design C		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
13,100.00	89.49	270.31	7,889.27	321.41	-5,035.24	5,043.45	0.00	0.00	0.00	
13,200.00	89.49	270.31	7,890.16	321.94	-5,135.24	5,143.40	0.00	0.00	0.00	
13,300.00	89.49	270.31	7,891.05	322.48	-5,235.23	5,243.35	0.00	0.00	0.00	
13,400.00	89.49	270.31	7,891.94	323.01	-5,335.23	5,343.30	0.00	0.00	0.00	
13,500.00	89.49	270.31	7,892.84	323.54	-5,435.22	5,443.25	0.00	0.00	0.00	
13,600.00	89.49	270.31	7,893.73	324.08	-5,535.21	5,543.20	0.00	0.00	0.00	
13,700.00	89.49	270.31	7,894.62	324.61	-5,635.21	5,643.15	0.00	0.00	0.00	
13,800.00	89.49	270.31	7,895.51	325.15	-5,735.20	5,743.10	0.00	0.00	0.00	
13,900.00	89.49	270.31	7,896.40	325.68	-5,835.20	5,843.06	0.00	0.00	0.00	
14,000.00	89.49	270.31	7,897.29	326.21	-5,935.19	5,943.01	0.00	0.00	0.00	
14,100.00	89.49	270.31	7,898.18	326.75	-6,035.19	6,042.96	0.00	0.00	0.00	
14,200.00	89.49	270.31	7,899.07	327.28	-6,135.18	6,142.91	0.00	0.00	0.00	
14,300.00	89.49	270.31	7,899.96	327.81	-6,235.18	6,242.86	0.00	0.00	0.00	
14,400.00	89.49	270.31	7,900.85	328.35	-6,335.17	6,342.81	0.00	0.00	0.00	
14,500.00	89.49	270.31	7,901.75	328.88	-6,435.17	6,442.76	0.00	0.00	0.00	
14,600.00	89.49	270.31	7,902.64	329.42	-6,535.16	6,542.71	0.00	0.00	0.00	
14,700.00	89.49	270.31	7,903.53	329.95	-6,635.16	6,642.67	0.00	0.00	0.00	
14,800.00	89.49	270.31	7,904.42	330.48	-6,735.15	6,742.62	0.00	0.00	0.00	
14,900.00	89.49	270.31	7,905.31	331.02	-6,835.14	6,842.57	0.00	0.00	0.00	
15,000.00	89.49	270.31	7,906.20	331.55	-6,935.14	6,942.52	0.00	0.00	0.00	
15,100.00	89.49	270.31	7,907.09	332.08	-7,035.13	7,042.47	0.00	0.00	0.00	
15,200.00	89.49	270.31	7,907.98	332.62	-7,135.13	7,142.42	0.00	0.00	0.00	
15,300.00	89.49	270.31	7,908.87	333.15	-7,235.12	7,242.37	0.00	0.00	0.00	
15,400.00	89.49	270.31	7,909.76	333.69	-7,335.12	7,342.32	0.00	0.00	0.00	
15,500.00	89.49	270.31	7,910.66	334.22	-7,435.11	7,442.27	0.00	0.00	0.00	
15,600.00	89.49	270.31	7,911.55	334.75	-7,535.11	7,542.23	0.00	0.00	0.00	
15,700.00	89.49	270.31	7,912.44	335.29	-7,635.10	7,642.18	0.00	0.00	0.00	
15,800.00	89.49	270.31	7,913.33	335.82	-7,735.10	7,742.13	0.00	0.00	0.00	
15,900.00	89.49	270.31	7,914.22	336.35	-7,835.09	7,842.08	0.00	0.00	0.00	
16,000.00	89.49	270.31	7,915.11	336.89	-7,935.09	7,942.03	0.00	0.00	0.00	
16,100.00	89.49	270.31	7,916.00	337.42	-8,035.08	8,041.98	0.00	0.00	0.00	
16,200.00	89.49	270.31	7,916.89	337.96	-8,135.07	8,141.93	0.00	0.00	0.00	
16,300.00	89.49	270.31	7,917.78	338.49	-8,235.07	8,241.88	0.00	0.00	0.00	
16,400.00	89.49	270.31	7,918.67	339.02	-8,335.06	8,341.84	0.00	0.00	0.00	
16,500.00	89.49	270.31	7,919.57	339.56	-8,435.06	8,441.79	0.00	0.00	0.00	
16,600.00	89.49	270.31	7,920.46	340.09	-8,535.05	8,541.74	0.00	0.00	0.00	
16,700.00	89.49	270.31	7,921.35	340.62	-8,635.05	8,641.69	0.00	0.00	0.00	
16,800.00	89.49	270.31	7,922.24	341.16	-8,735.04	8,741.64	0.00	0.00	0.00	
16,900.00	89.49	270.31	7,923.13	341.69	-8,835.04	8,841.59	0.00	0.00	0.00	
17,000.00	89.49	270.31	7,924.02	342.23	-8,935.03	8,941.54	0.00	0.00	0.00	
17,100.00	89.49	270.31	7,924.91	342.76	-9,035.03	9,041.49	0.00	0.00	0.00	
17,200.00	89.49	270.31	7,925.80	343.29	-9,135.02	9,141.45	0.00	0.00	0.00	
17,300.00	89.49	270.31	7,926.69	343.83	-9,235.02	9,241.40	0.00	0.00	0.00	
17,400.00	89.49	270.31	7,927.58	344.36	-9,335.01	9,341.35	0.00	0.00	0.00	
17,500.00	89.49	270.31	7,928.47	344.89	-9,435.00	9,441.30	0.00	0.00	0.00	
17,600.00	89.49	270.31	7,929.37	345.43	-9,535.00	9,541.25	0.00	0.00	0.00	
17,700.00	89.49	270.31	7,930.26	345.96	-9,634.99	9,641.20	0.00	0.00	0.00	
17,800.00	89.49	270.31	7,931.15	346.50	-9,734.99	9,741.15	0.00	0.00	0.00	
17,895.65	89.49	270.31	7,932.00	347.01	-9,830.63	9,836.76	0.00	0.00	0.00	
BHL: 1849' FSL, 325' FWL - 5-1/2" Casing										

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well King 3-65 28-29 3CH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5609.40ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5609.40ft (25' RKB)
Site:	King	North Reference:	True
Well:	King 3-65 28-29 3CH	Survey Calculation Method:	Minimum Curvature
Wellbore:	King 3-65 28-29 3CH		
Design:	Design C		

Design Targets

Target Name

- hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
King 3-65 28-29 3CH - plan hits target center - Point	0.00	0.00	7,846.00	295.49	-178.84	1,156,381.248	3,235,696.717	39° 45' 34.470 N	104° 39' 41.870 W
King 3-65 28-29 3CH - plan hits target center - Point	0.00	0.00	7,932.00	347.01	-9,830.64	1,156,341.445	3,226,044.946	39° 45' 34.960 N	104° 41' 45.460 W

Casing Points

Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (")	Hole Diameter (")
2,139.00	2,139.00	9-5/8" Casing	9-5/8	12-1/4
17,895.65	7,932.00	5-1/2" Casing	5-1/2	8-1/2

Formations

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,697.00	1,697.00	Fox Hills Top		0.00	
1,939.00	1,939.00	Pierre Top - Fox Hills Base		0.00	
2,139.00	2,139.00	Surface Casing		0.00	
7,892.95	7,741.00	Niobrara Top		0.00	
8,140.27	7,836.00	C Chalk Top		0.00	

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
100.00	100.00	0.00	0.00	SHL: 1554' FSL, 435' FEL
7,092.88	7,039.53	142.91	332.82	EOB: 1697' FSL, 102' FEL
7,119.02	7,063.19	147.30	343.03	KOP: 1701' FSL, 92' FEL
8,243.34	7,846.00	295.49	-178.84	LP/BPI: 1849' FSL, 613' FEL
17,895.65	7,932.00	347.01	-9,830.63	BHL: 1849' FSL, 325' FWL