



HIGH DEFINITION INDUCTION LOGSM
COMPENSATED Z-DENSITY LOGSM
NEUTRON LOGSM
CALIPER LOGSM
GAMMA RAY LOGSM

FILE NO: 133758
API NO: 05077103970000
COMPANY: LARAMIE ENERGY II LLC
WELL: NICHOLS 0994-24-11E
FIELD: VEGA
COUNTY: MESA
STATE: COLORADO

Ver. 4.10
H&P 290
LOCATION: SHL 2265' FNL 2795' FWL
BHL 2523' FNL 1444' FEL
SEC 24 TWP 9S RGE 94W
OTHER SERVICES: NONE

PERMANENT DATUM: GL ELEVATION 7212 FT
LOG MEASURED FROM: KB 24 FT ABOVE P.D.
DRILL. MEAS. FROM: KB
ELEVATIONS: KB 7236 FT
DF
GL 7212 FT

DATE	09-Mar-2018
RUN	1
TRIP	1
SERVICE ORDER	US133758J
DEPTH DRILLER	7673 FT
DEPTH LOGGER	DID NOT REACH TD
BOTTOM LOGGED INTERVAL	4530 FT
TOP LOGGED INTERVAL	0 FT
CASING DRILLER	8.625 IN @ 1566 FT
CASING LOGGER	1566 FT @
BIT SIZE	7.875 IN
TYPE OF FLUID IN HOLE	WBM
DENSITY	10.1 LB/G 48 CP
PH	8.8 6.6 C3
SOURCE OF SAMPLE	TOOL MEASURED
RM AT MEAS. TEMP.	1 OHMM @ 97.3 DEGF
RMF AT MEAS. TEMP.	0.75 OHMM @ 97.3 DEGF
RMG AT MEAS. TEMP.	1.25 OHMM @ 97.3 DEGF
SOURCE OF RMF	CALCULATED
RM AT BHT	0.762 OHMM @ 136.8 DEGF
TIME SINCE CIRCULATION	4 HOURS
MAX. RECORDED TEMP.	136.8 DEGF
EQUIP. NO.	4291
LOCATION	GRAND JCT
RECORDED BY	W. QUIGLEY
WITNESSED BY	MR. ROGER FOSTER

IN MAKING INTERPRETATIONS OF LOGS OUR EMPLOYEES WILL GIVE THE CUSTOMER THE BENEFIT OF THEIR BEST JUDGEMENT. BUT SINCE ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS, WE CANNOT, AND WE DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATION. WE SHALL NOT BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COST, DAMAGES, OR EXPENSES WHATSOEVER INCURRED OR SUSTAINED BY THE CUSTOMER RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR EMPLOYEES.

REMARKS

RUN 1 TRIP 1: FIRST TRIP: REACHED 2395 FT AND BRIDGED. LOGGED OUT AND WIPER TRIP TO 5000'
SECOND TRIP: REACHED 4533 FT. POOH TO REMOVE BOWSPRING AND ADD HOLEFINDER
THIRD TRIP: NO BOWSPRING. HOLEFINDER ADDED - REACHED 2286 FT
FOURTH TRIP: NO BOWSPRING, NO HOLEFINDER - REACHED 4530 FT

LOGS WERE RECORDED 2ND TRIP WITH BOWSPRING

GR OR NEUTRON JIG NOT AVAILABLE FOR VERIFICATIONS

THANK YOU FOR CHOOSING BAKER HUGHES, A GE COMPANY
CREW: ROBERT ZUNIGA, AUSTIN WAGGONER, ALI SHAHNOOSHI

EQUIPMENT DATA

RUN	TRIP	TOOL	SERIES NO.	SERIAL NO.	POSITION
1	1	TTRM	3981XA	10045153	FREE
1	1	TELEM	3514XA	10223701	FREE
1	1	GAMMA RAY	1329XA	363173	FREE

MAIN LOG 2"/100FT SCALE

Plotted: Sat Mar 10 16:20:14 2018

```
FILE: /dat1a/LARAMIE_NICHOLS_0994-24-11E/p777q02.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 1435.000 ft BOTTOM DEPTH: 2398.000 ft
```

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
TTRM	FILTER ()	medium (1)		TOP	BOTTOM
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	medium (1)		"	"
GR	FILTER ()	medium (1)		"	"
CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
SP-SPDH	FILTER ()	medium (1)		"	"

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
BIT SIZE	BIT SIZE	7.875	in	TOP	BOTTOM
MUD SAMPLE RESISTIVITY	MUD SAMPLE TEMP	97.3	degF	"	"
	MUD SAMPLE RES	1.000	ohm.m	"	"
BOREHOLE TEMP from GRADIENT	Known BH REF TEMP	97.3	degF	"	"
	at BH REF DEPTH	1754.0	ft	"	"
	with TEMP GRADIENT	1.200	0.01 degF/ft	"	"
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		"	"
BOREHOLE CORR DIAMETER	FIXED DIAMETER (mbh*)	7.875	in	"	"
BH MUD RESISTIVITY SOURCE	RMUD SOURCE (HDIL)	TOOL MEASURED		TOP	2189.000
		MUD SAMP DERIVED		2189.000	BOTTOM

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		"	"
	ABC to CALCULATE	STANDOFF		"	"
	STANDOFF	1.50	in	"	"
	TOOL POSITION	ECCENTERED		"	"
	Rmud MULTIPLIER	1.000		"	"

FILE: /dat1a/LARAMIE_NICHOLS_0994-24-11E/p777q04.prm
 LOGGING MODE: DEPTH DIRECTION: UP
 TOP DEPTH: 2217.250 ft BOTTOM DEPTH: 4531.906 ft

SYMMETRIC FILTER					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
TTRM	FILTER ()	medium (1)		TOP	BOTTOM
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	light (2)		"	"
GR	FILTER ()	medium (1)		"	"
CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
SP-SPDH	FILTER ()	medium (1)		"	"

BOREHOLE & CEMENT					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
BIT SIZE	BIT SIZE	7.875	in	TOP	BOTTOM
MUD SAMPLE RESISTIVITY	MUD SAMPLE TEMP	97.3	degF	"	"
	MUD SAMPLE RES	1.000	ohm.m	"	"
BOREHOLE TEMP from GRADIENT	Known BH REF TEMP	97.3	degF	"	"
	at BH REF DEPTH	1754.0	ft	"	"
	with TEMP GRADIENT	1.200	0.01 degF/ft	"	"
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		"	"
BOREHOLE CORR DIAMETER	FIXED DIAMETER (mbh*)	7.875	in	"	"
BH MUD RESISTIVITY SOURCE	RMUD SOURCE (HDIL)	TOOL MEASURED		"	"

HDIL PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		"	"
	ABC to CALCULATE	STANDOFF		"	"
	STANDOFF	1.50	in	"	"
	TOOL POSITION	ECCENTERED		"	"
	Rmud MULTIPLIER	1.000		"	"

CURVE DESCRIPTION REPORT		
CURVE NAME	CREATION DATE	CURVE DESCRIPTION
F1:GR	N/A	GAMMA RAY
F1:M0C6	N/A	FOCUSED CONDUCTIVITY, 60-INCH DOI
F1:M0R2	N/A	TRUE FOCUSED RESISTIVITY FOR HDIL, 20-INCH DOI
F1:M0R6	N/A	TRUE FOCUSED RESISTIVITY FOR HDIL, 60-INCH DOI
F1:SP	N/A	SPONTANEOUS POTENTIAL
F1:TEN	N/A	DIFFERENTIAL TENSION

CURVE MEASURE POINT OFFSET							
CURVE	OFFSET (ft)	CURVE	OFFSET (ft)	CURVE	OFFSET (ft)	CURVE	OFFSET (ft)
GR	-52.25	M0R2	-8.00	SP	-14.00		
M0C6	-8.00	M0R6	-8.00	TEN	0.00		

Presentation	: SysA:/dat1a/LARAMIE_NICHOLS_0994-24-11E/LARAMIE_2IN.fvpdf [2"/100' Scale]
Plot Interval	: -16.5 - 4537.75 Feet
Data File 1	: F1 : SysA:/dat1a/LARAMIE_NICHOLS_0994-24-11E/p777qMAINSPL.xtf
Created On	: N/A
Company	: LARAMIE ENERGY II LLC
Well	: NICHOLS 0994-24-11E
Field	: VEGA
File Interval	: -16.5 - 4537.75 Feet
OCT	: p777q



SP [sp]

-200

50

0

SHALLOW [m0r2]

100 500

60 in. DOI [m0c6]

0

AMPLIFIED SHALLOW [m0r2]

0

20

OVERRANGE DEEP [m0r6]

100

1000

OVERRANGE SHALLOW [m0r2]

100

1000


0

100

200

300

400

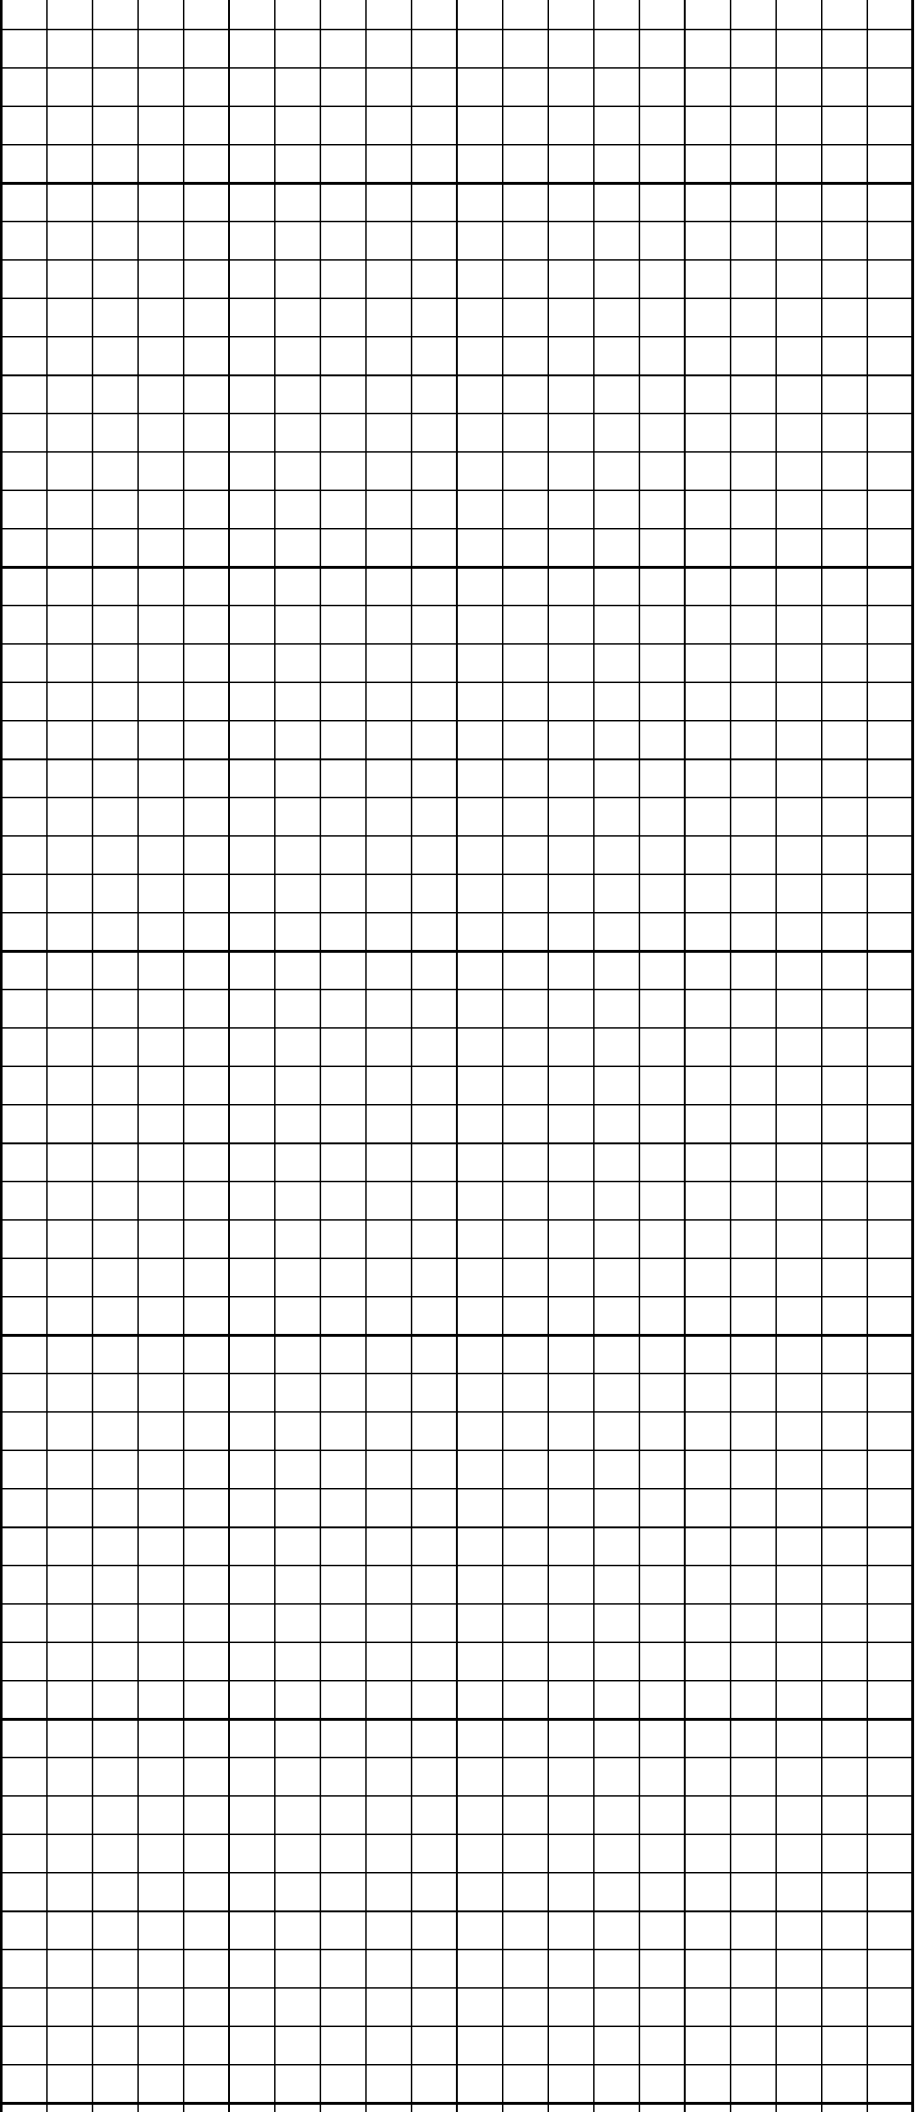

500


600



700




800



900



1000


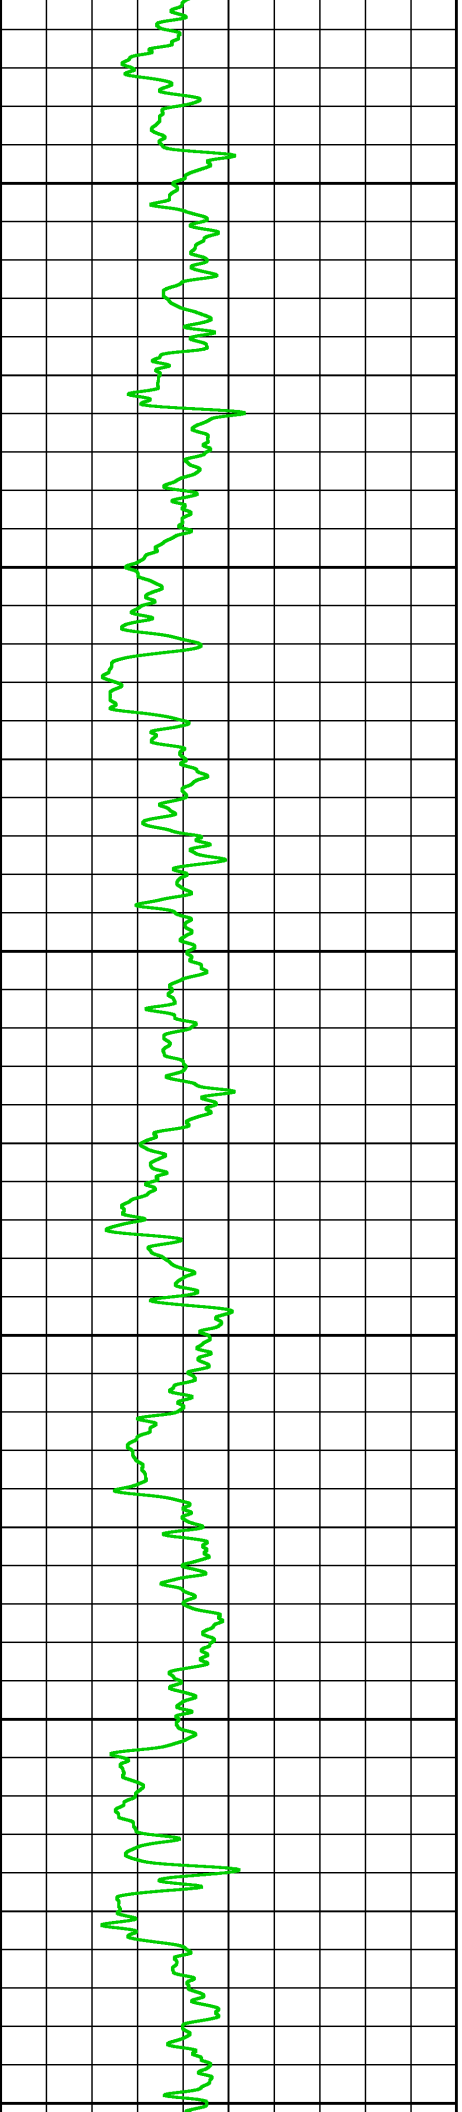


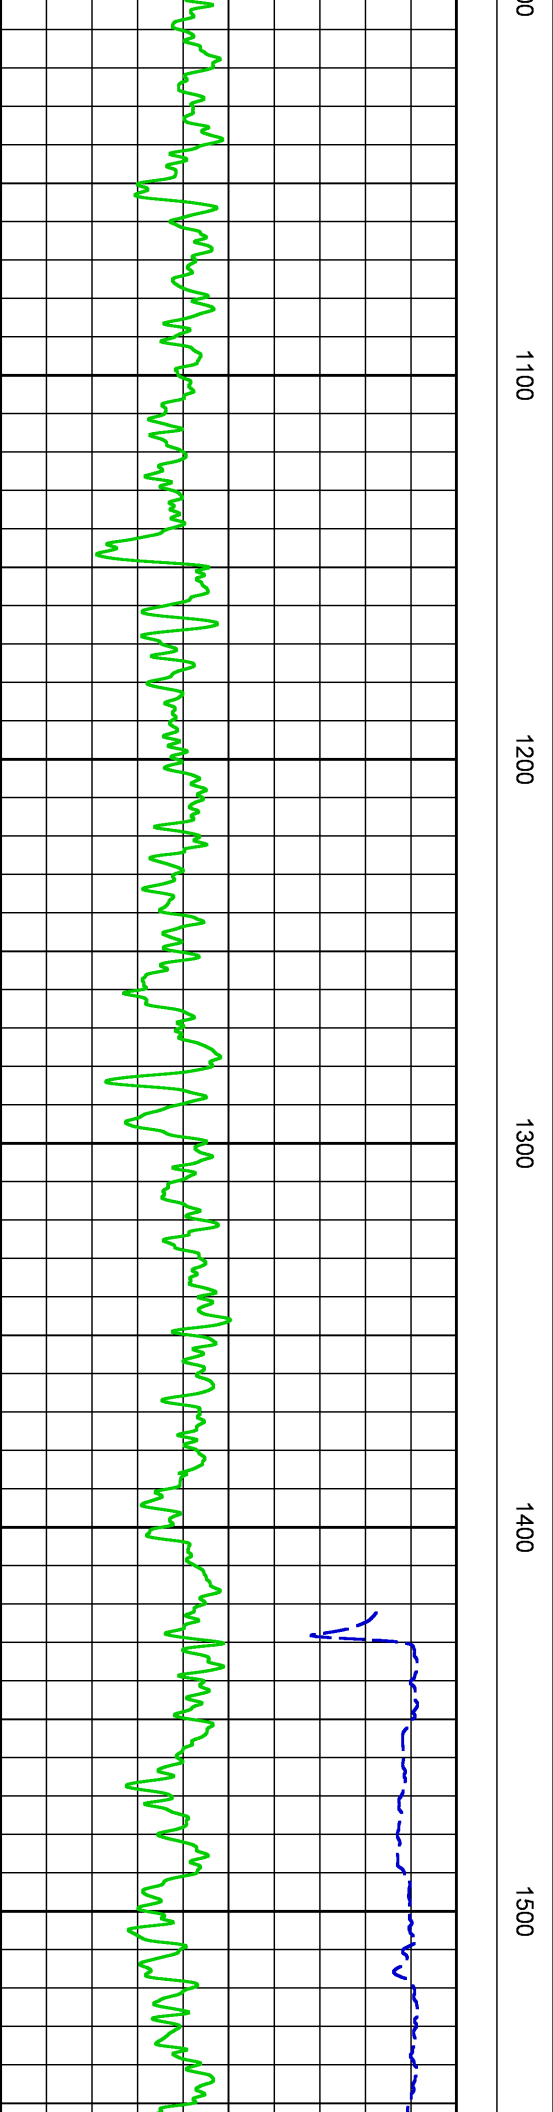
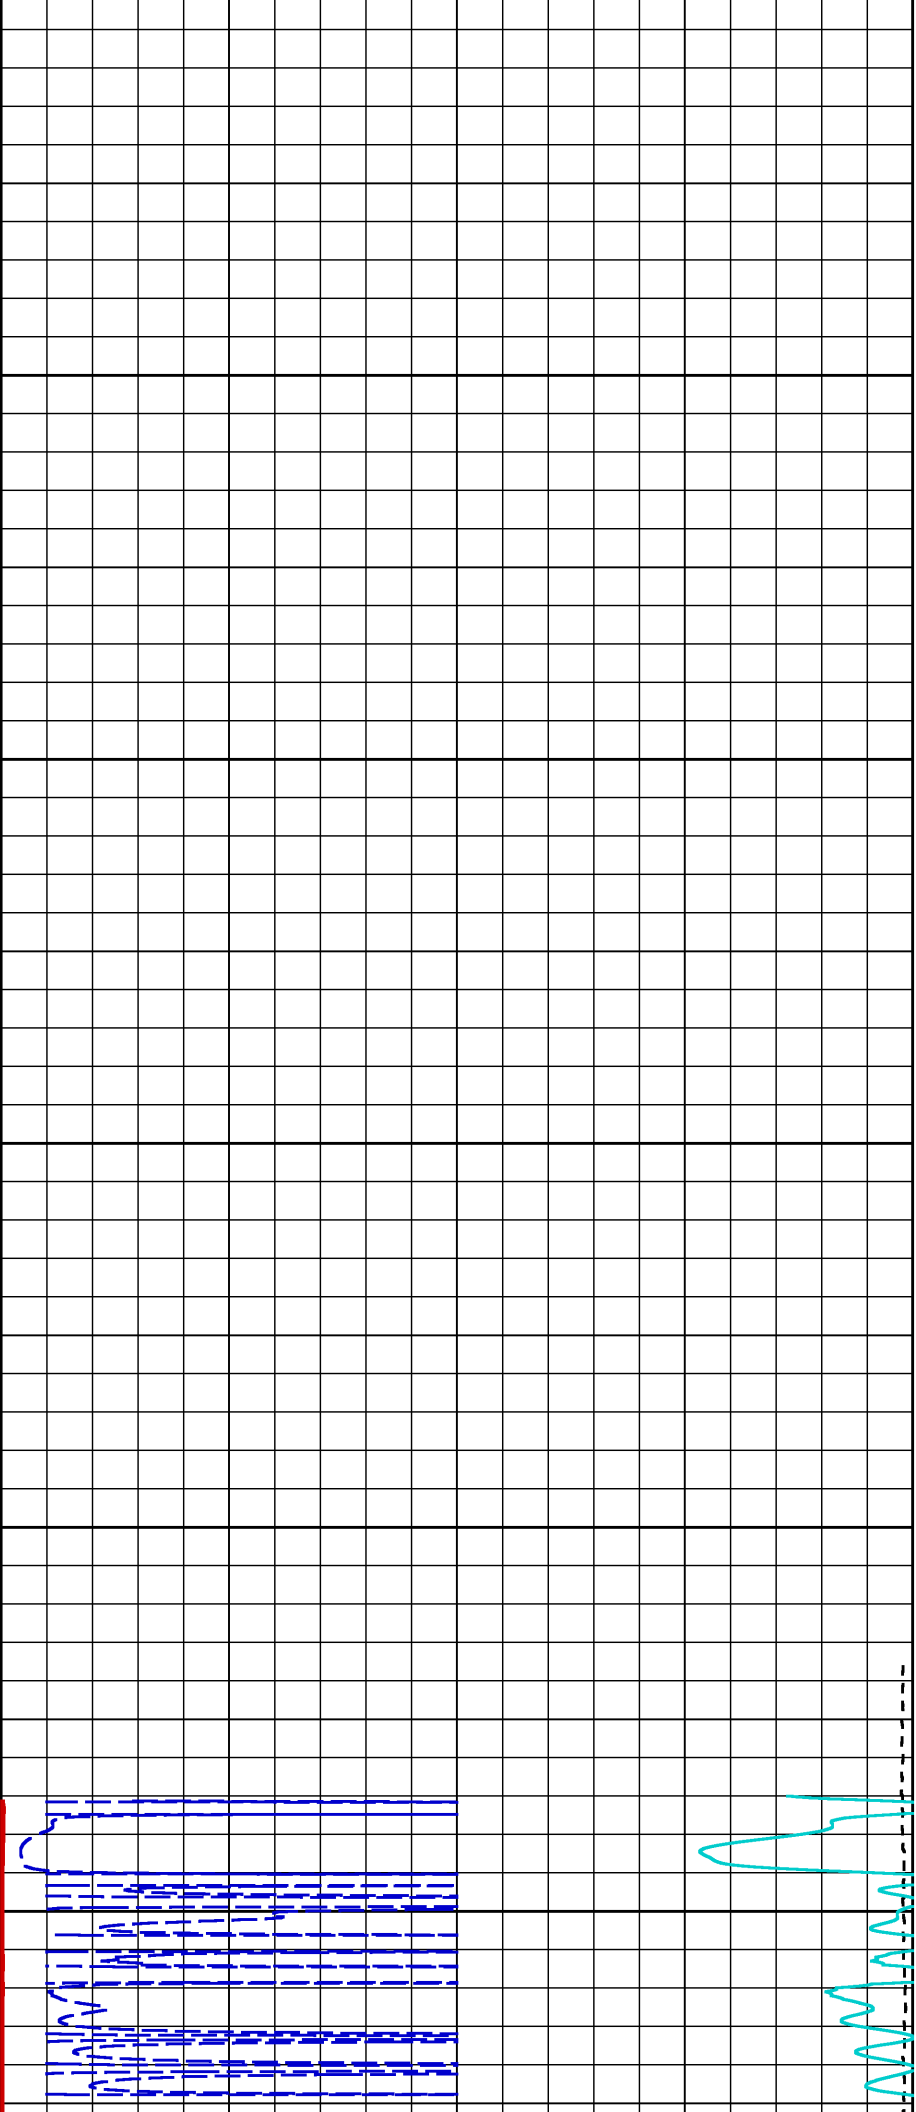


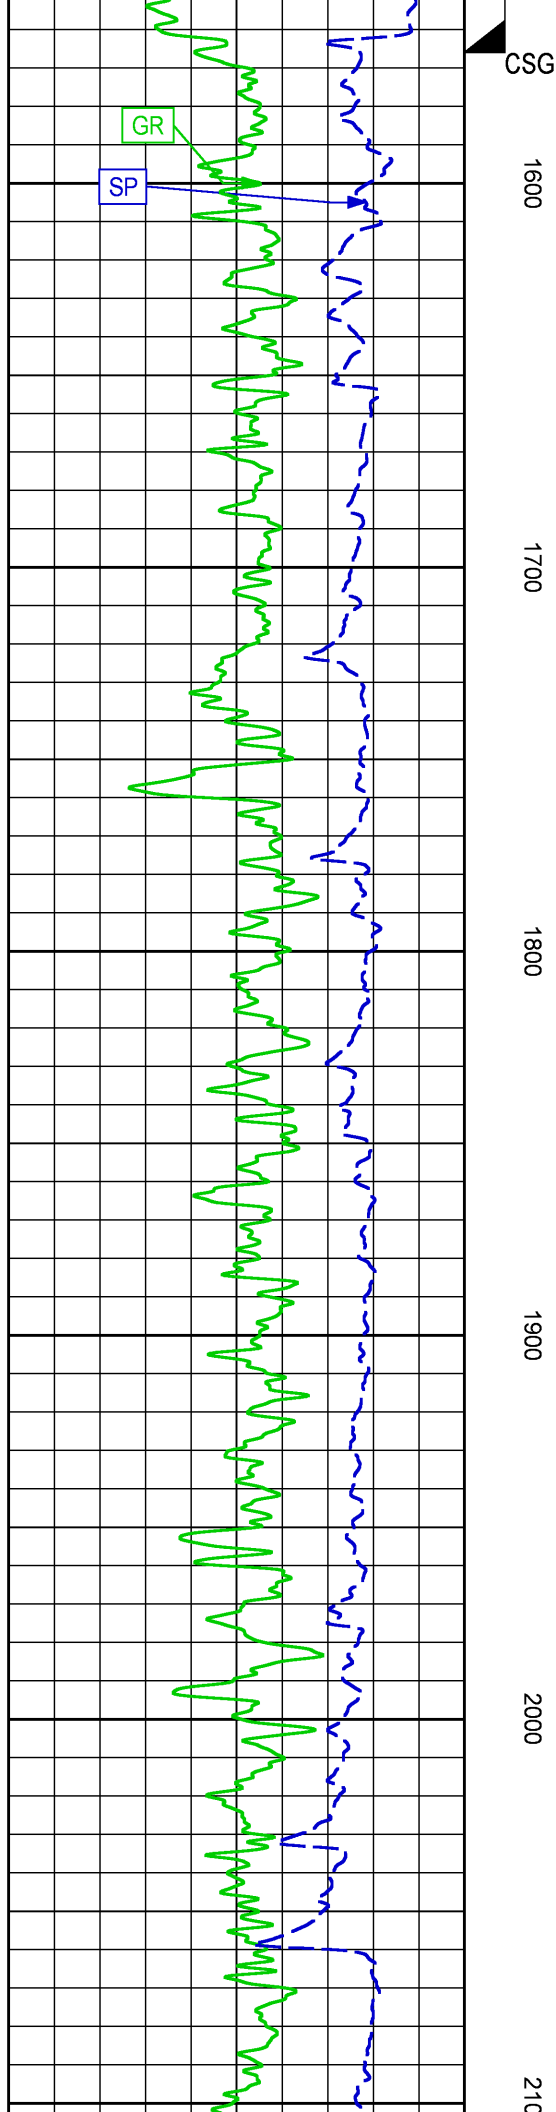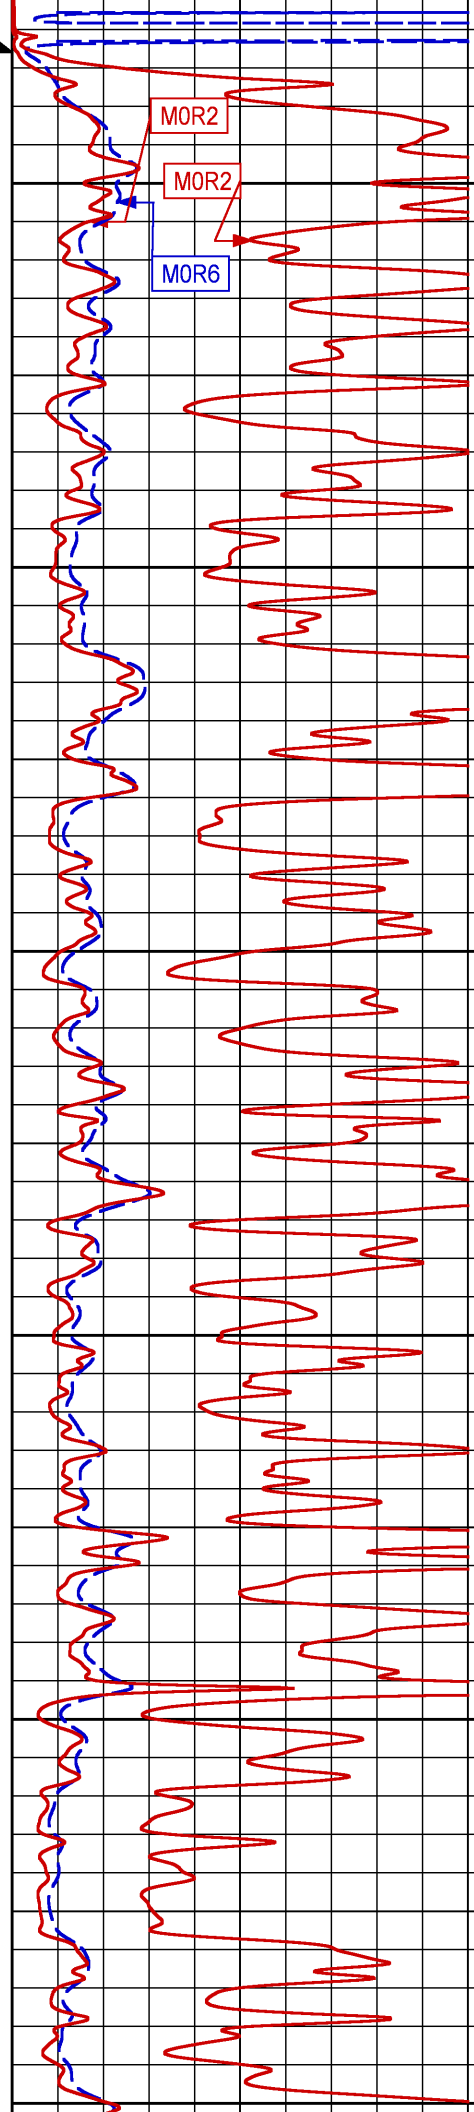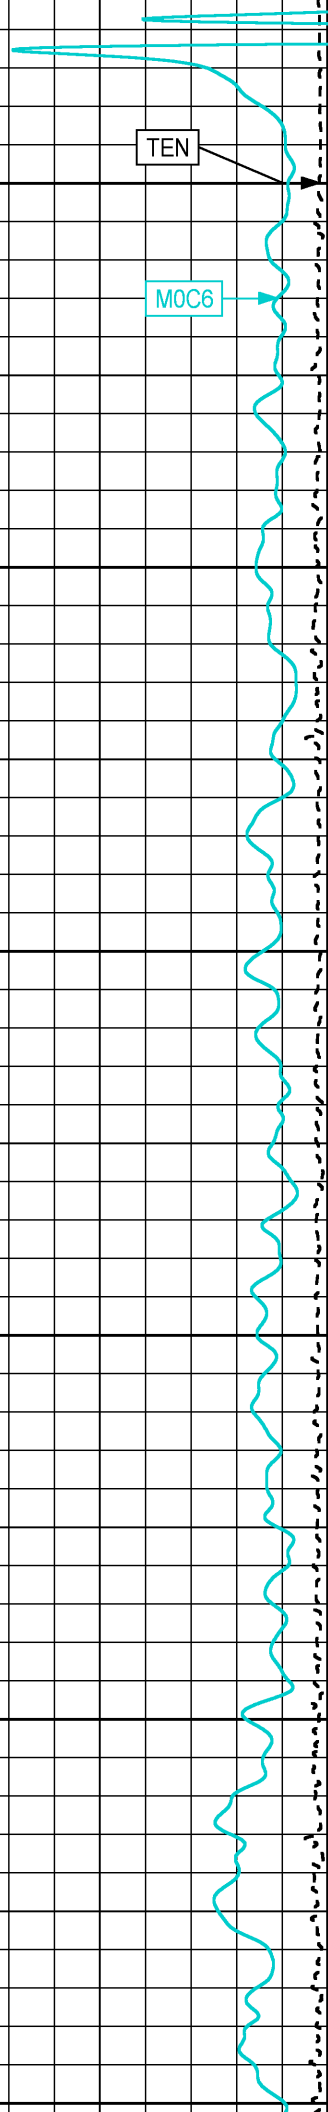


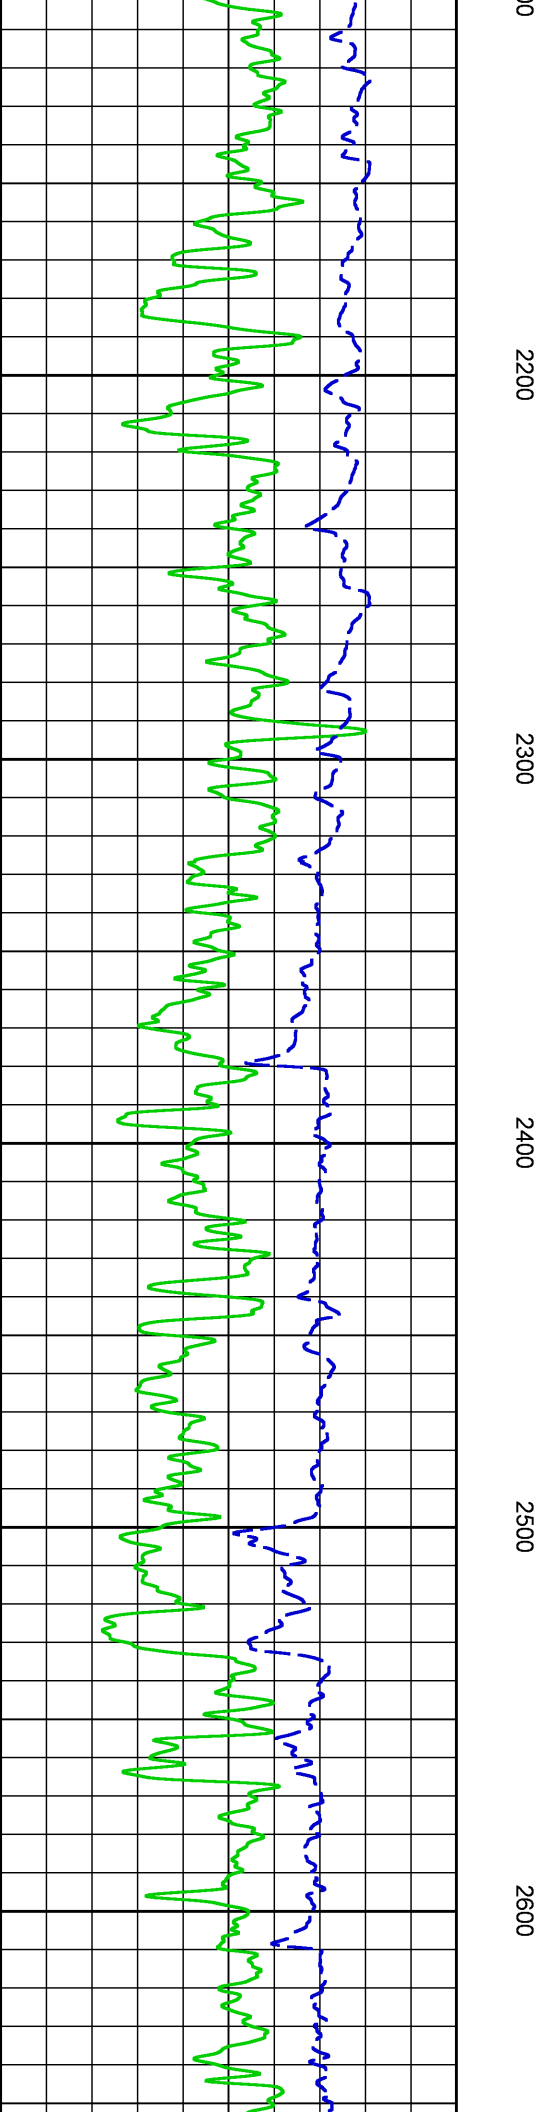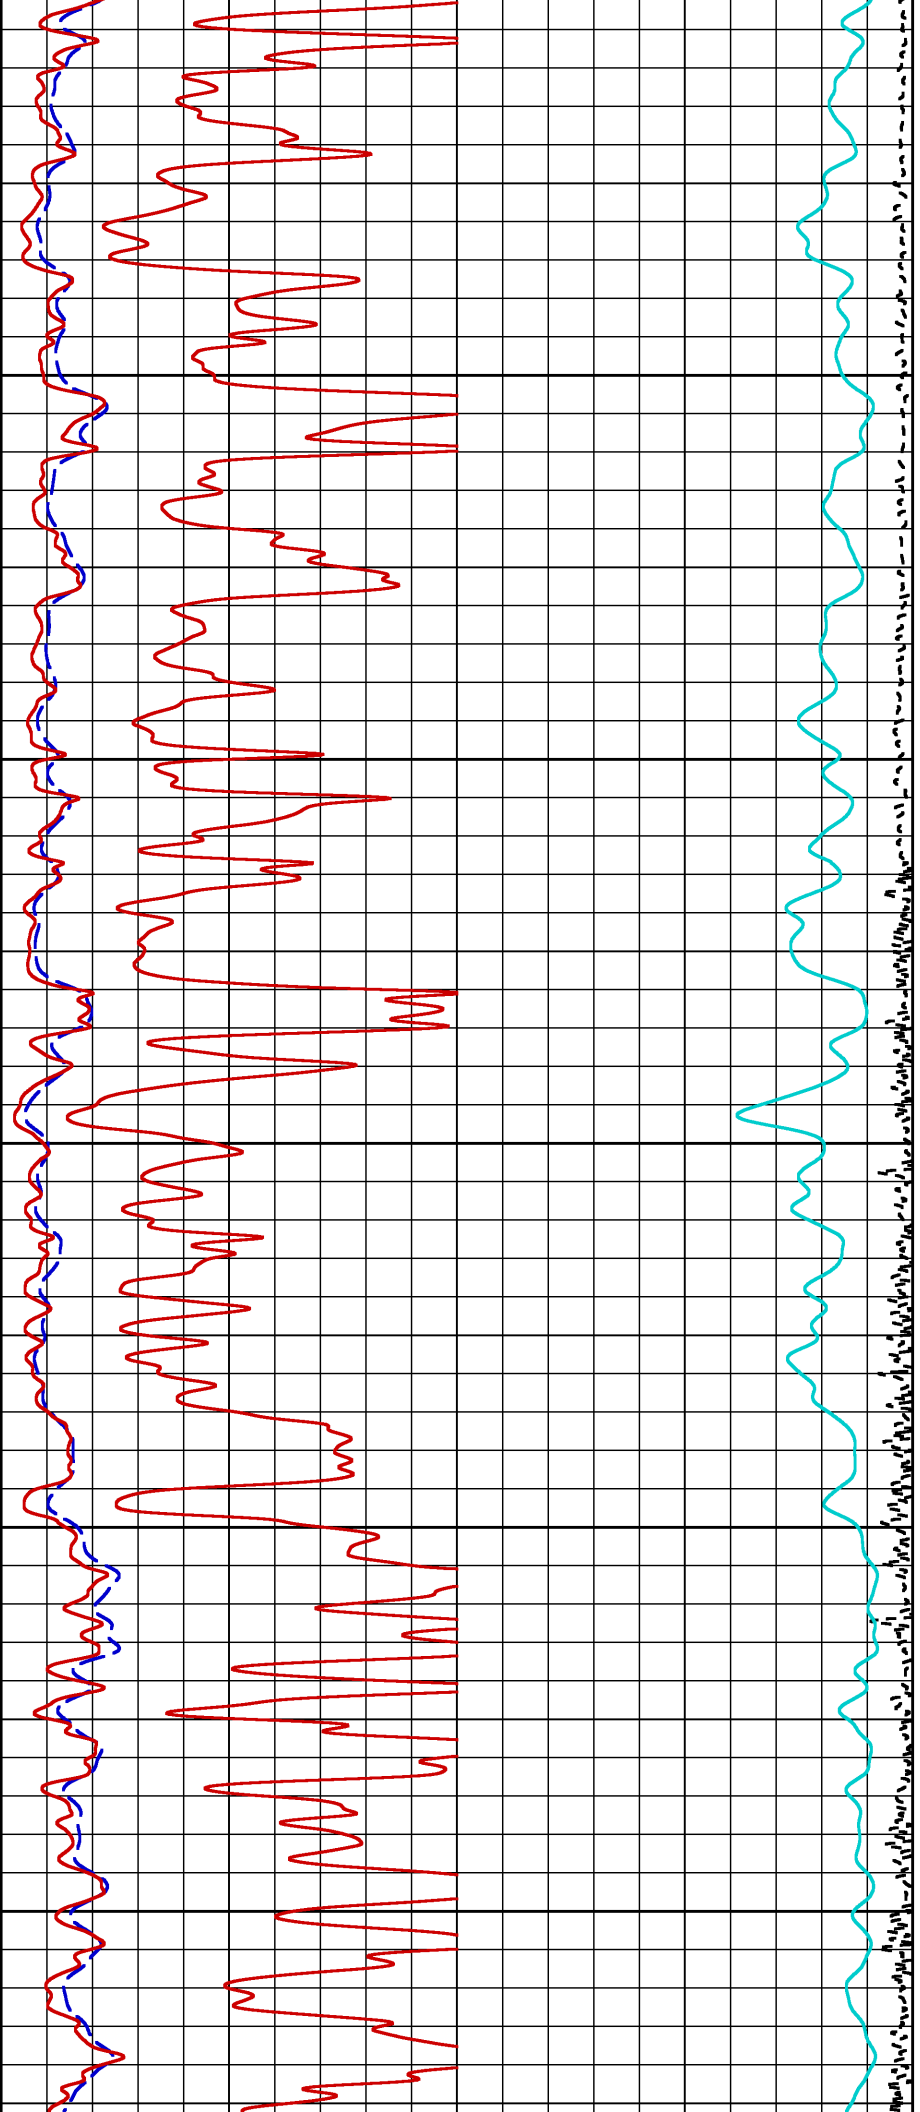

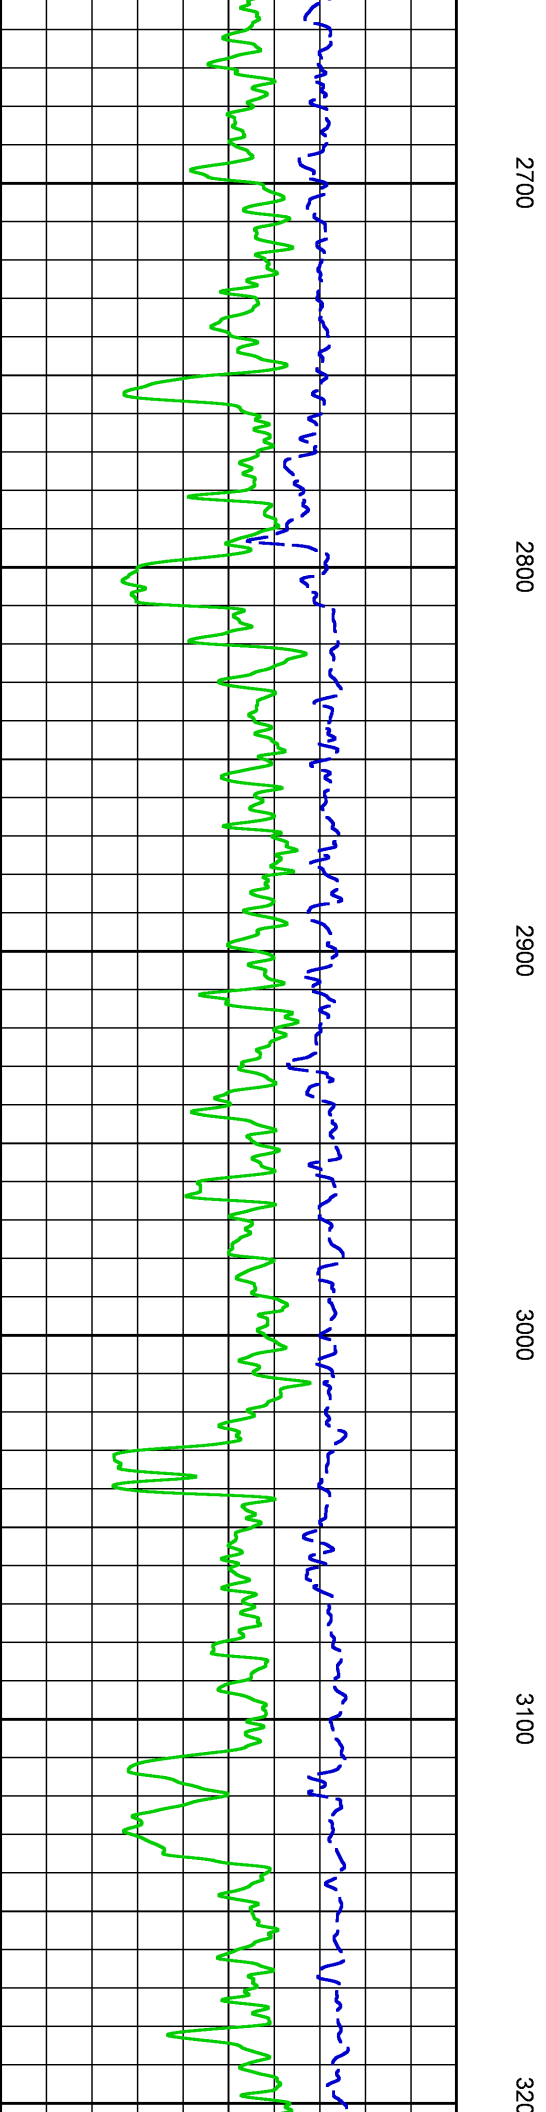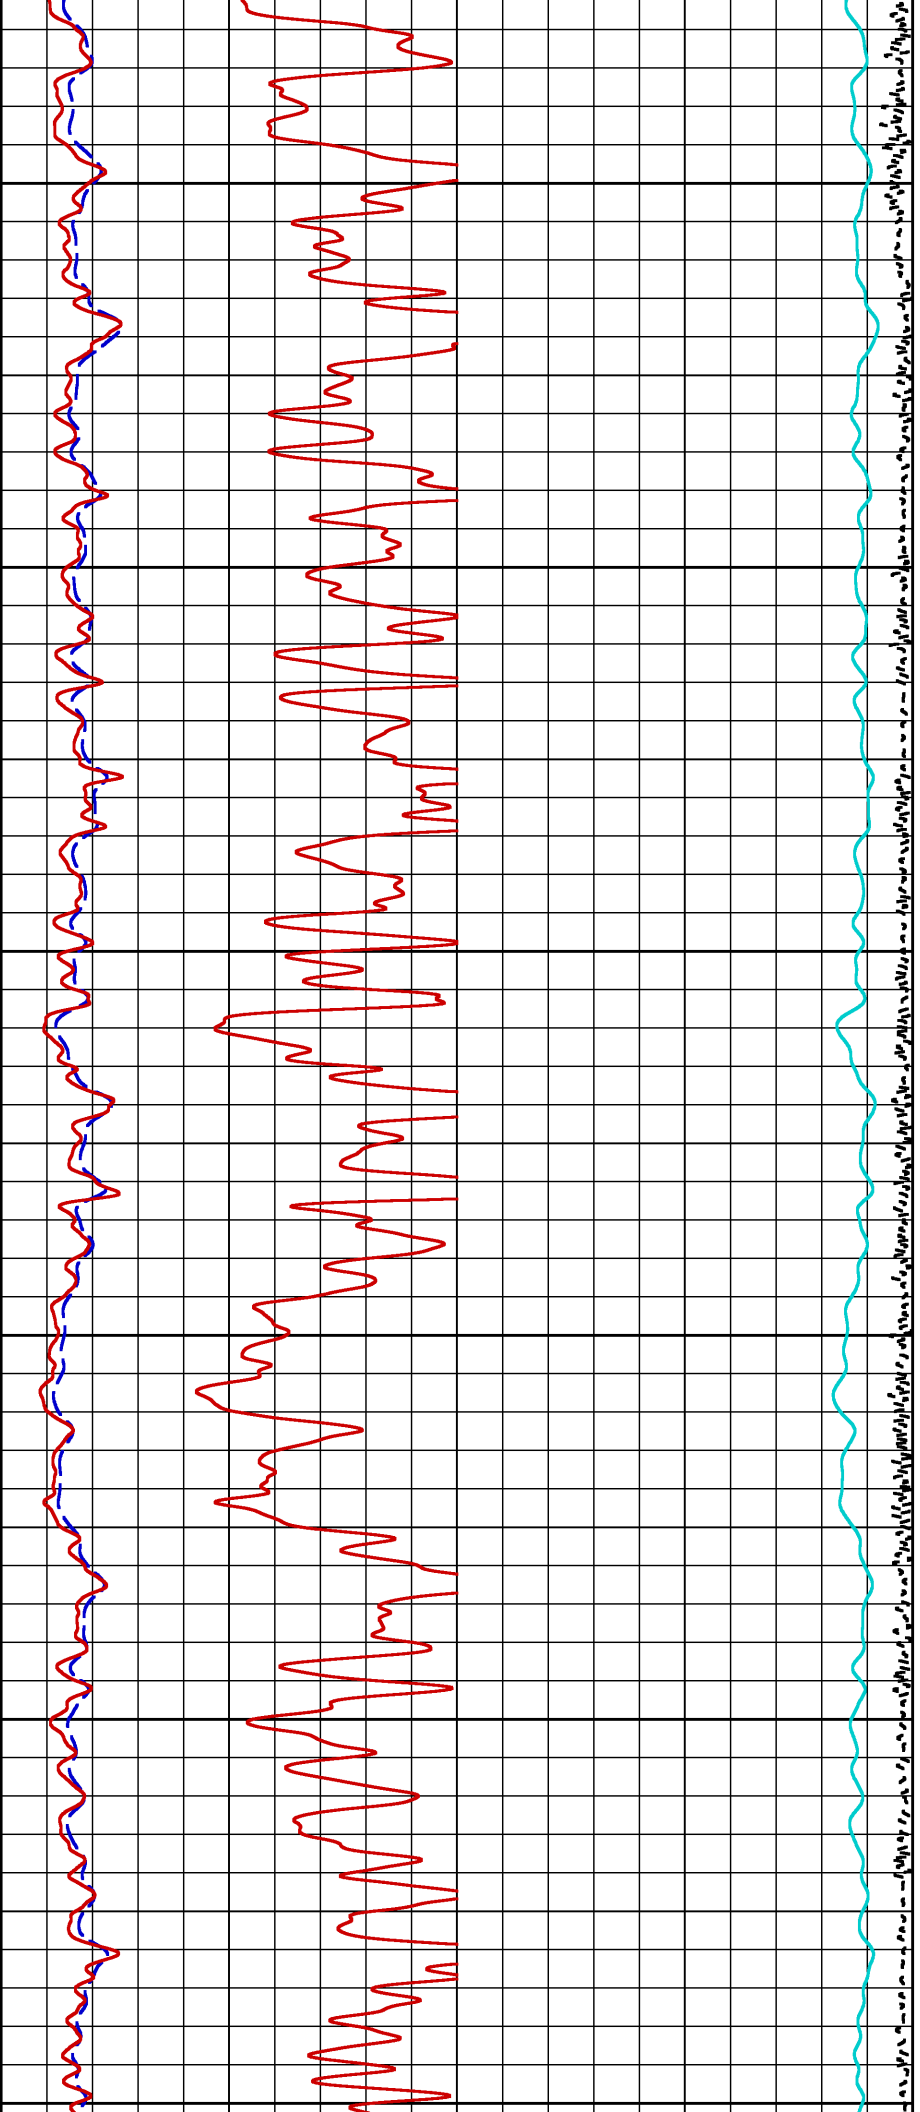

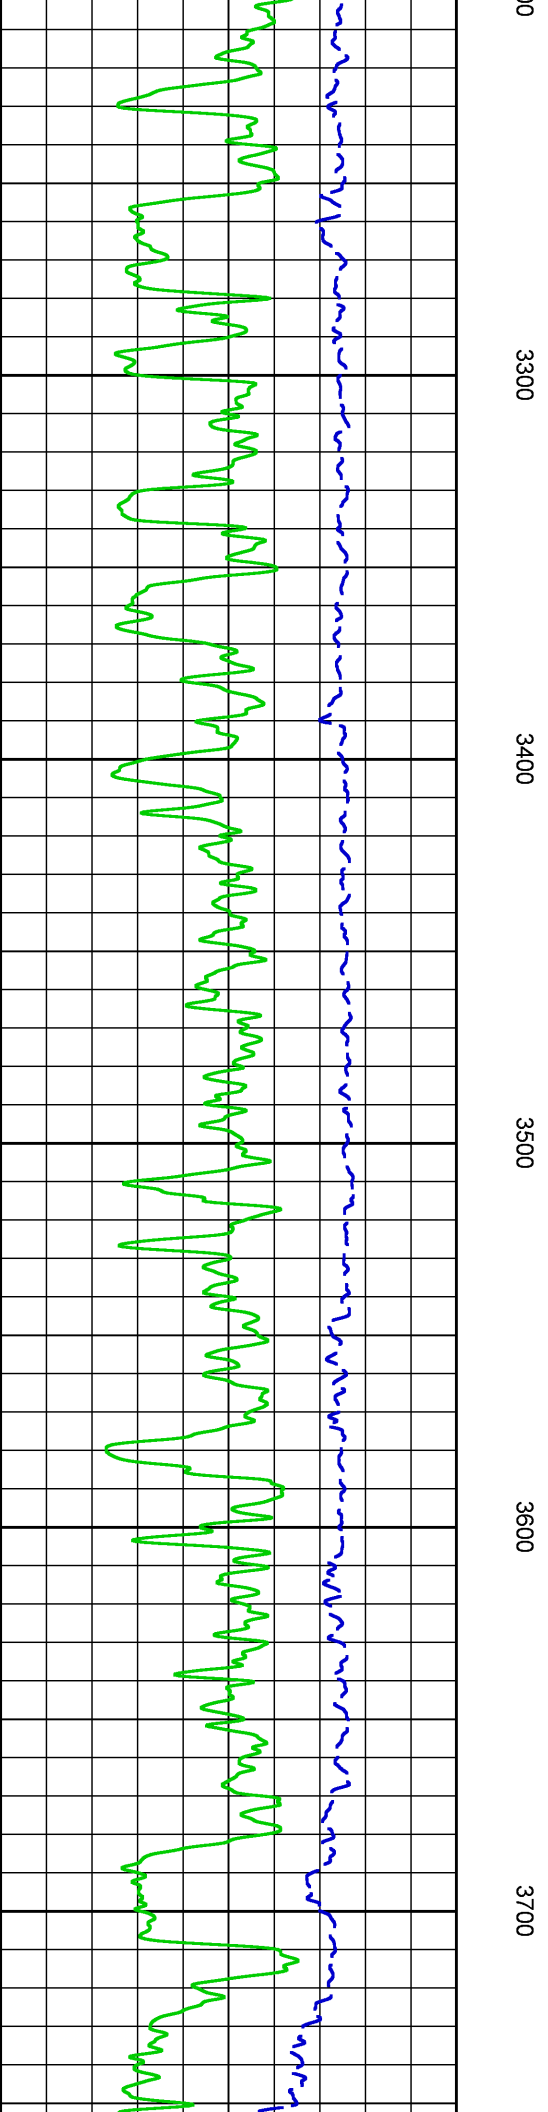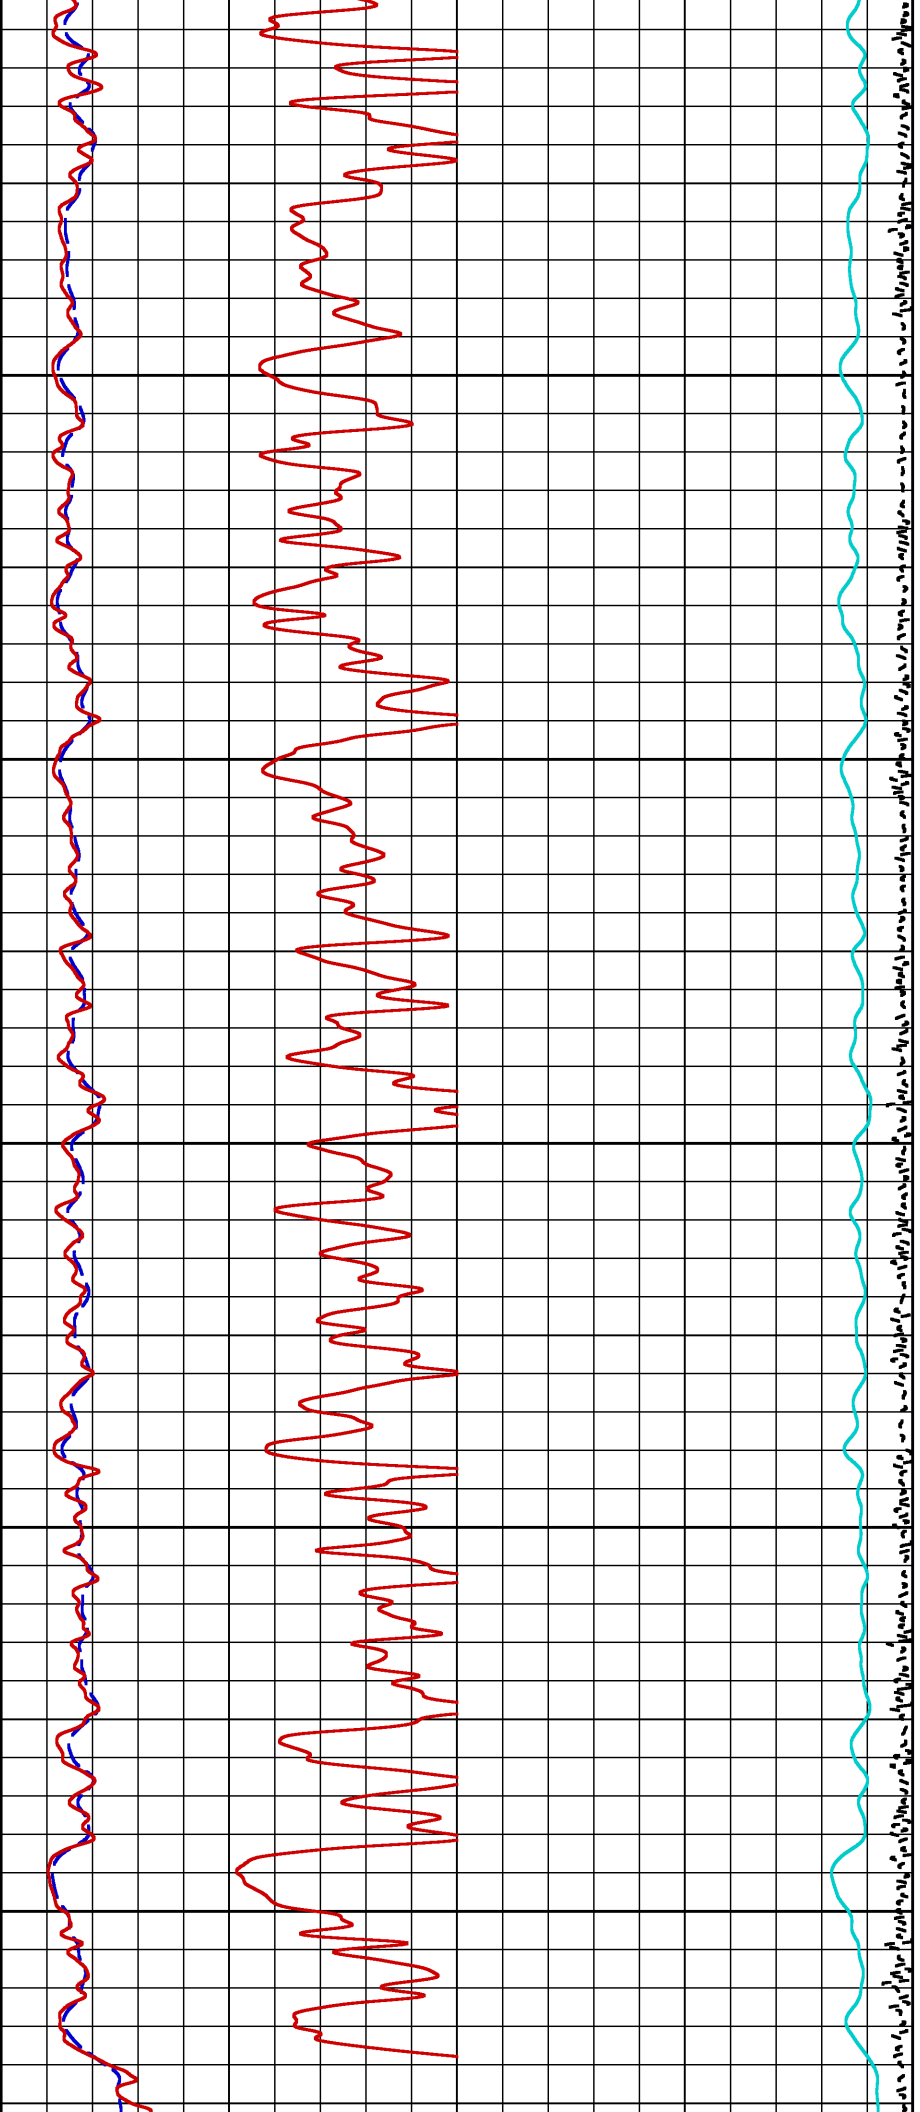

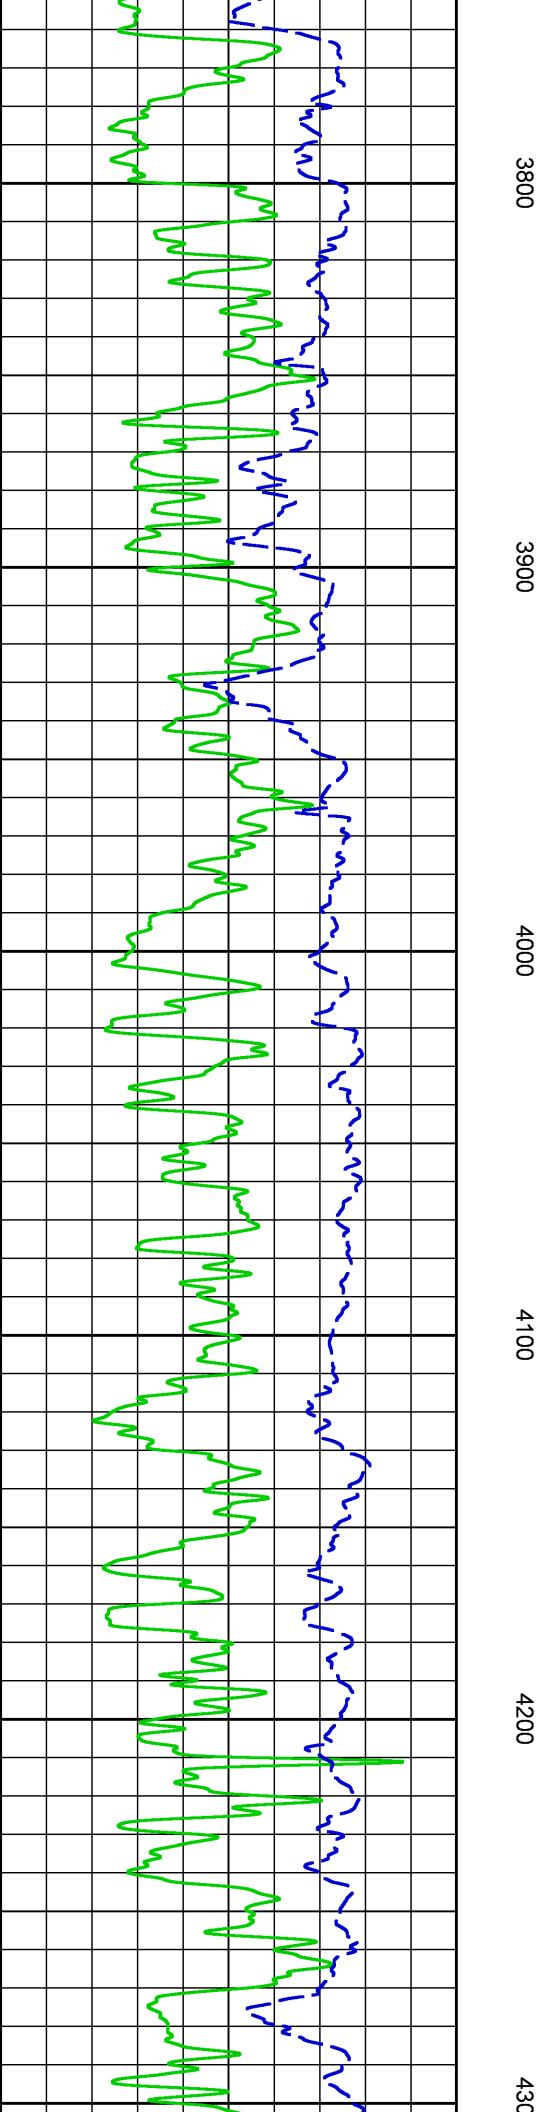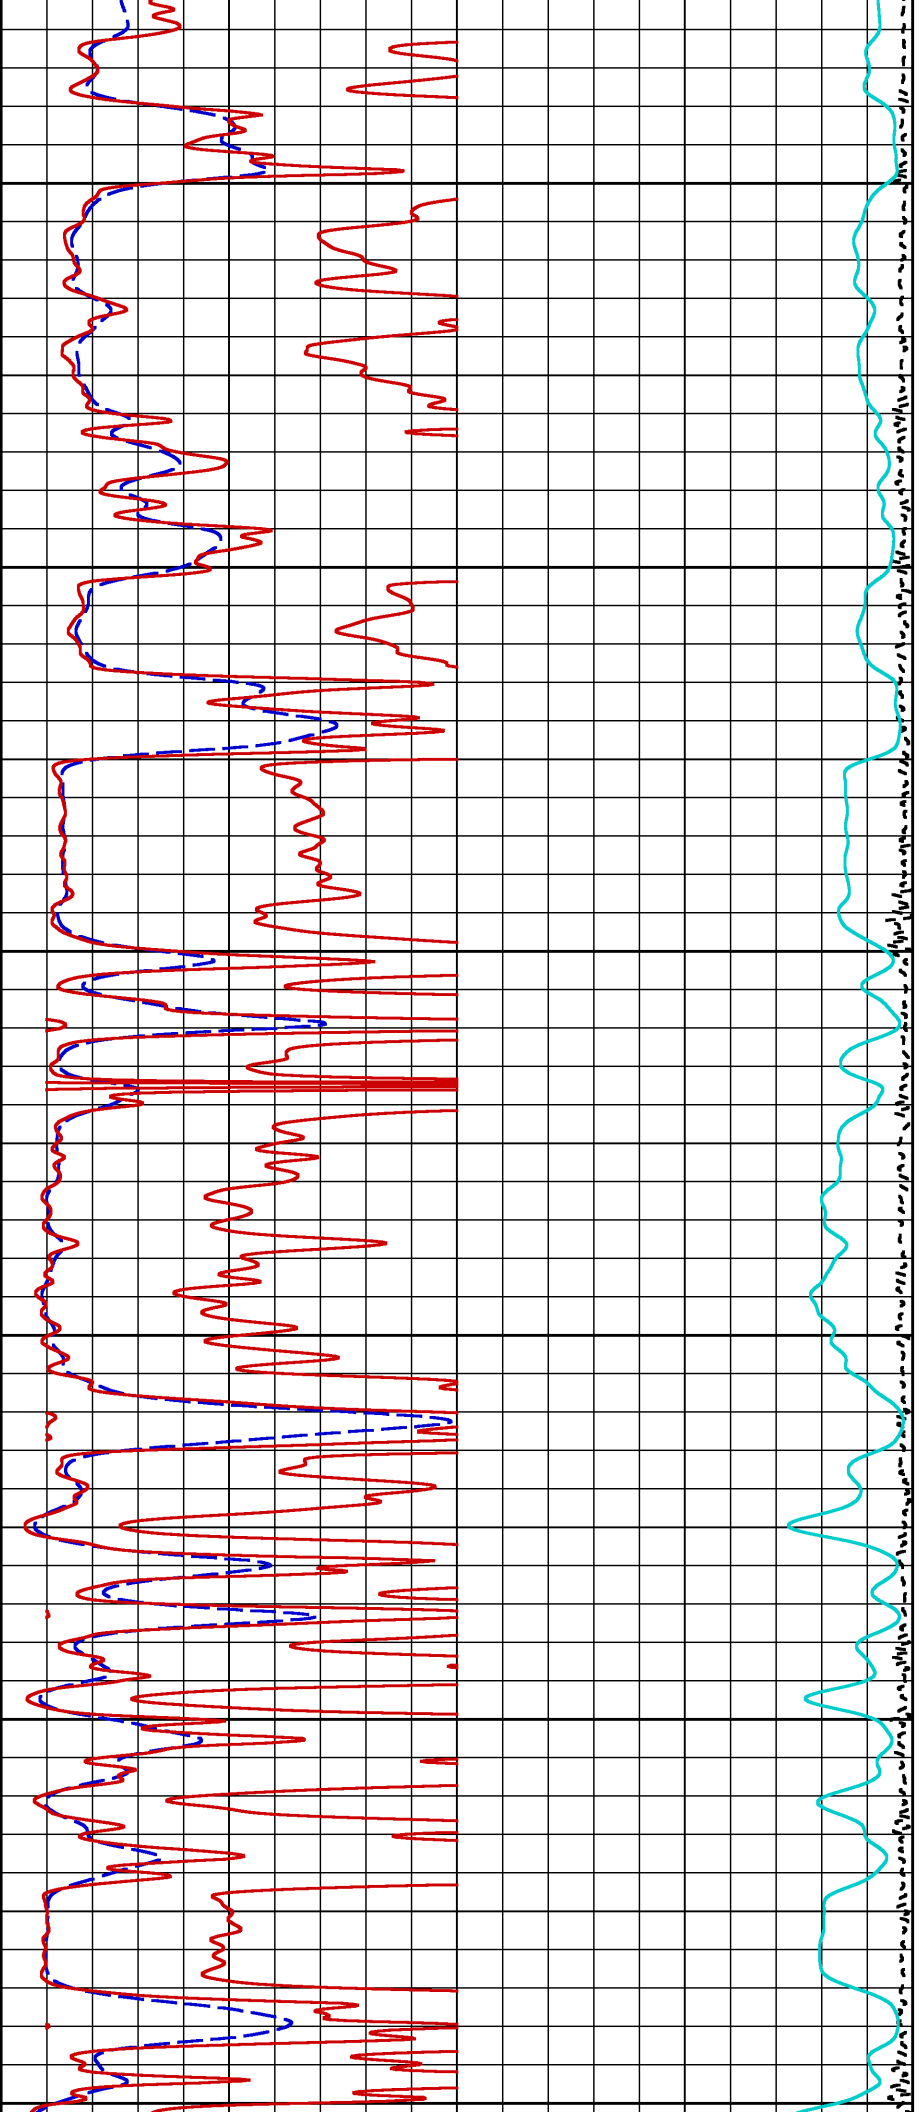

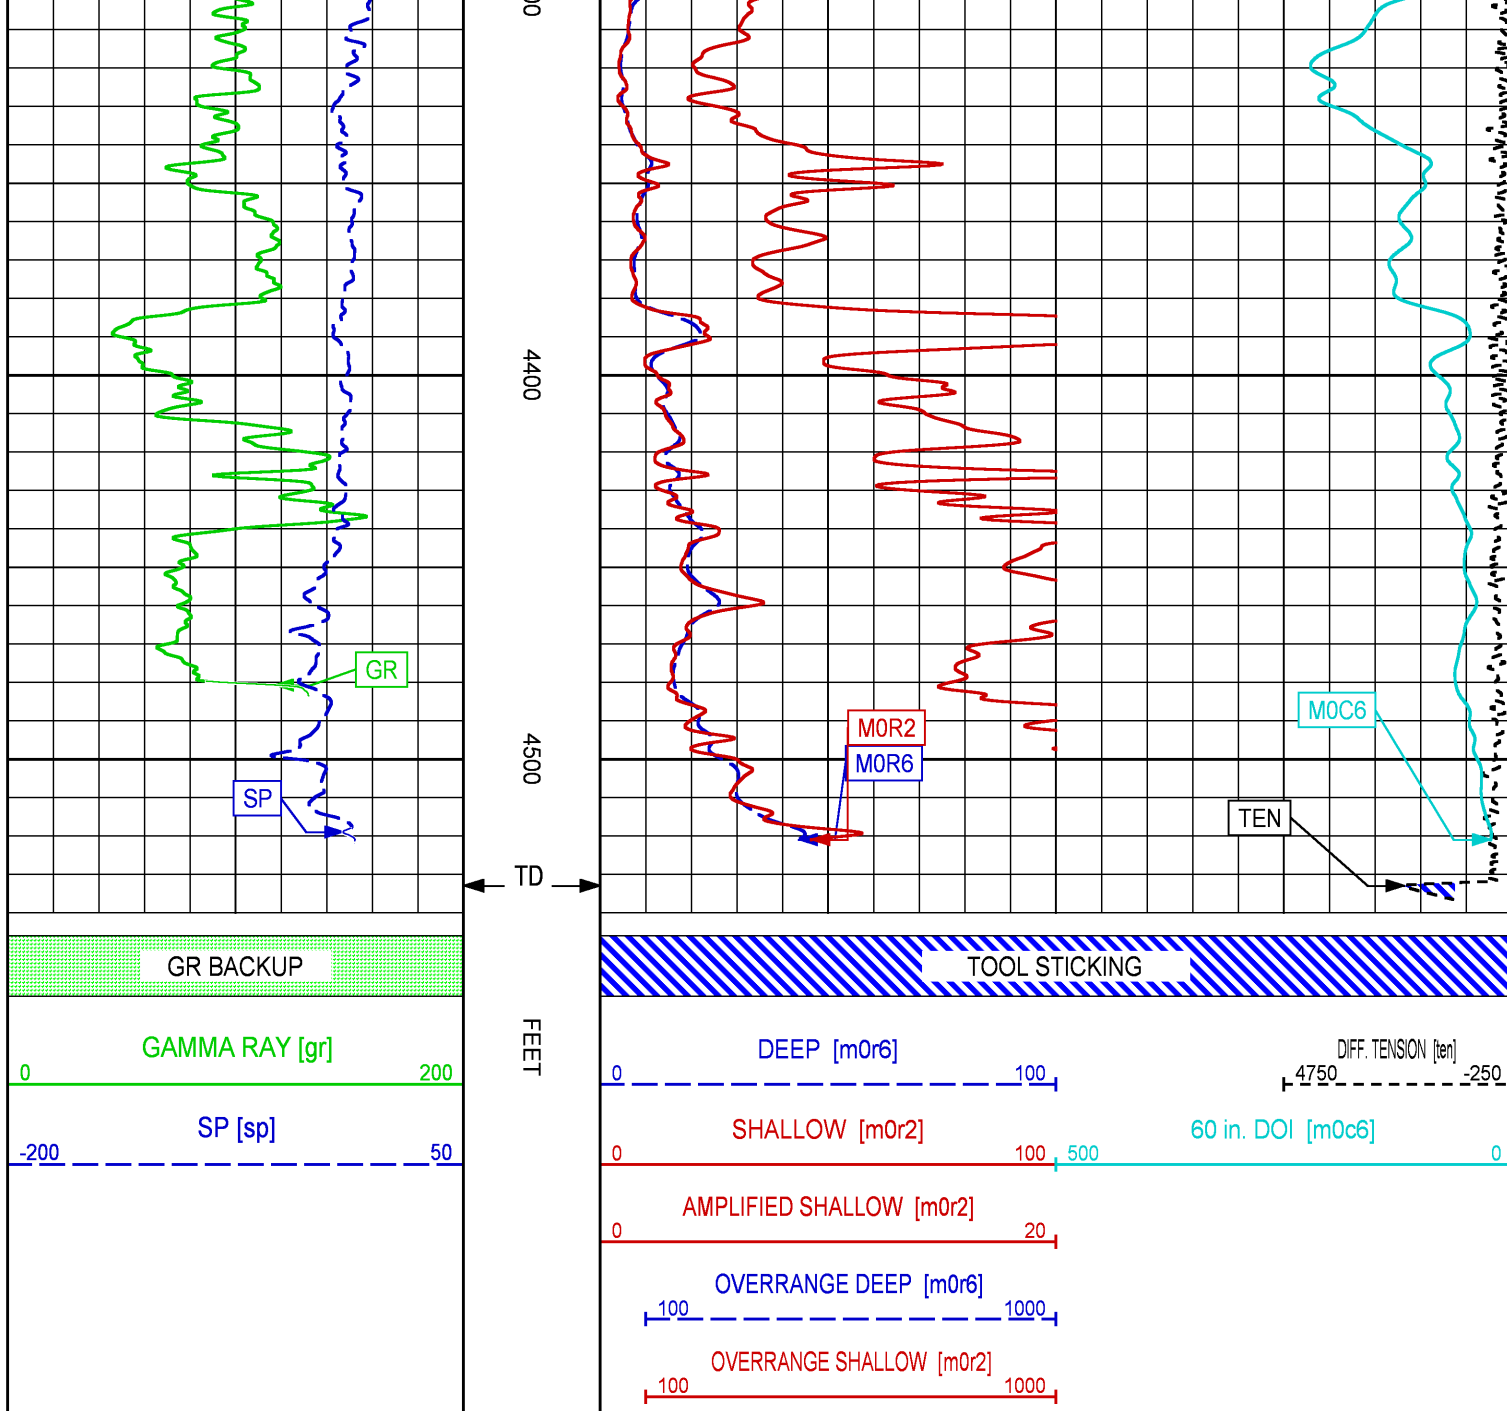

MAIN LOG 5"/100FT SCALE

ECLIPS 7.0i ECLIPS General Release Rel 7.0i Thu Jun 08 20:36:10 CDT 2017
Patches: 2

Plotted: Sat Mar 10 12:20:59 2018

PARAMETER AND FILTER SUMMARY REPORT

FILE: /dat1a/LARAMIE_NICHOLS_0994-24-11E/p777q02.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 1435.000 ft BOTTOM DEPTH: 2398.000 ft

SYMMETRIC FILTER

SYMMETRIC FILTER					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
TTRM	FILTER ()	medium (1)		TOP	BOTTOM
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	medium (1)		"	"
GR	FILTER ()	medium (1)		"	"
CN	FILTER ()	medium (1)		"	"
CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
ZDL MED RES	FILTER (hrd1*)	medium		"	"
	FILTER (hrd1s*)	medium		"	"
	FILTER (hrd2*)	medium		"	"
	FILTER (hrd2s*)	medium		"	"
	FILTER (soft*)	medium		"	"
SP-SPDH	FILTER ()	medium (1)		"	"

BOREHOLE & CEMENT					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
CASING - BOREHOLE & CEMENT VOLUME	CASING O.D.	4.500	in	TOP	BOTTOM
	CASING THICKNESS	0.000	in	"	"
BIT SIZE	BIT SIZE	7.875	in	"	"
MUD SAMPLE RESISTIVITY	MUD SAMPLE TEMP	97.3	degF	"	"
	MUD SAMPLE RES	1.000	ohm.m	"	"
BOREHOLE TEMP from GRADIENT	Known BH REF TEMP	97.3	degF	"	"
	at BH REF DEPTH	1754.0	ft	"	"
	with TEMP GRADIENT	1.200	0.01 degF/ft	"	"
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (cnbh*)	USE CALIPER		"	"
	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		"	"
BOREHOLE CORR DIAMETER	FIXED DIAMETER (cnbh*)	7.875	in	"	"
	FIXED DIAMETER (mbh*)	7.875	in	"	"
BH MUD RESISTIVITY SOURCE	RMUD SOURCE (HDIL)	TOOL MEASURED		TOP	2189.000
		MUD SAMP DERIVED		2189.000	BOTTOM

CN PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
2446 CN MATRIX	2446 MATRIX	SANDSTONE		TOP	BOTTOM
CN SALINITY CORRECTION	SALINITY CORR (2446)	SAL & BH SIZE ON		"	"
	SALINITY	800	ppm	"	"
CN TOOL STANDOFF	ENABLE STANDOFF CORR	OFF		"	"
	STANDOFF AMOUNT	0.00	in	"	"
CN CASING & CEMENT CORRECTION	CORRECTION	OFF		"	"
	BIT SIZE BEHIND CSNG	7.875	in	"	"

ZDL PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
DENSITY POROSITY	RHOmatrix	2.680	g/cm3	TOP	BOTTOM
	RHOfluid	1.000	g/cm3	"	"
ZDL	DENX TRACKING	ON		"	"
TRACKING TIME	Logging Spd for Gain	Over 10 ft/min		"	"

HDIL PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		"	"
	ABC to CALCULATE	STANDOFF		"	"
	STANDOFF	1.50	in	"	"
	TOOL POSITION	ECCENTERED		"	"
	Rmud MULTIPLIER	1.000		"	"
HDIL High RESISTIVITY Normalization	VRM Norm	ON		"	"

PARAMETER AND FILTER SUMMARY REPORT					
-------------------------------------	--	--	--	--	--

FILE:	/dat1a/LARAMIE_NICHOLS_0994-24-11E/p777q04.prm				
LOGGING MODE:	DEPTH	DIRECTION:	UP		

TOP DEPTH: 2217.250 ft

BOTTOM DEPTH: 4531.906 ft

SYMMETRIC FILTER					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
TTRM	FILTER ()	medium (1)		TOP	BOTTOM
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
TENSION	FILTER ()	light (2)		"	"
GR	FILTER ()	medium (1)		"	"
CN	FILTER ()	medium (1)		"	"
CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
ZDL MED RES	FILTER (hrd1*)	medium		"	"
	FILTER (hrd1s*)	medium		"	"
	FILTER (hrd2*)	medium		"	"
	FILTER (hrd2s*)	medium		"	"
	FILTER (soft*)	medium		"	"
SP-SPDH	FILTER ()	medium (1)		"	"

BOREHOLE & CEMENT					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
CASING - BOREHOLE & CEMENT VOLUME	CASING O.D.	4.500	in	TOP	BOTTOM
	CASING THICKNESS	0.000	in	"	"
BIT SIZE	BIT SIZE	7.875	in	"	"
MUD SAMPLE RESISTIVITY	MUD SAMPLE TEMP	97.3	degF	"	"
	MUD SAMPLE RES	1.000	ohm.m	"	"
BOREHOLE TEMP from GRADIENT	Known BH REF TEMP	97.3	degF	"	"
	at BH REF DEPTH	1754.0	ft	"	"
	with TEMP GRADIENT	1.200	0.01 degF/ft	"	"
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (cnbh*)	USE CALIPER		"	"
	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		"	"
BOREHOLE CORR DIAMETER	FIXED DIAMETER (cnbh*)	7.875	in	"	"
	FIXED DIAMETER (mbh*)	7.875	in	"	"
BH MUD RESISTIVITY SOURCE	RMUD SOURCE (HDIL)	TOOL MEASURED		"	"

CN PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
2446 CN MATRIX	2446 MATRIX	SANDSTONE		TOP	BOTTOM
CN SALINITY CORRECTION	SALINITY CORR (2446)	SAL & BH SIZE ON		"	"
	SALINITY	800	ppm	"	"
CN TOOL STANDOFF	ENABLE STANDOFF CORR	OFF		"	"
	STANDOFF AMOUNT	0.00	in	"	"
CN CASING & CEMENT CORRECTION	CORRECTION	OFF		"	"
	BIT SIZE BEHIND CSNG	7.875	in	"	"

ZDL PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
DENSITY POROSITY	RHOmatrix	2.680	g/cm3	TOP	BOTTOM
	RHOfluid	1.000	g/cm3	"	"
ZDL	DENX TRACKING	ON		"	"
TRACKING TIME	Logging Spd for Gain	Over 10 ft/min		"	"

HDIL PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
HDIL TEMPERATURE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
ADAPTIVE BOREHOLE CORRECTION	ABC PROCESSING	ON		"	"
	ABC to CALCULATE	STANDOFF		"	"
	STANDOFF	1.50	in	"	"
	TOOL POSITION	ECCENTERED		"	"
	Rmud MULTIPLIER	1.000		"	"
HDIL High RESISTIVITY Normalization	VRM Norm	ON		"	"

CURVE DESCRIPTION REPORT					
CURVE NAME	CREATION DATE	CURVE DESCRIPTION			


CURVE NAME	CREATION DATE	CURVE DESCRIPTION
F1:BIT	N/A	BIT SIZE
F1:BVOL	N/A	BOREHOLE VOLUME
F1:CAL	N/A	CALIPER
F1:CNCF	N/A	FIELD NORMALIZED COMPENSATED NEUTRON POROSITY
F1:CVOL	N/A	CEMENT VOLUME
F1:GR	N/A	GAMMA RAY
F1:M2R1	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 10-INCH DOI
F1:M2R2	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 20-INCH DOI
F1:M2R3	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 30-INCH DOI
F1:M2R6	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 60-INCH DOI
F1:M2R9	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 90-INCH DOI
F1:M2RX	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 120-INCH DOI
F1:PE	N/A	PHOTO ELECTRIC CROSS-SECTION
F1:PORZ	N/A	POROSITY FOR SELECTABLE MATRIX
F1:SP	N/A	SPONTANEOUS POTENTIAL
F1:TEN	N/A	DIFFERENTIAL TENSION
F1:ZCOR	N/A	DENSITY CORRECTION


CURVE MEASURE POINT OFFSET

CURVE	OFFSET (ft)	CURVE	OFFSET (ft)	CURVE	OFFSET (ft)	CURVE	OFFSET (ft)
BIT	0.00	M2R1	-8.00	M2R9	-8.00	SP	-14.00
CAL	-35.00	M2R2	-8.00	M2RX	-8.00	TEN	0.00
CNCF	-45.25	M2R3	-8.00	PE	-34.25	ZCOR	-34.25
GR	-52.25	M2R6	-8.00	PORZ	-34.25		

Presentation : SysA:/dat1a/LARAMIE_NICHOLS_0994-24-11E/LARAMIE_MAIN.fvpdf [5"/100' Scale]
Plot Interval : -16.5 - 4537.75 Feet


Data File 1 : F1 : SysA:/dat1a/LARAMIE_NICHOLS_0994-24-11E/p777qMAINSPL.xtf
Created On : N/A
Company : LARAMIE ENERGY II LLC
Well : NICHOLS 0994-24-11E
Field : VEGA
File Interval : -16.5 - 4537.75 Feet
OCT : p777q


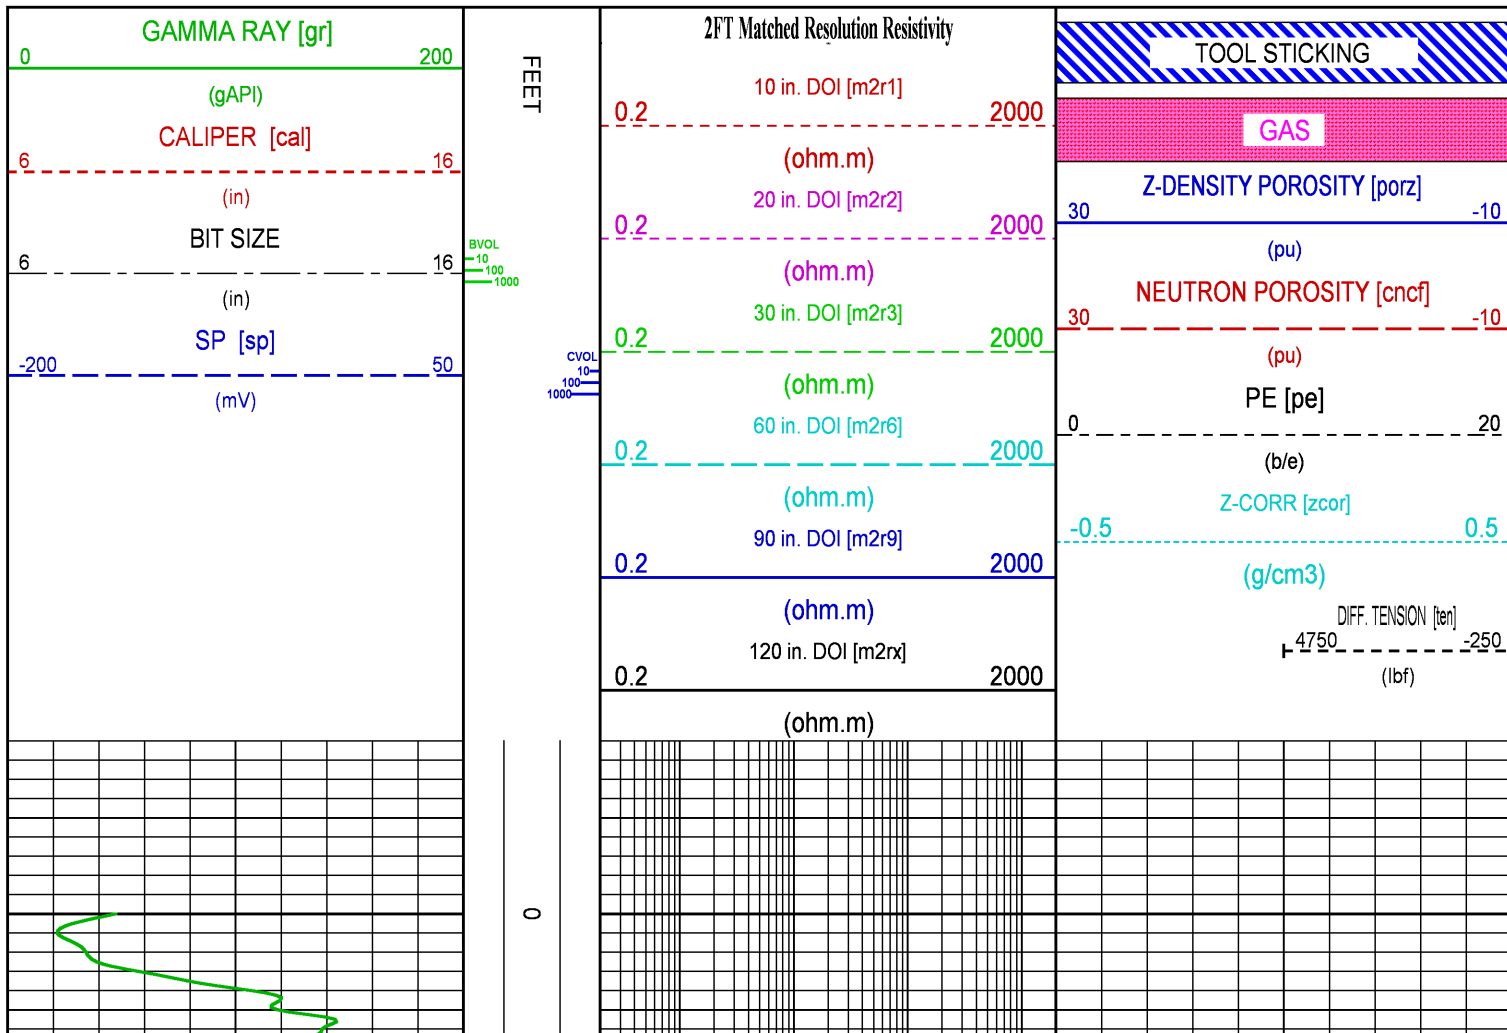


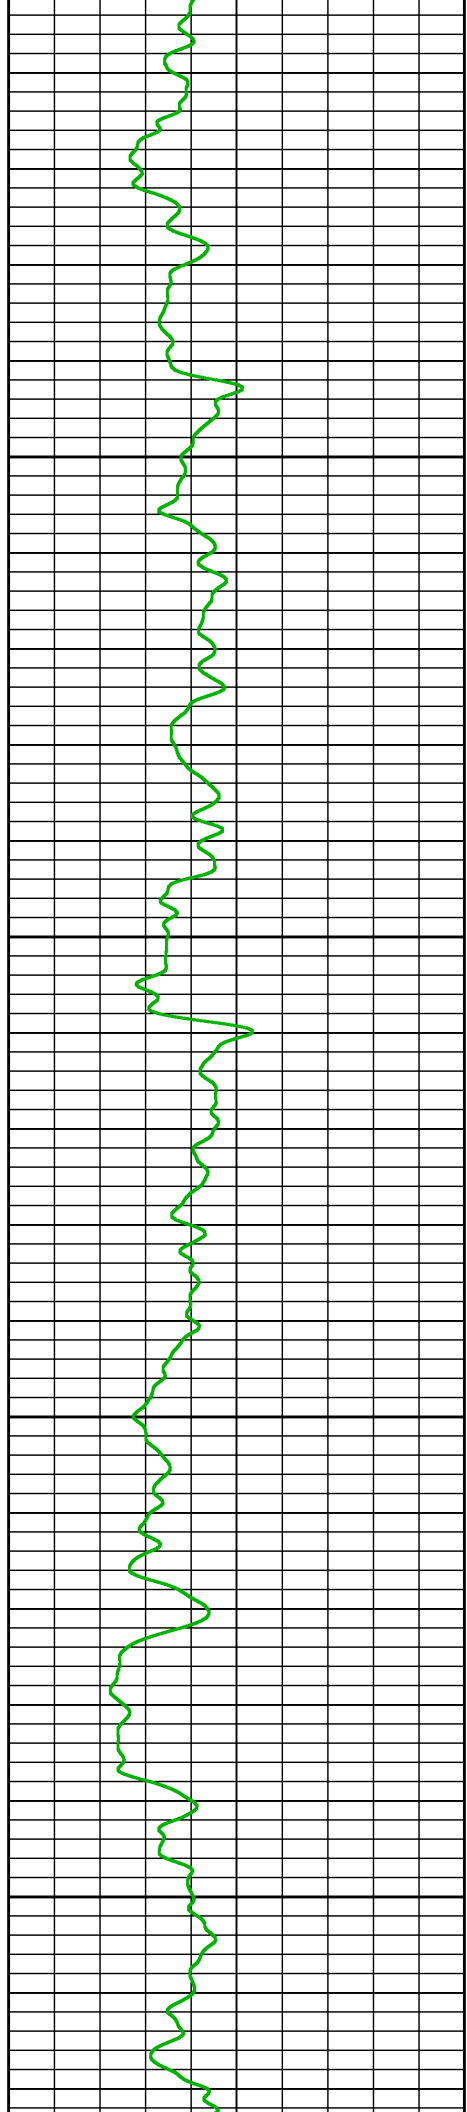


500

600

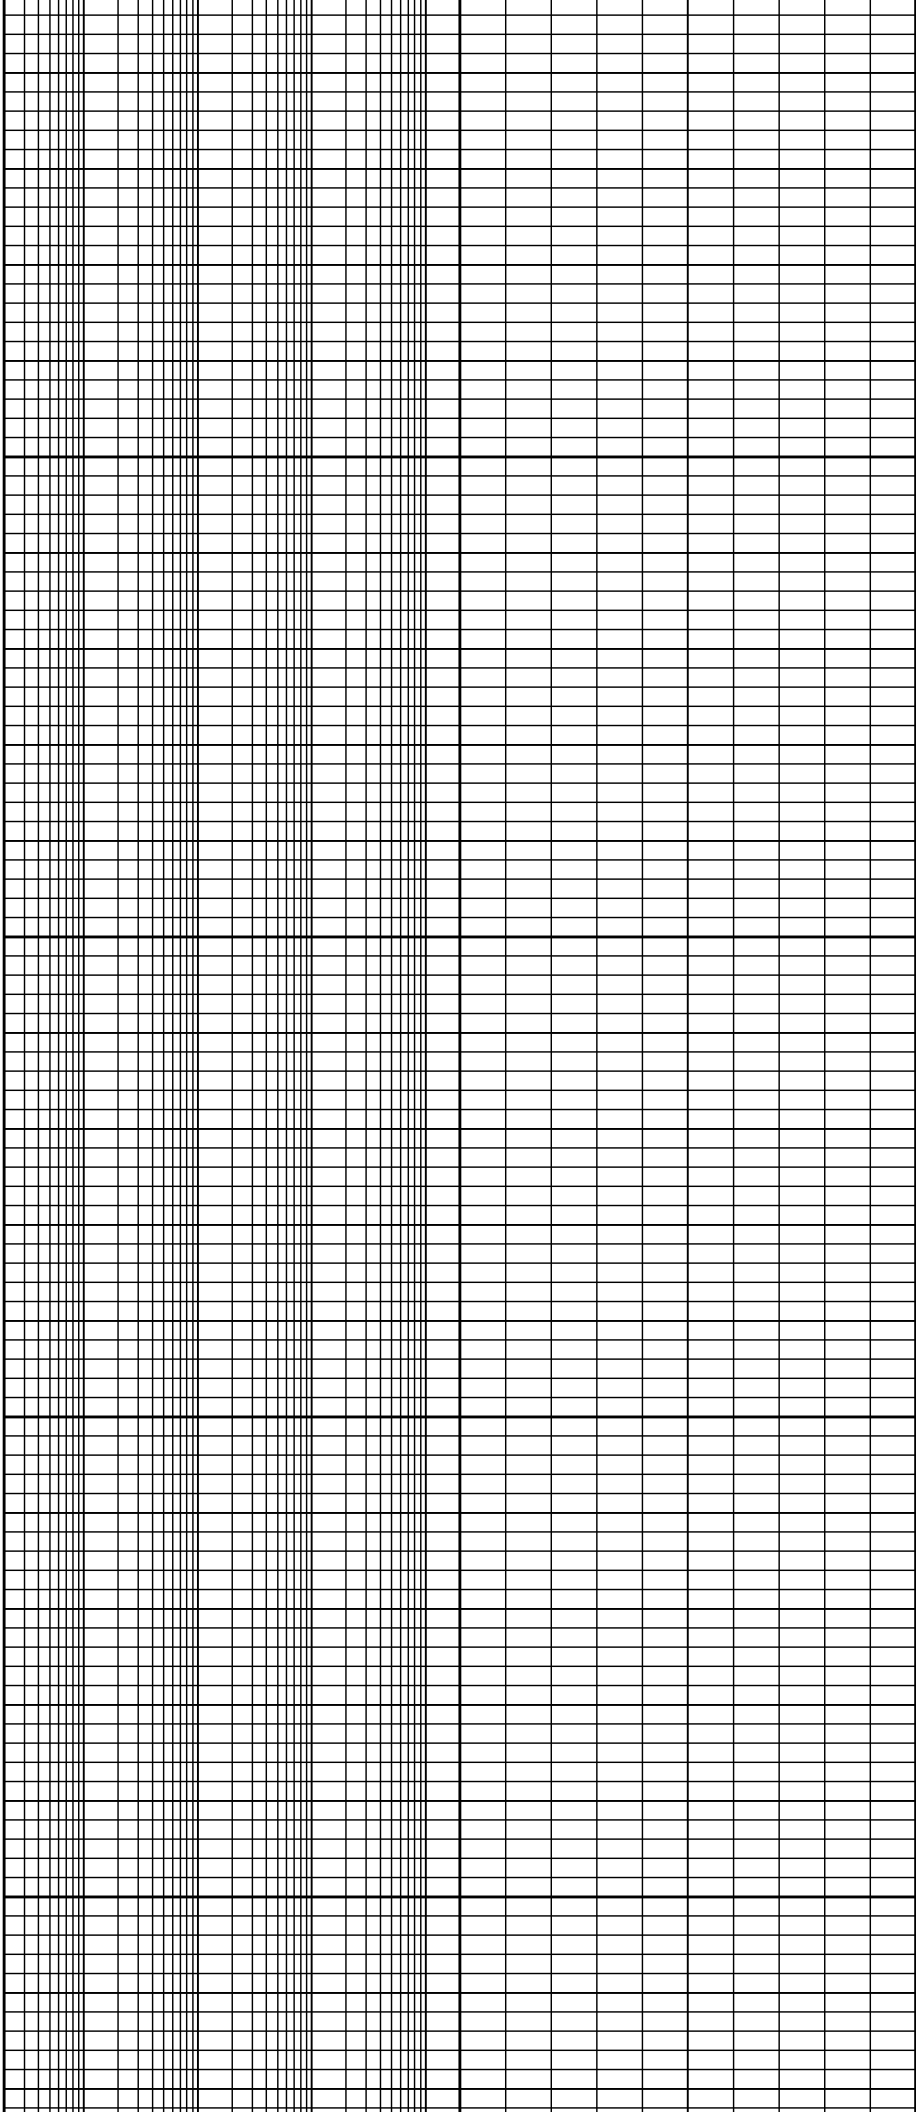

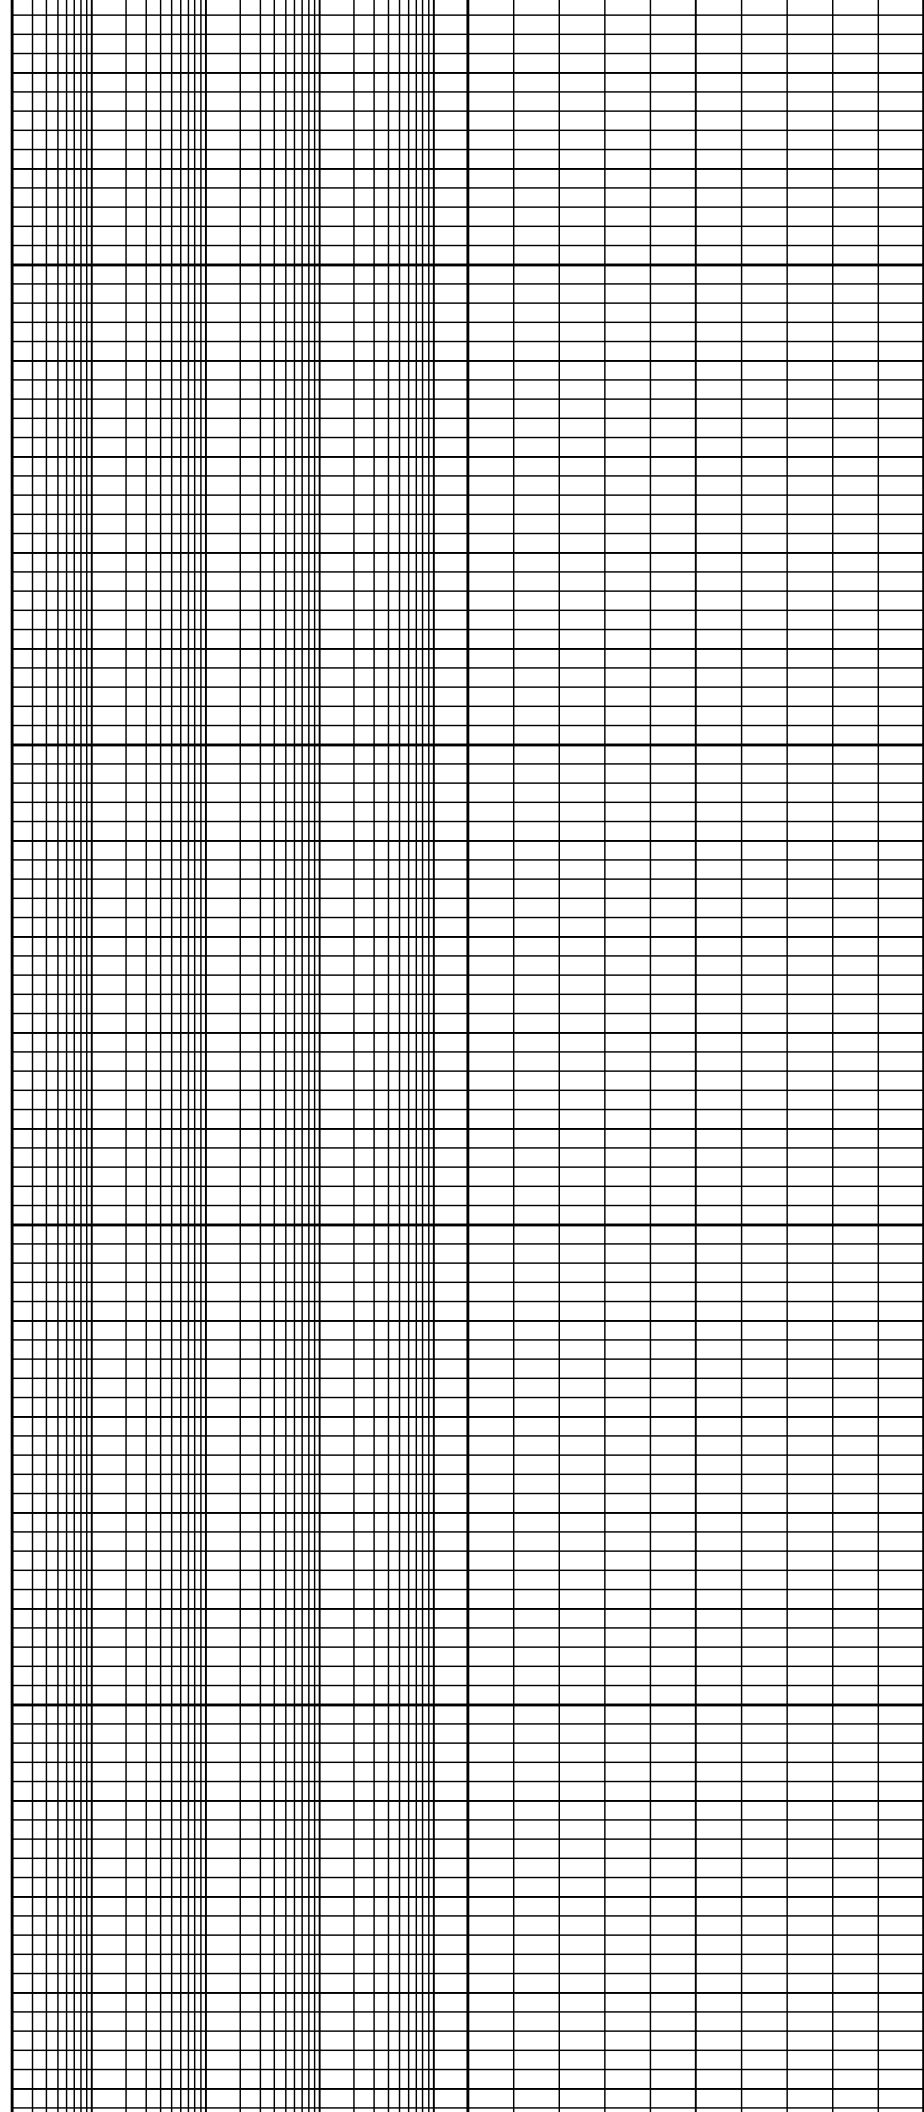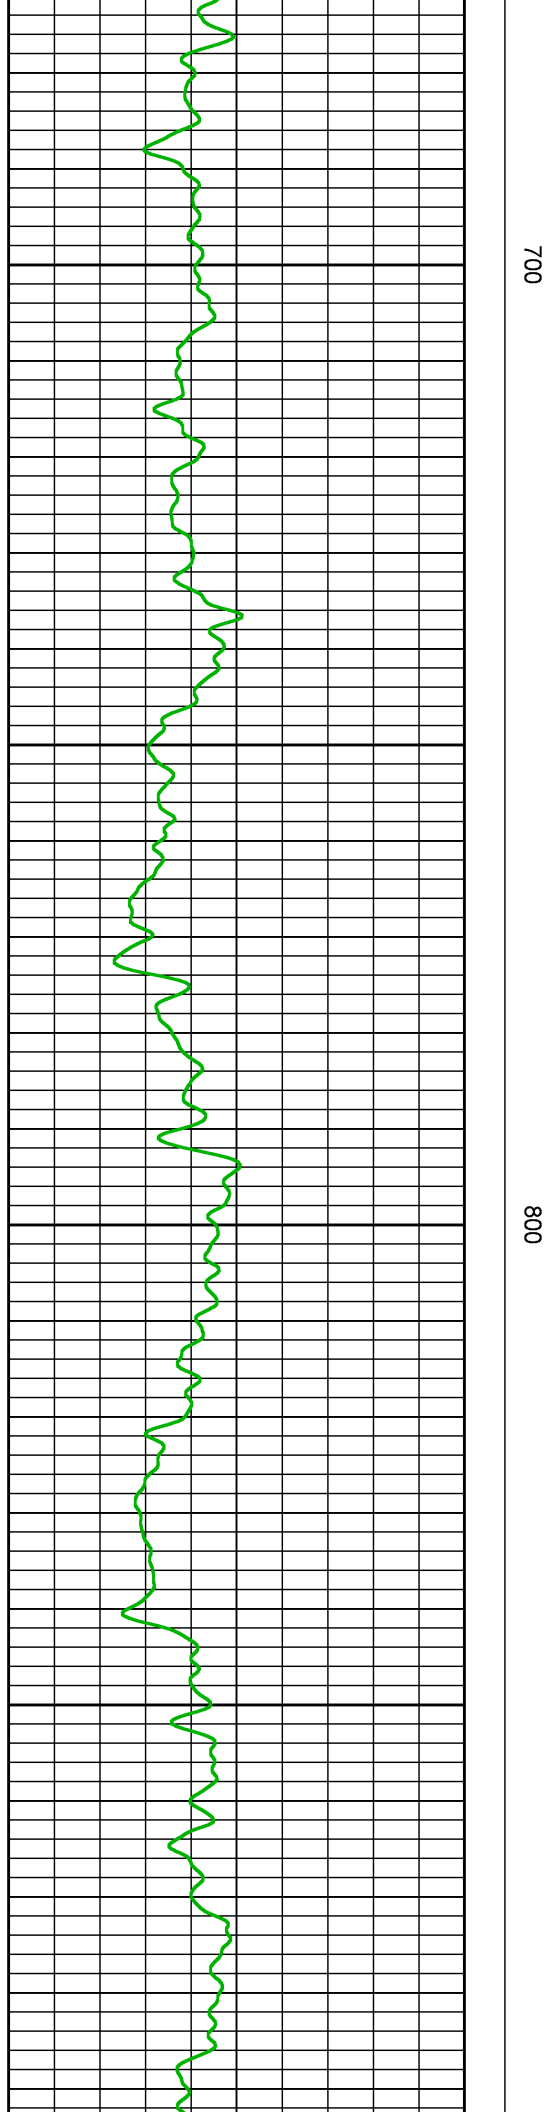


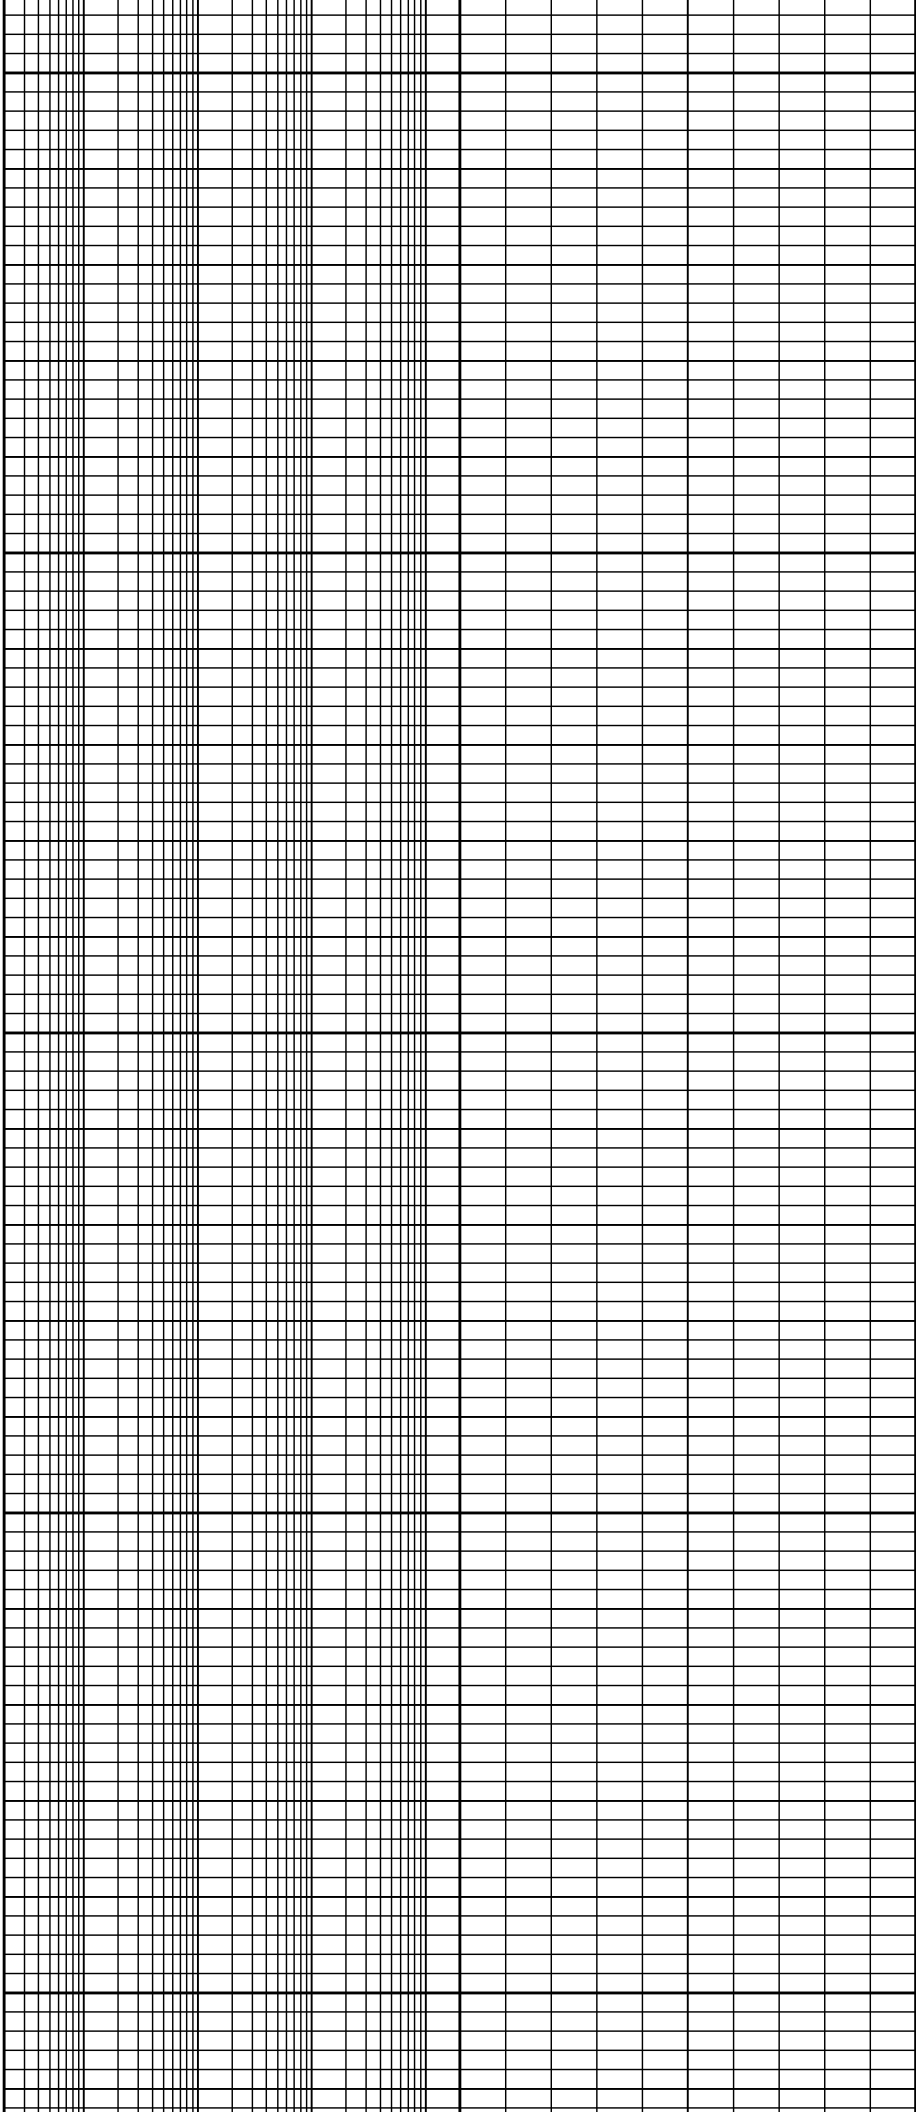


900

1000


1100

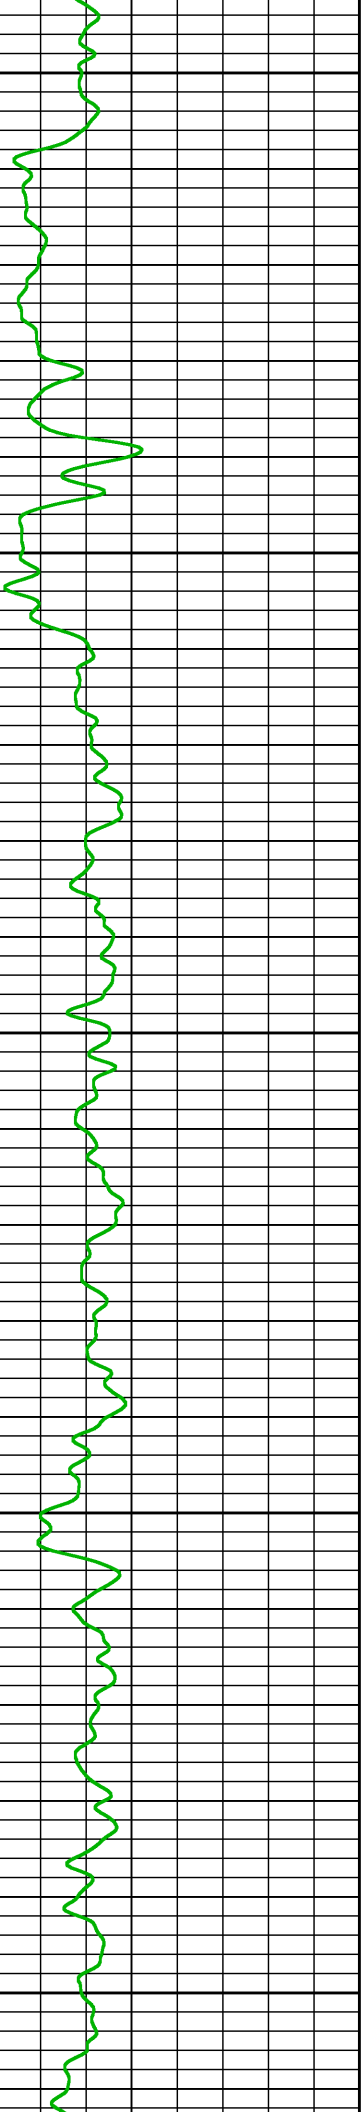



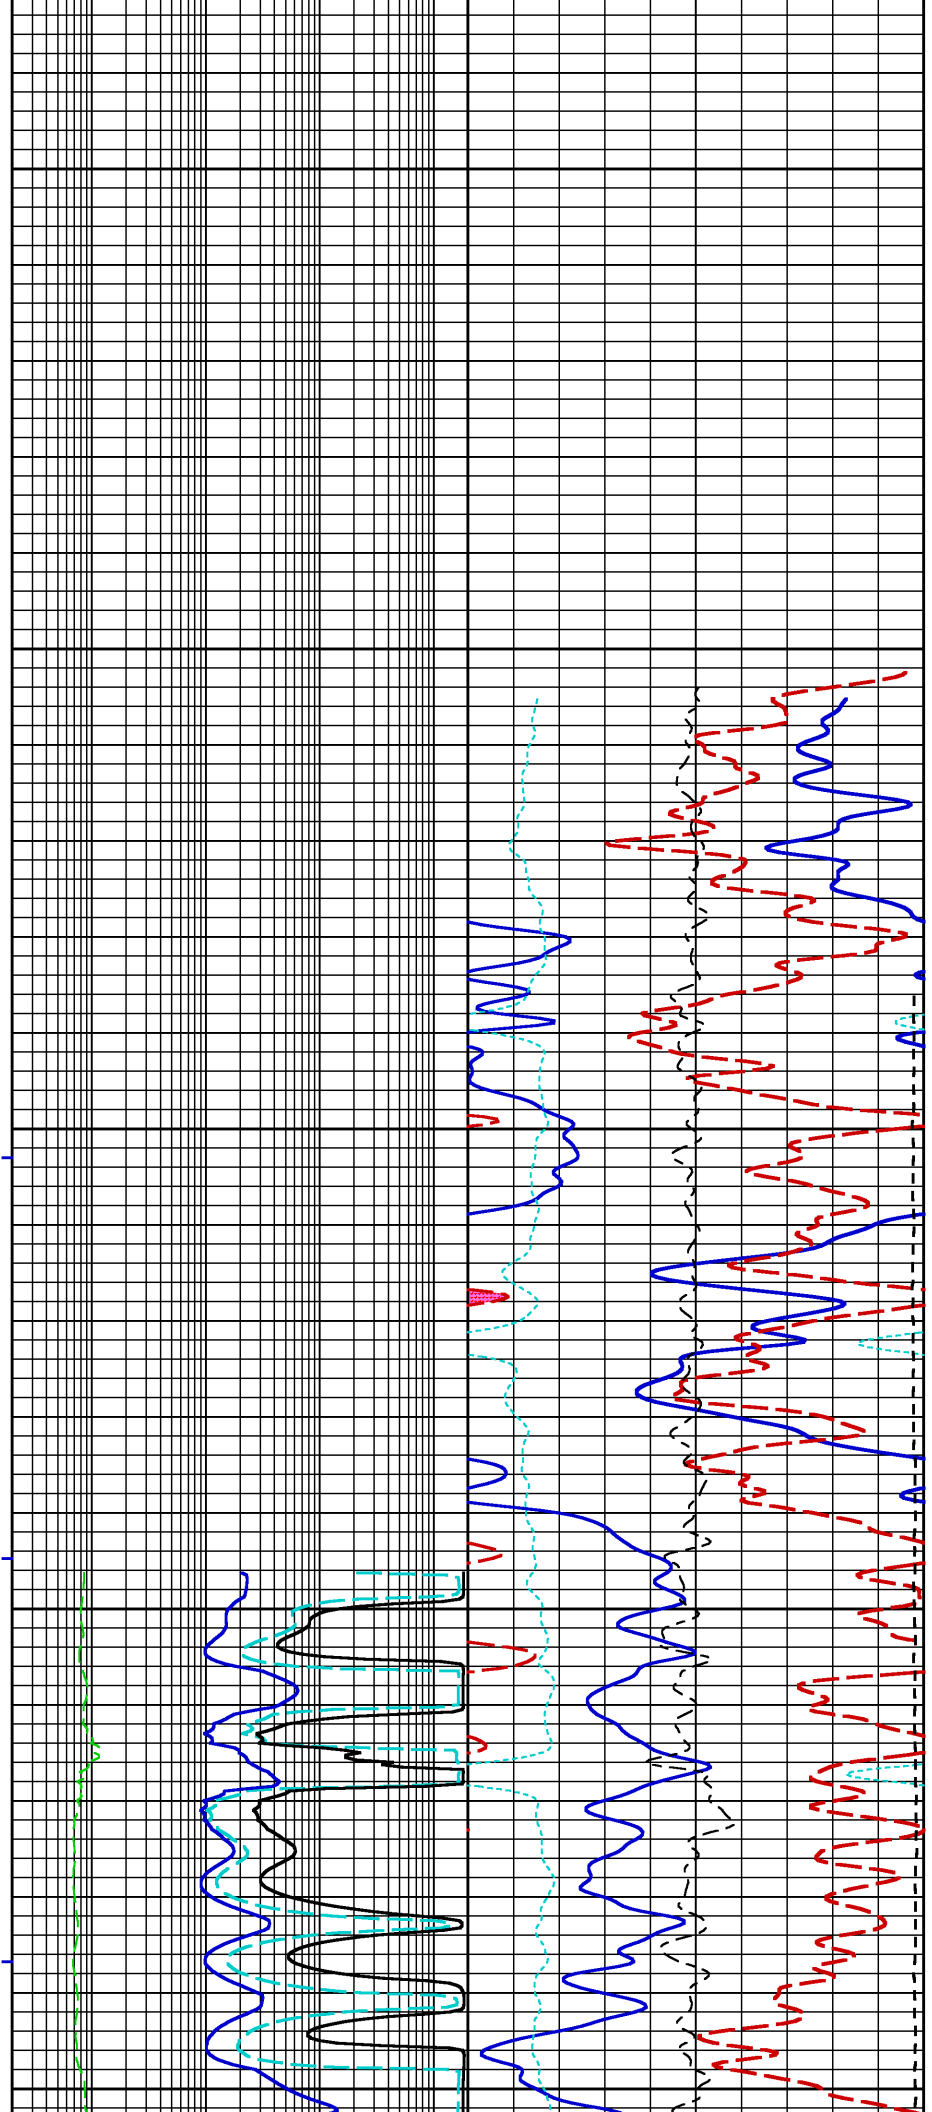




1400




1500

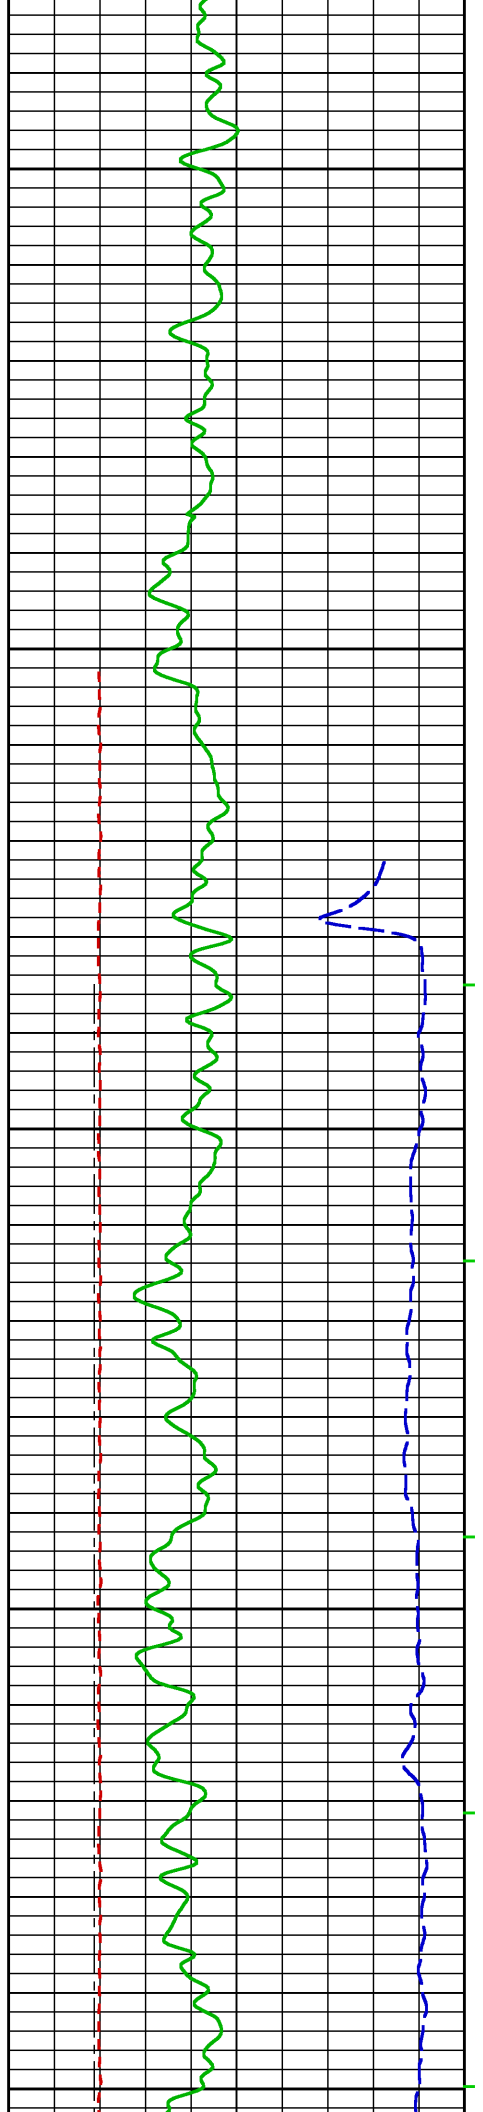



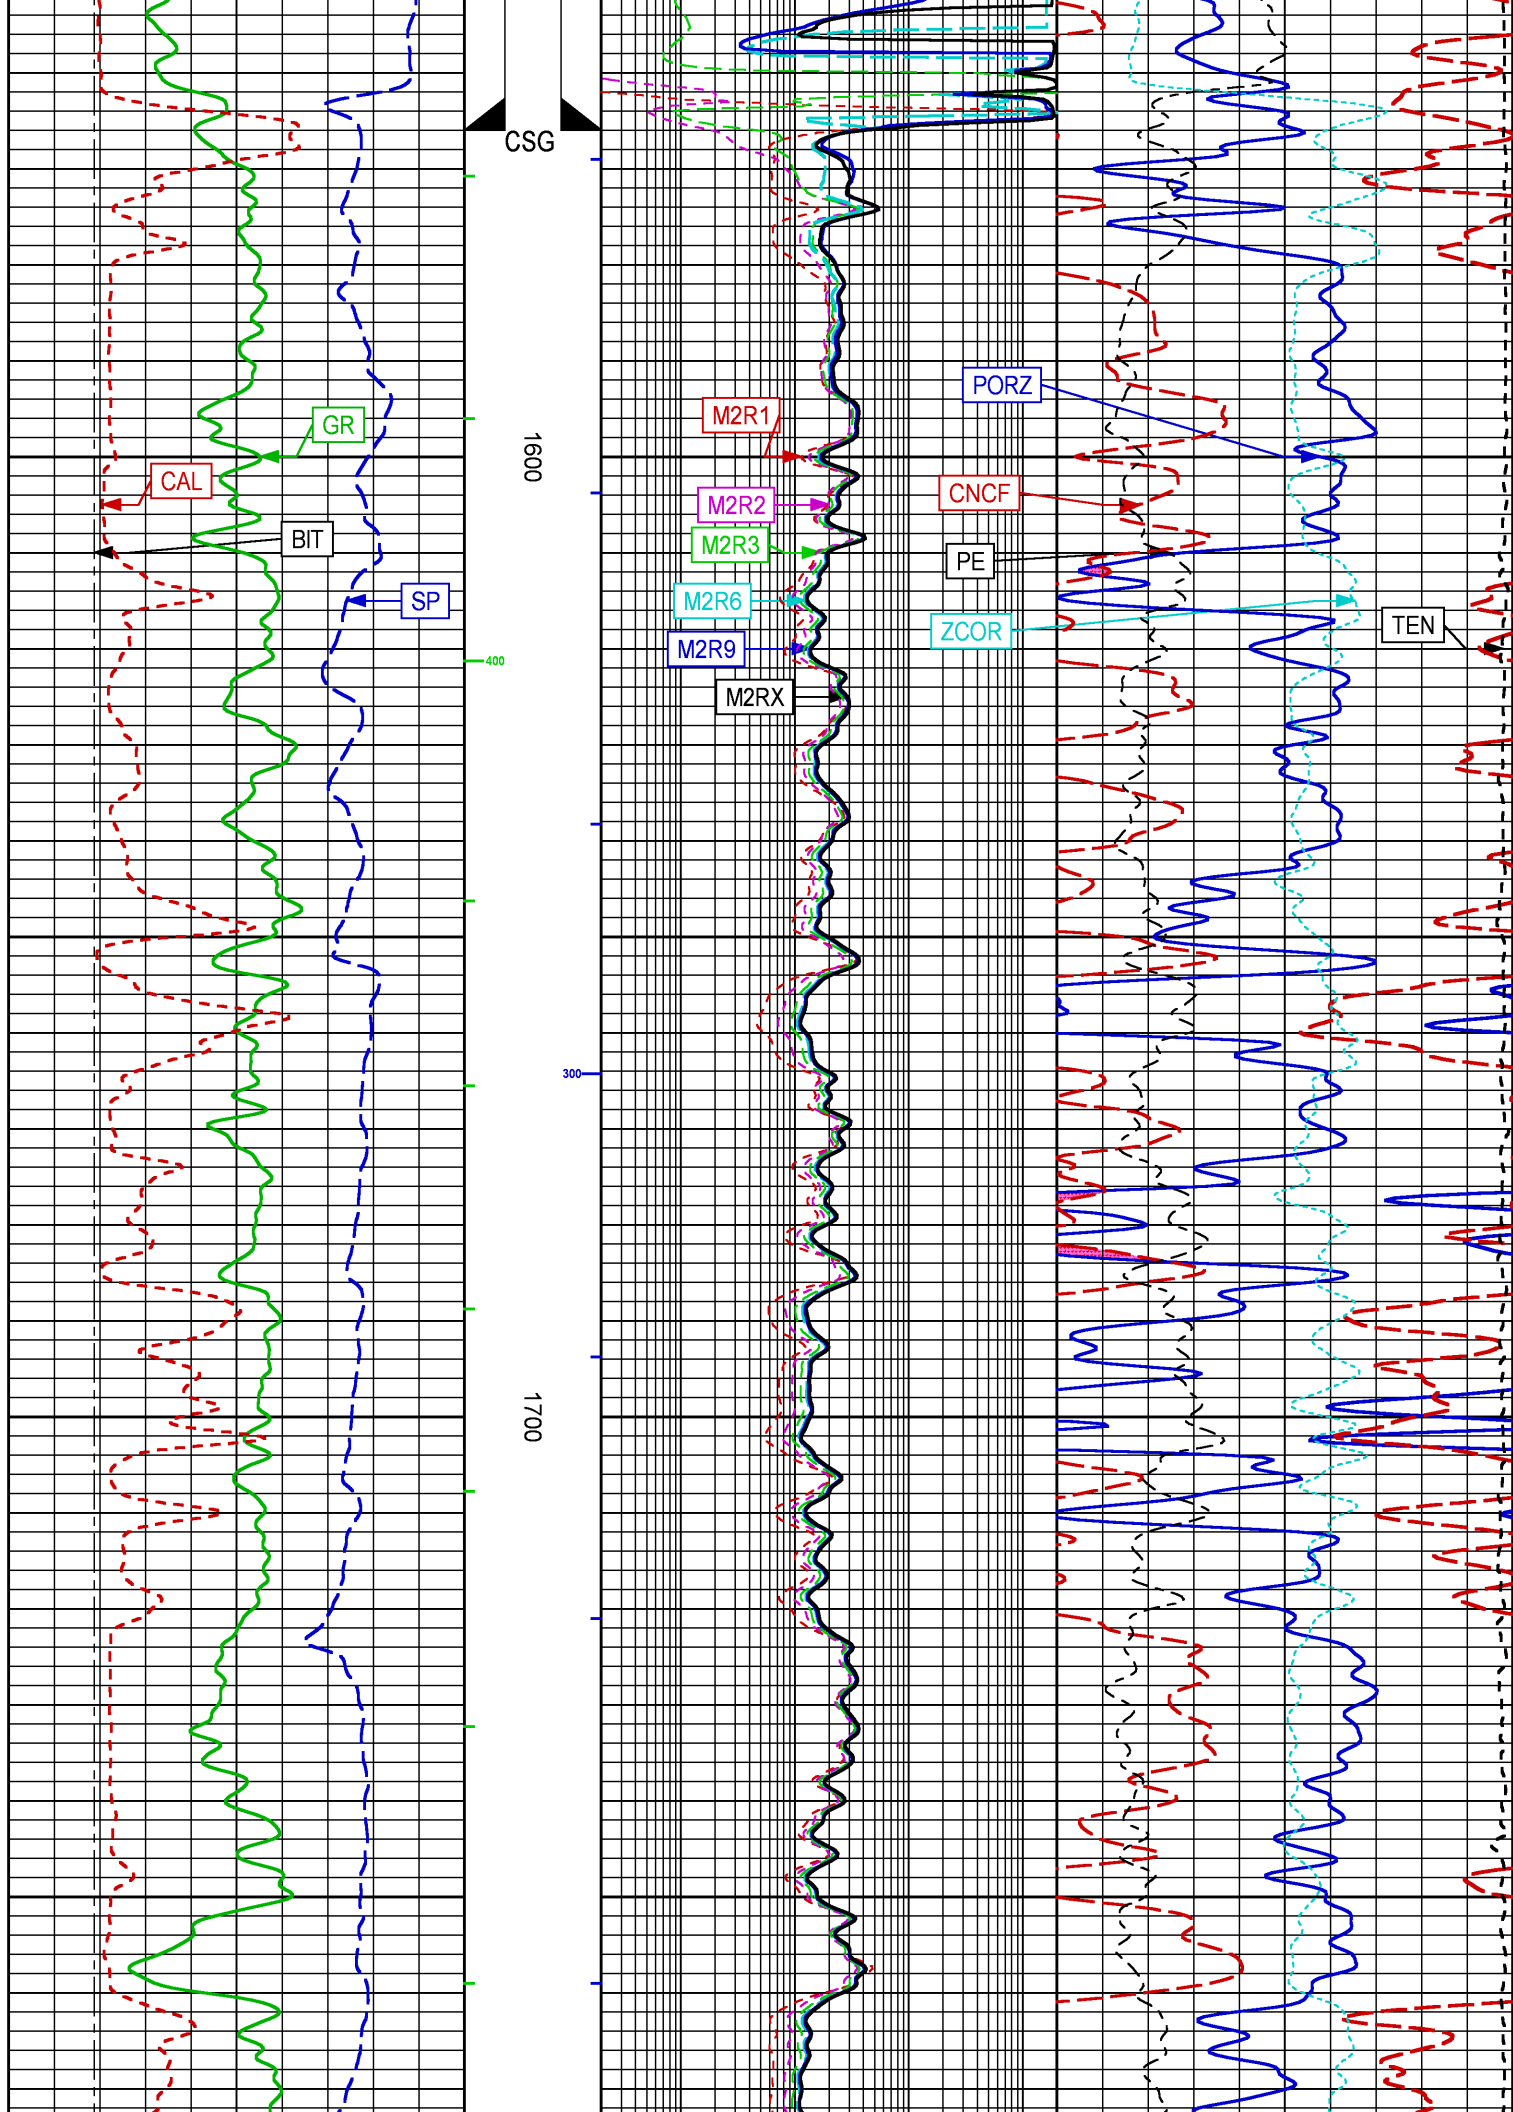


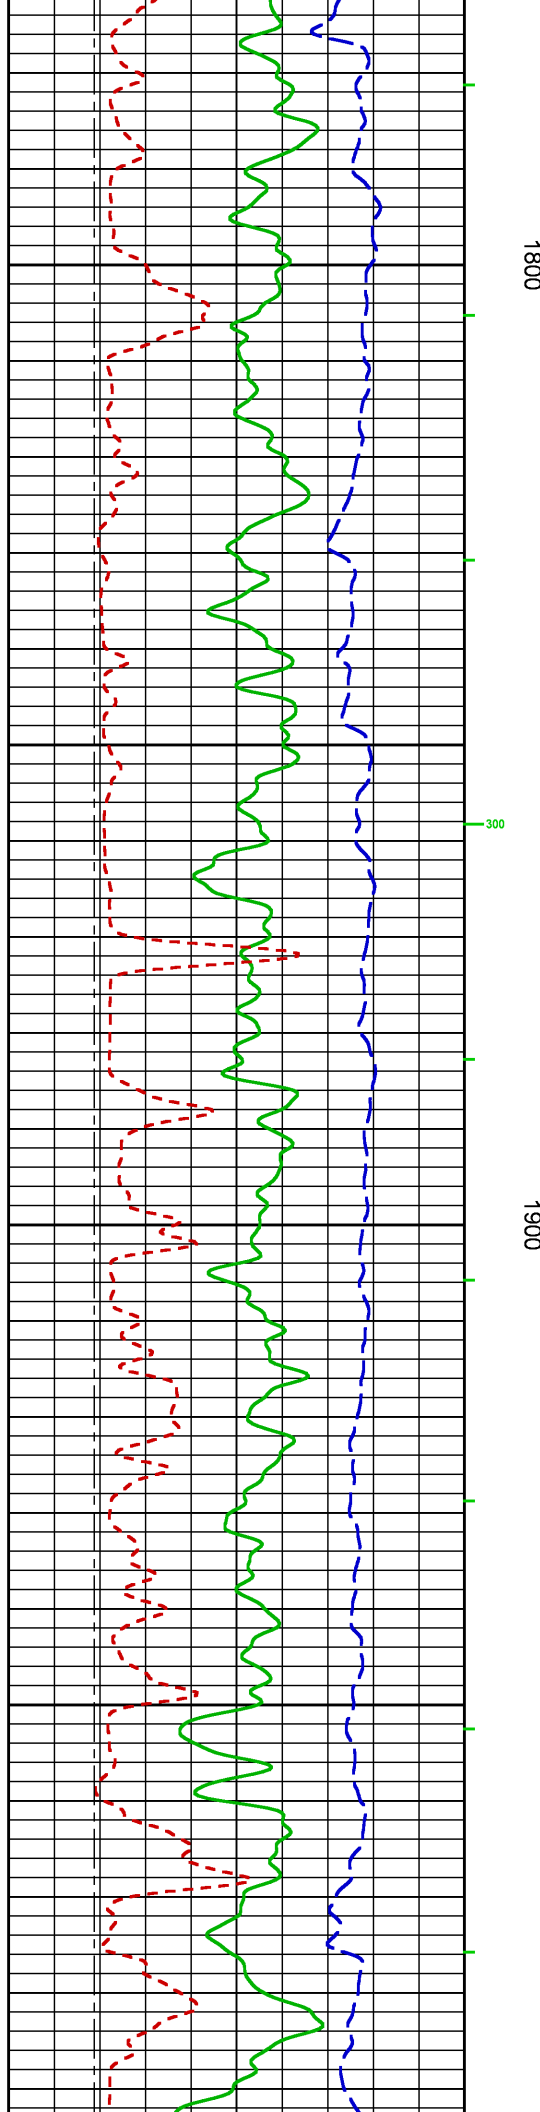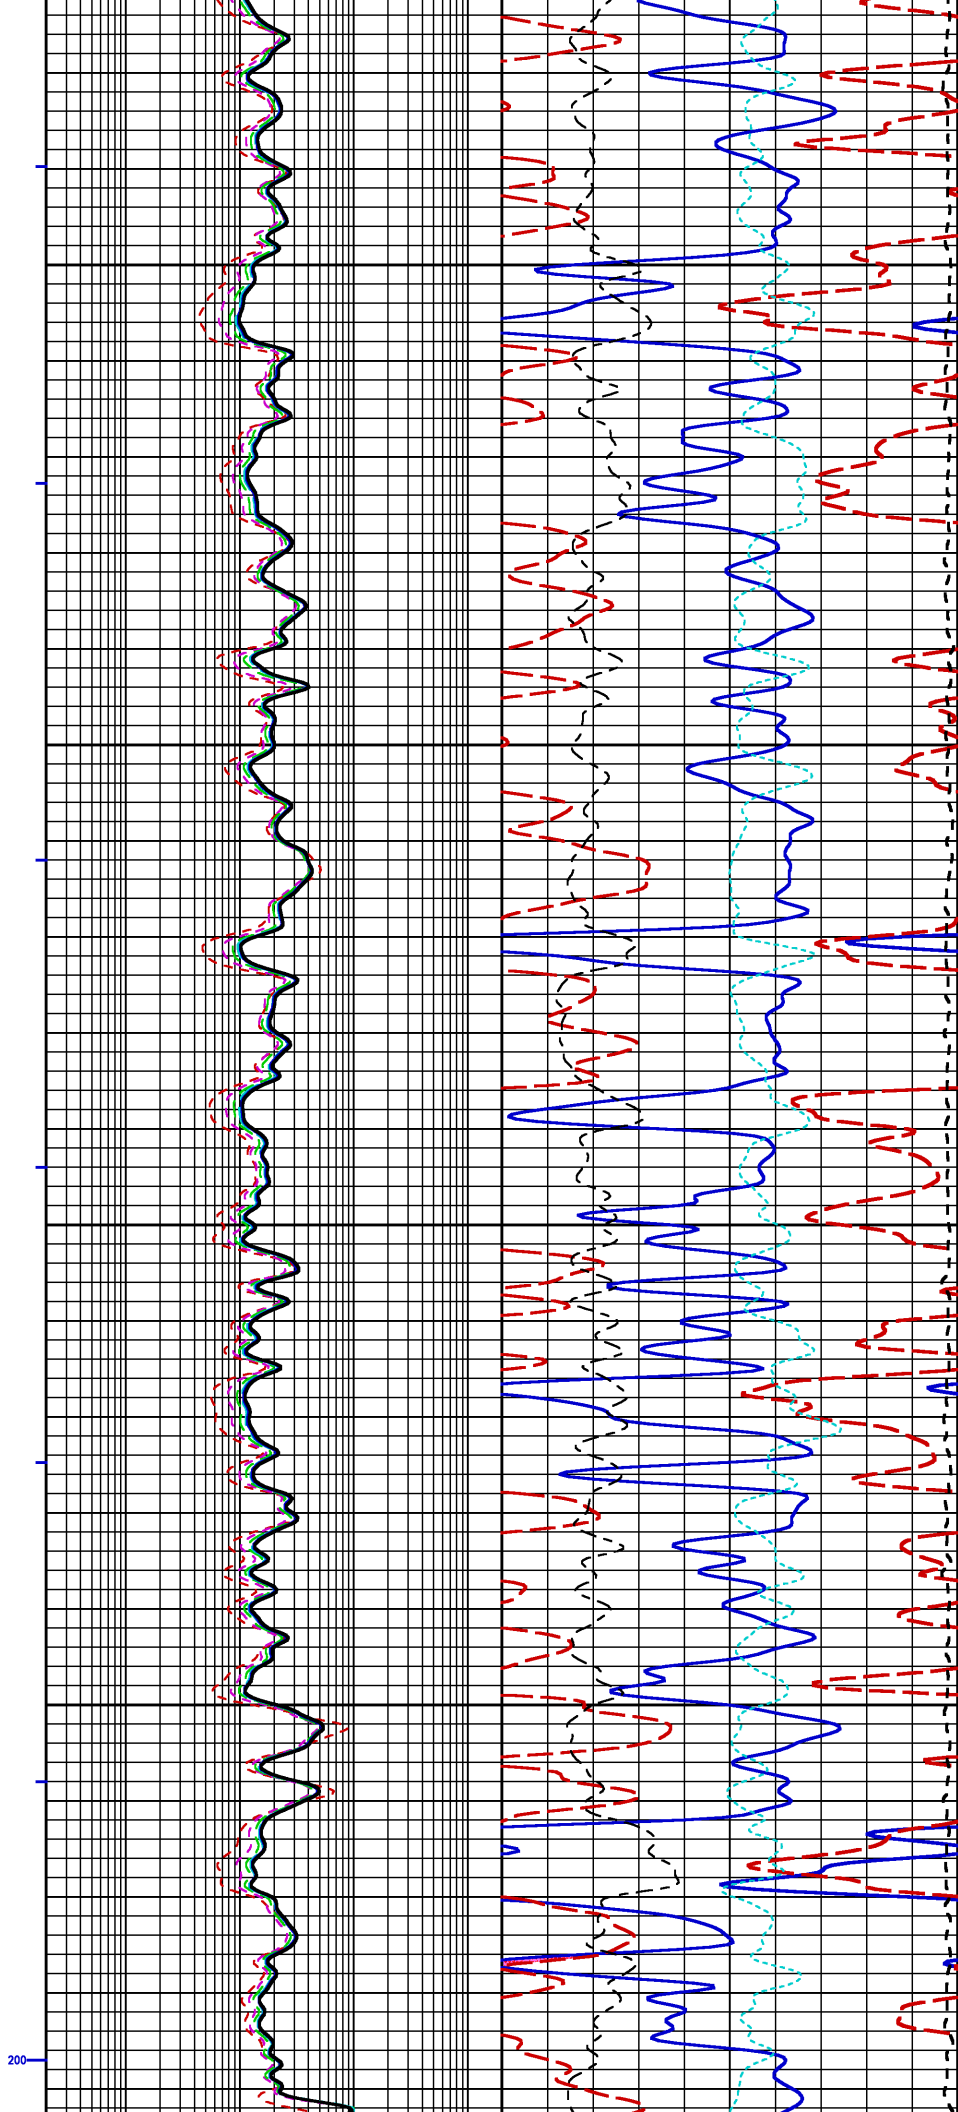


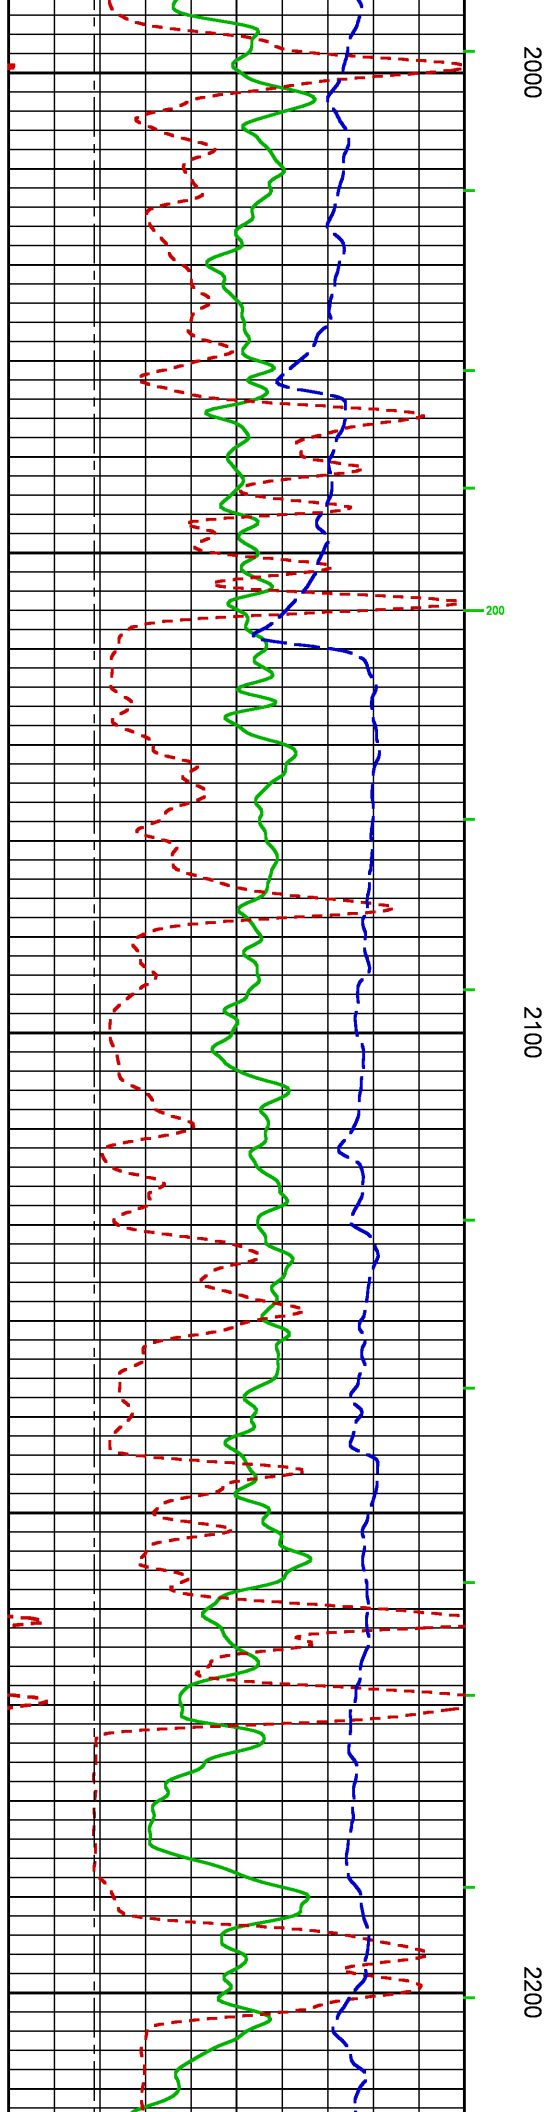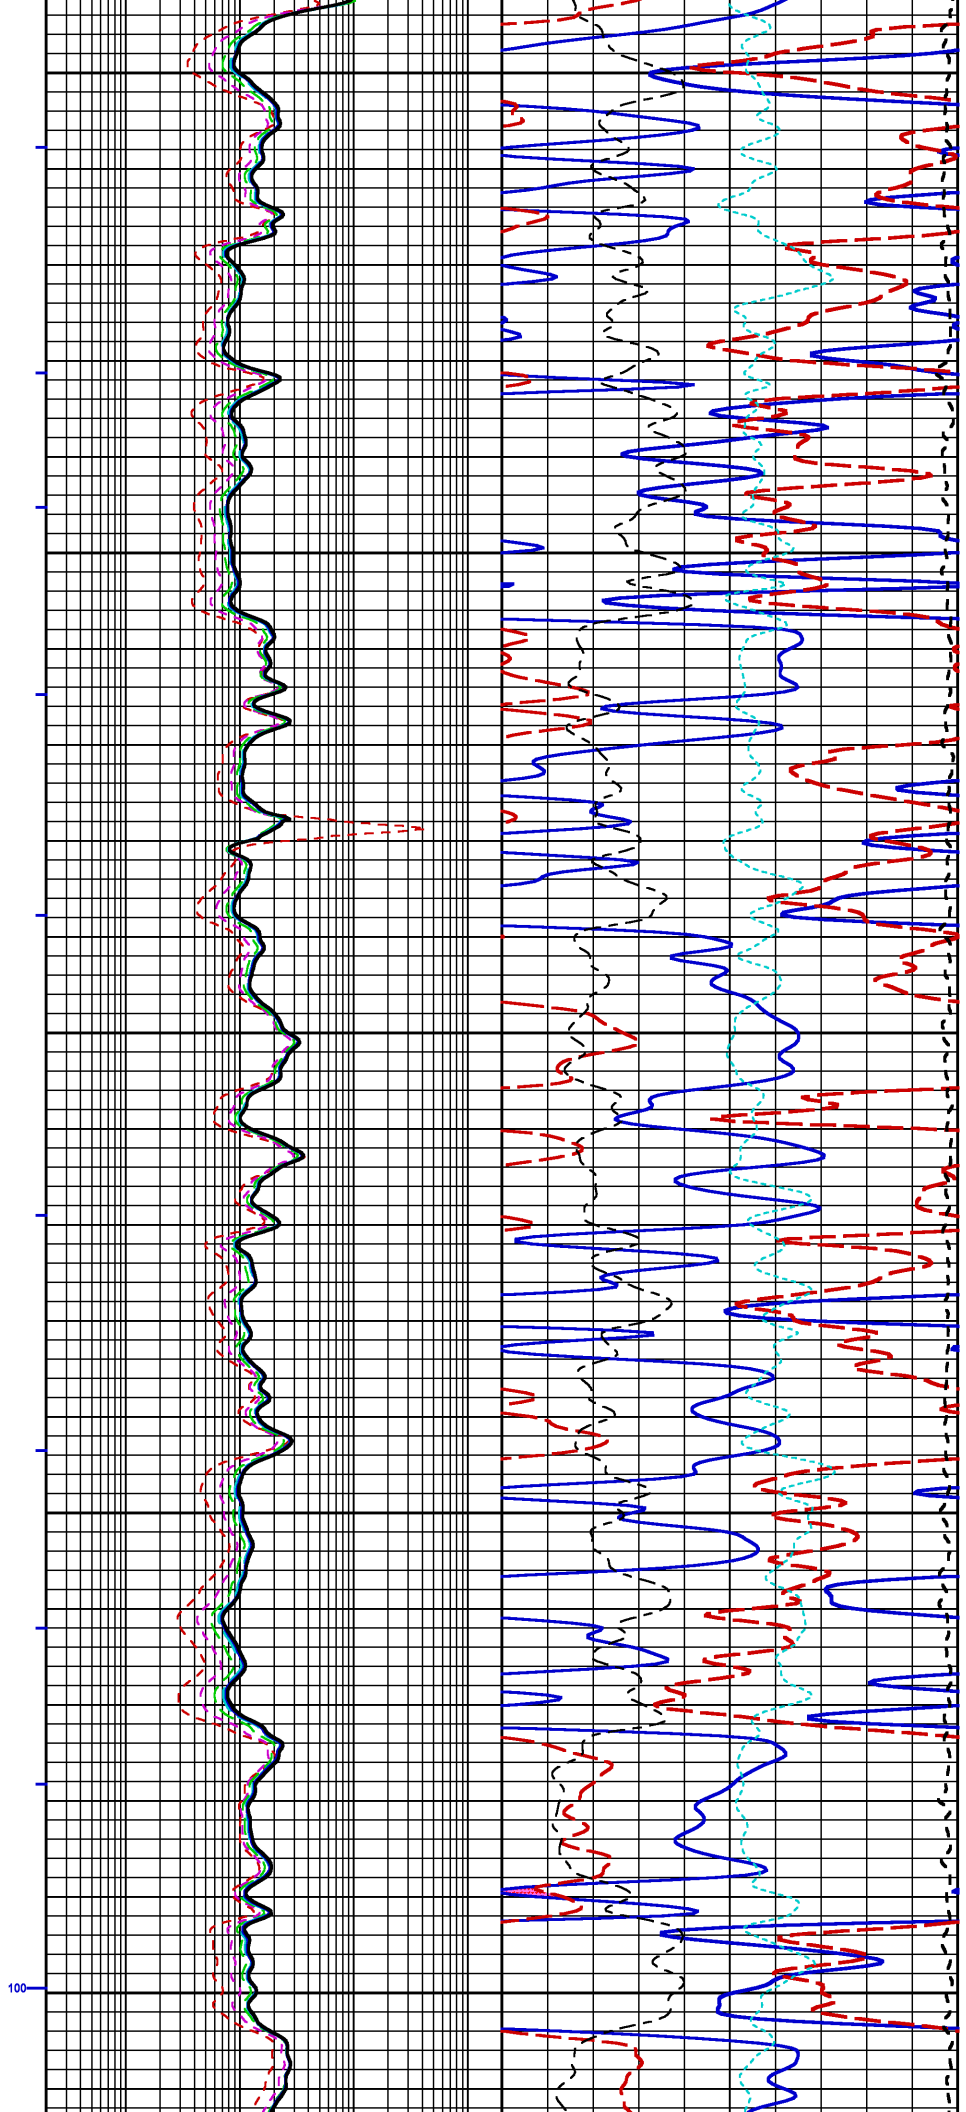

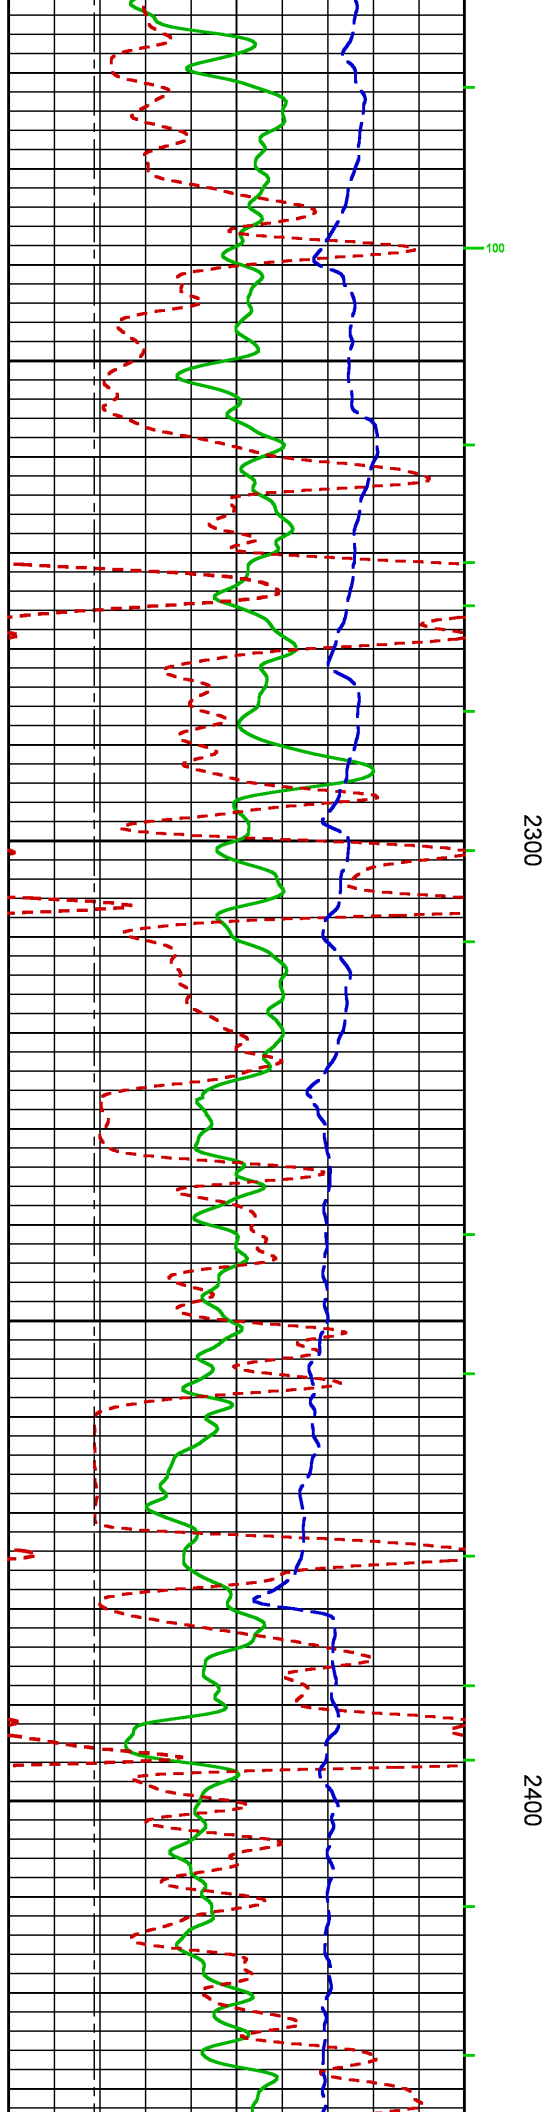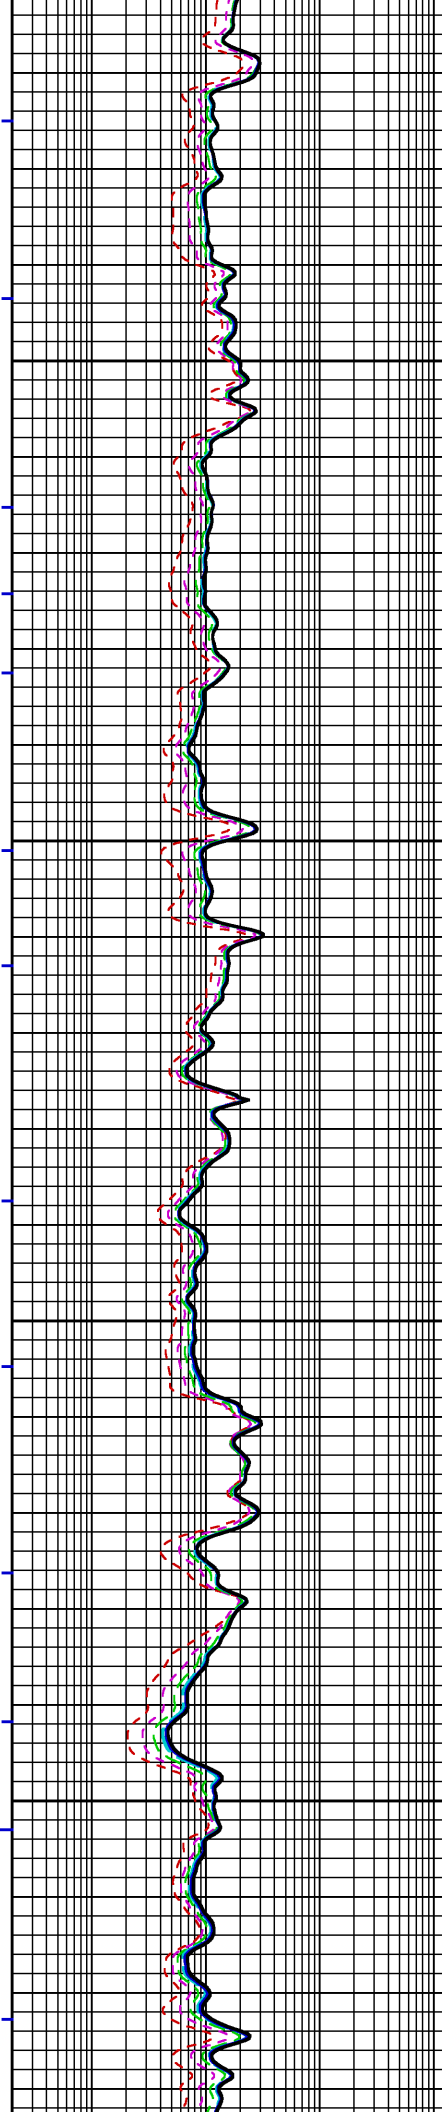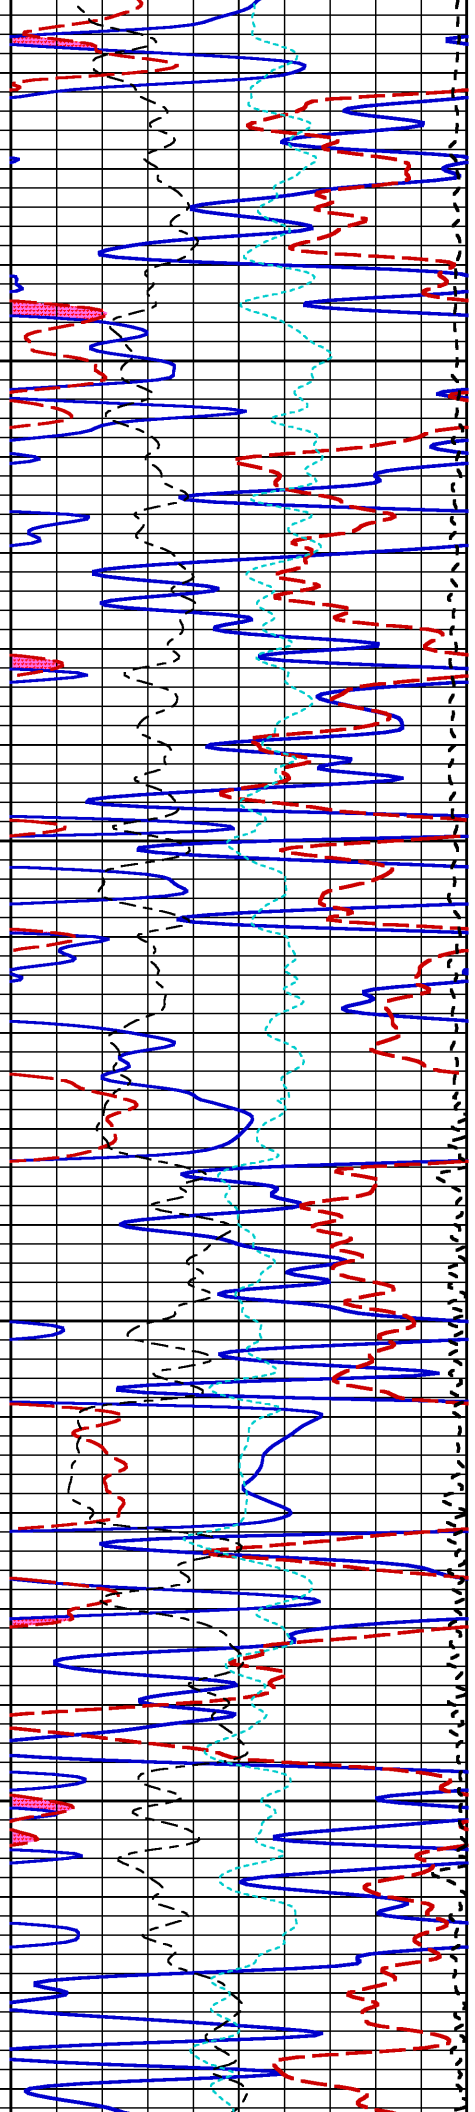

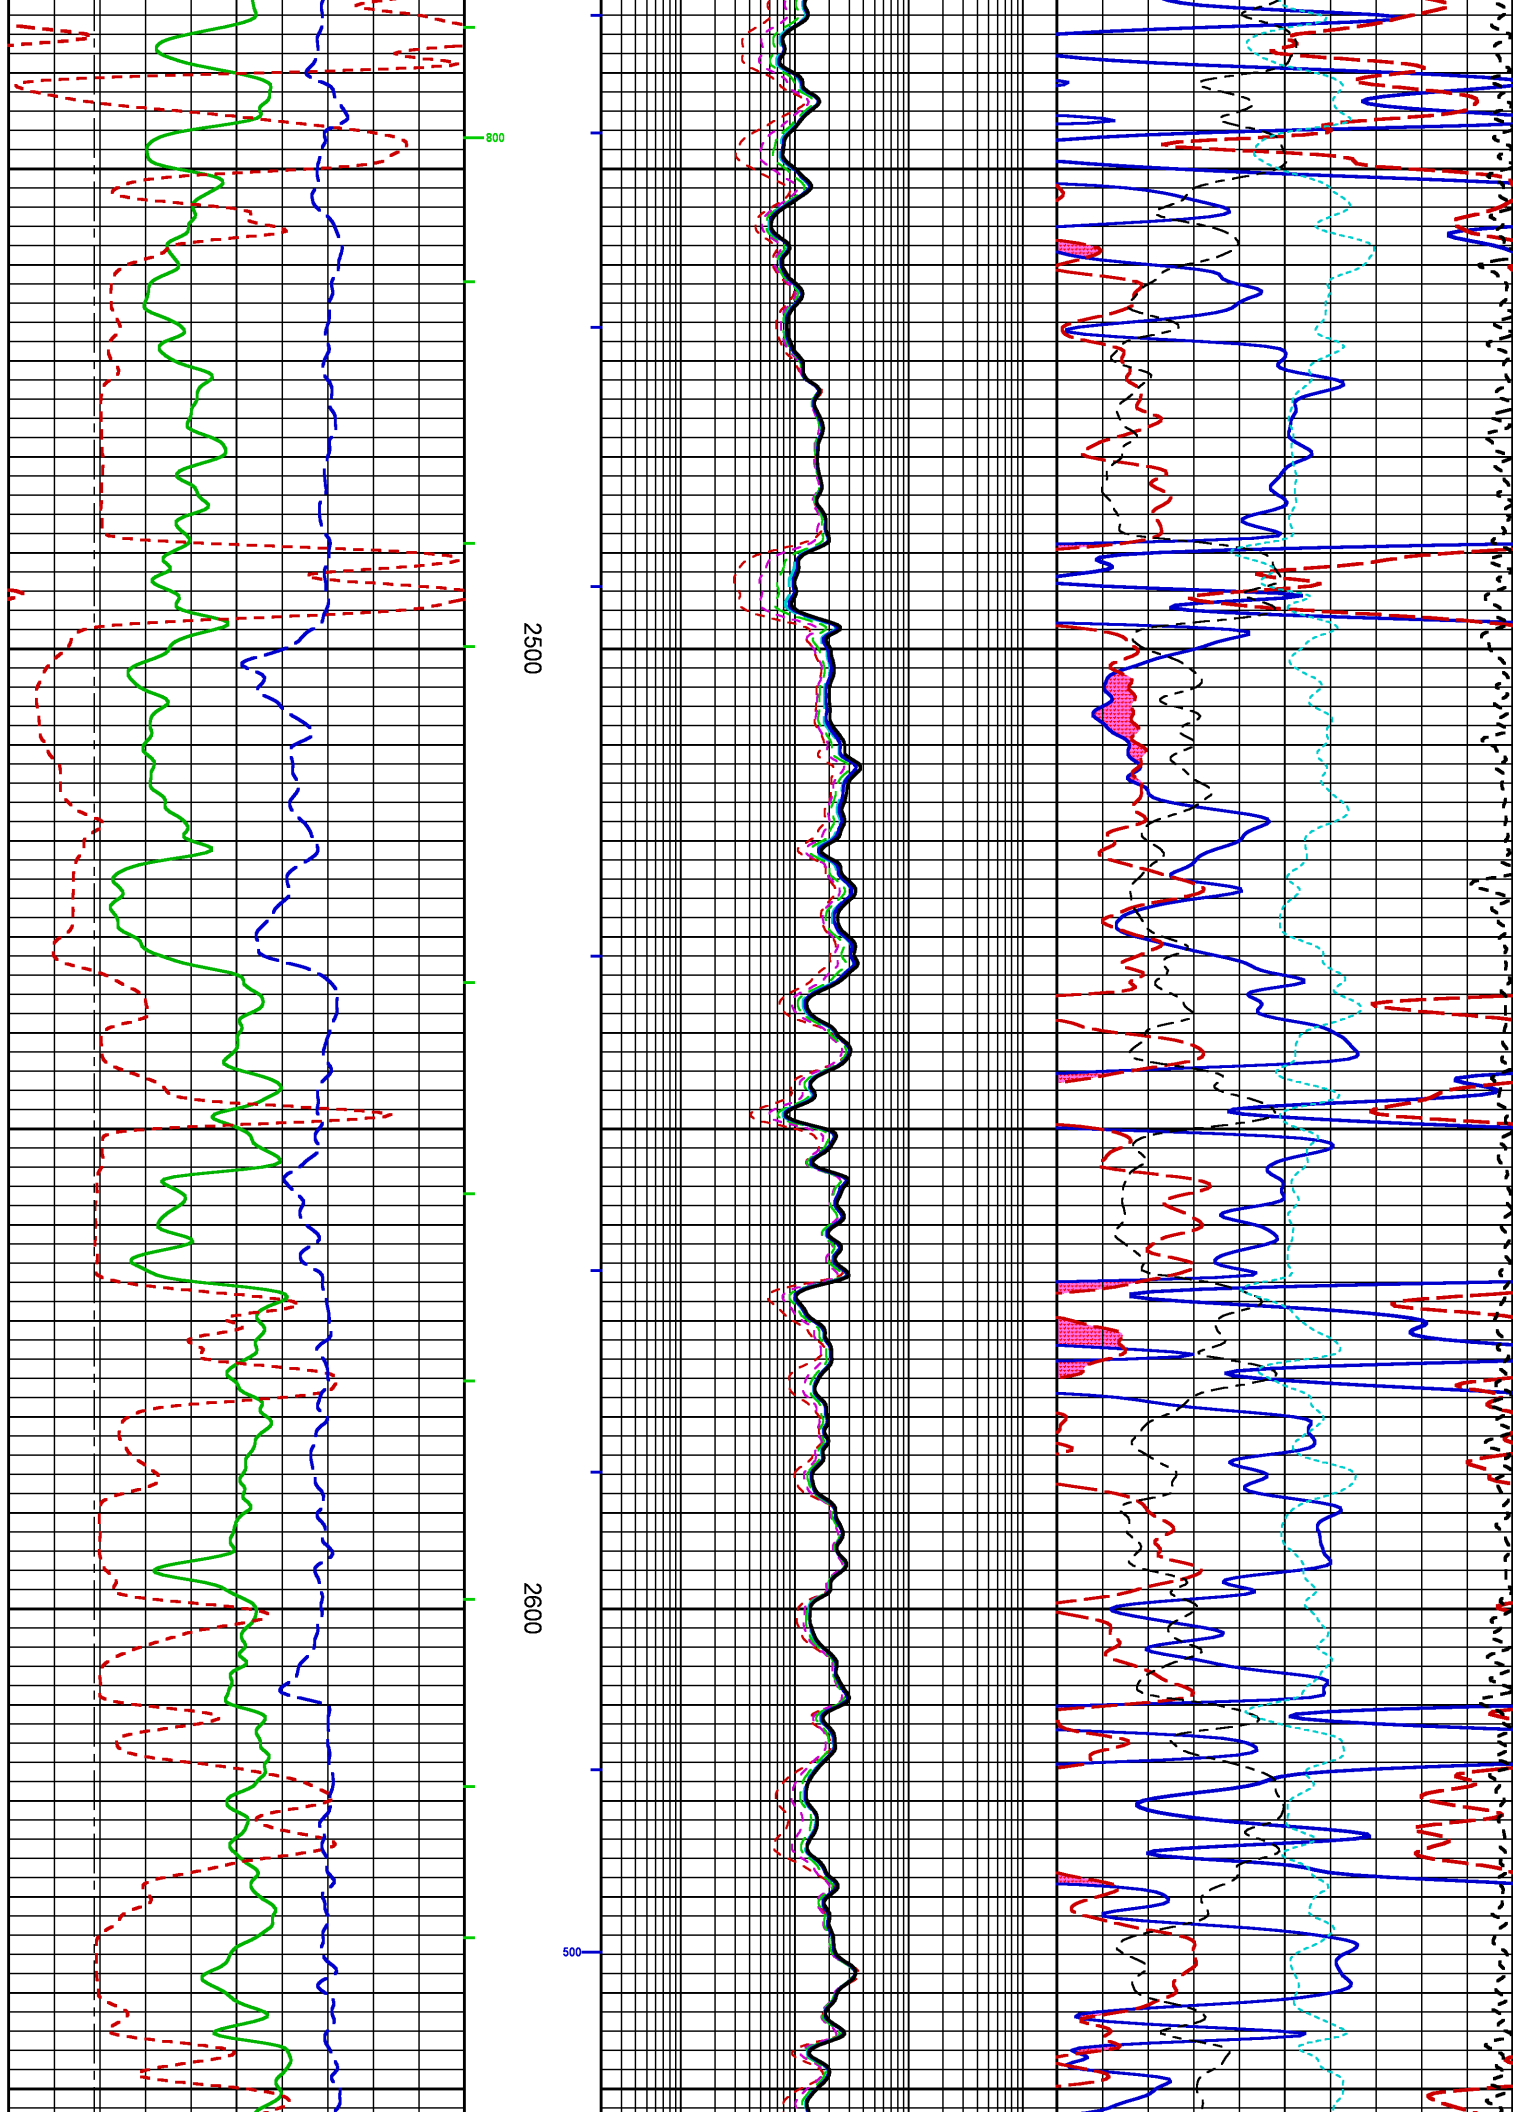

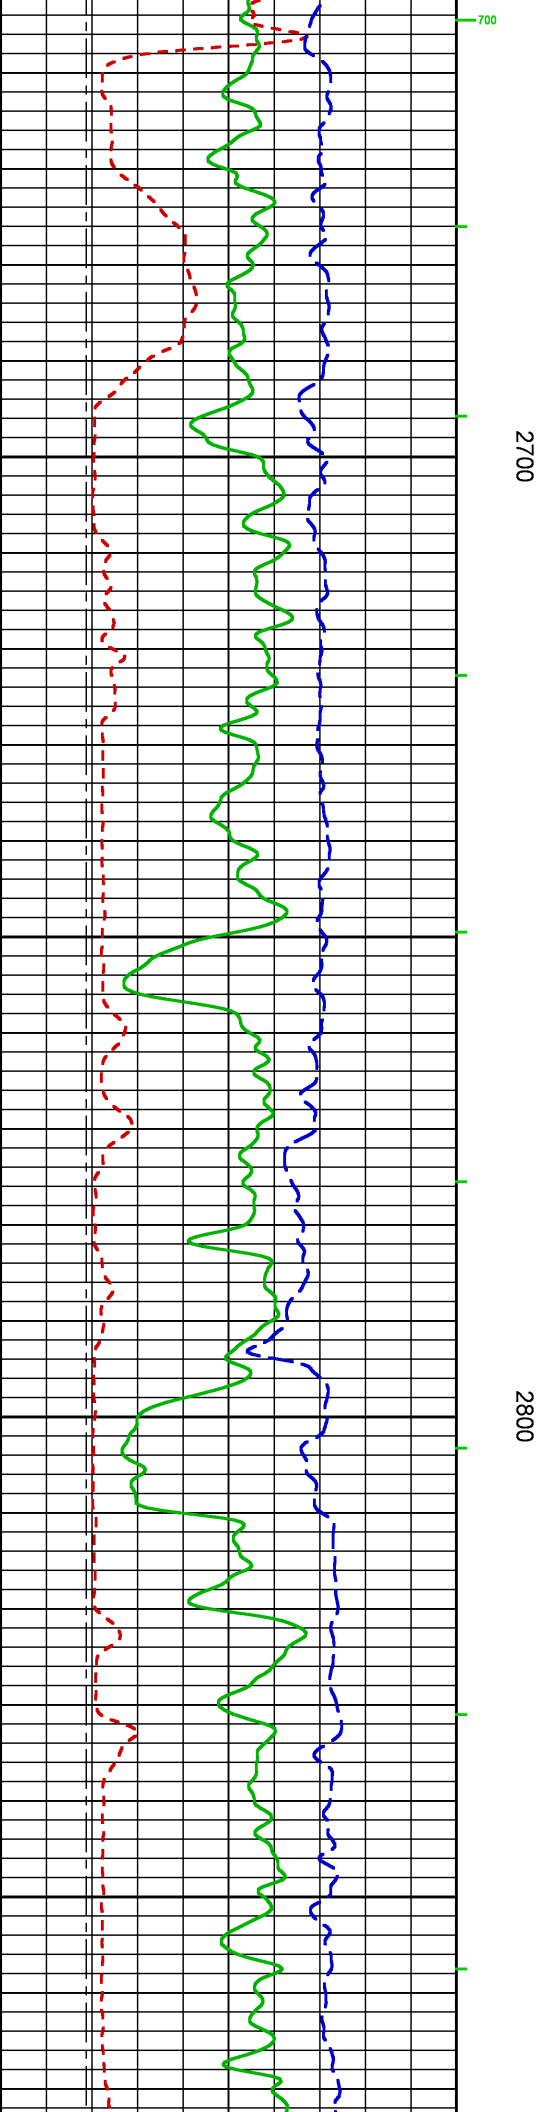
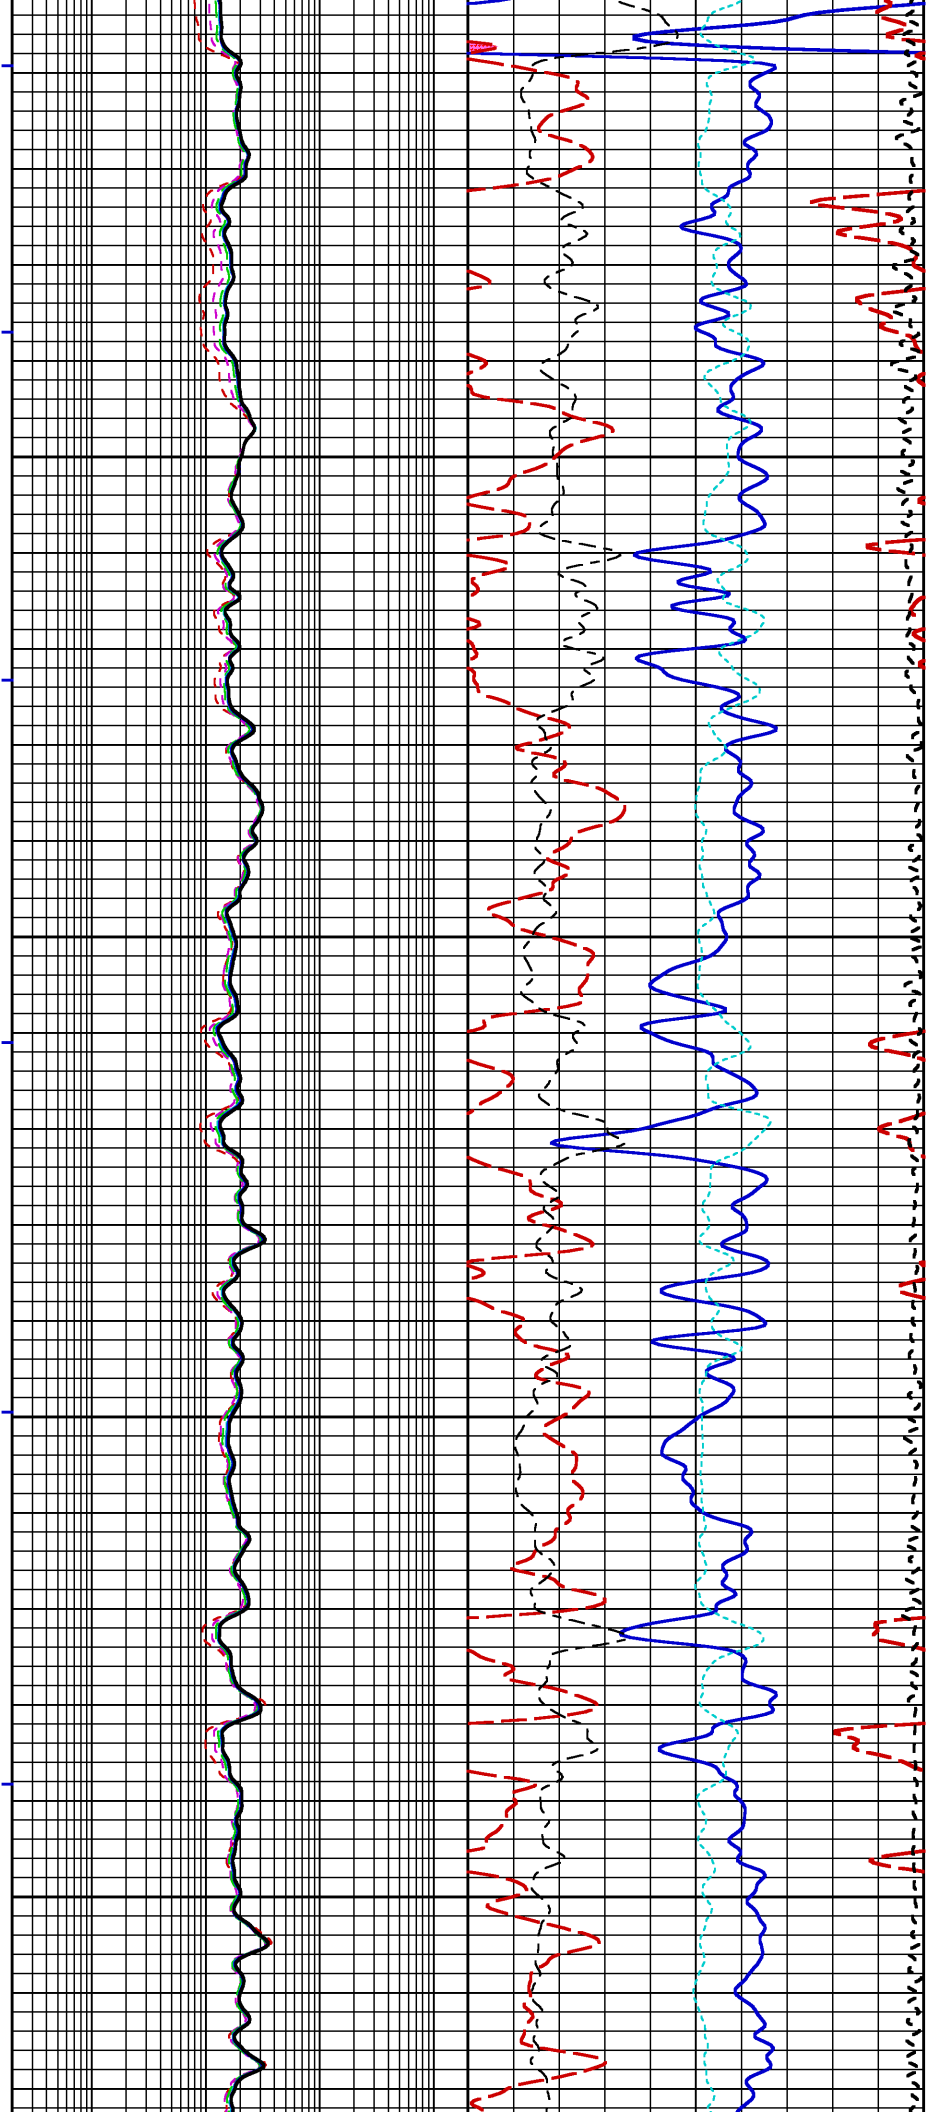


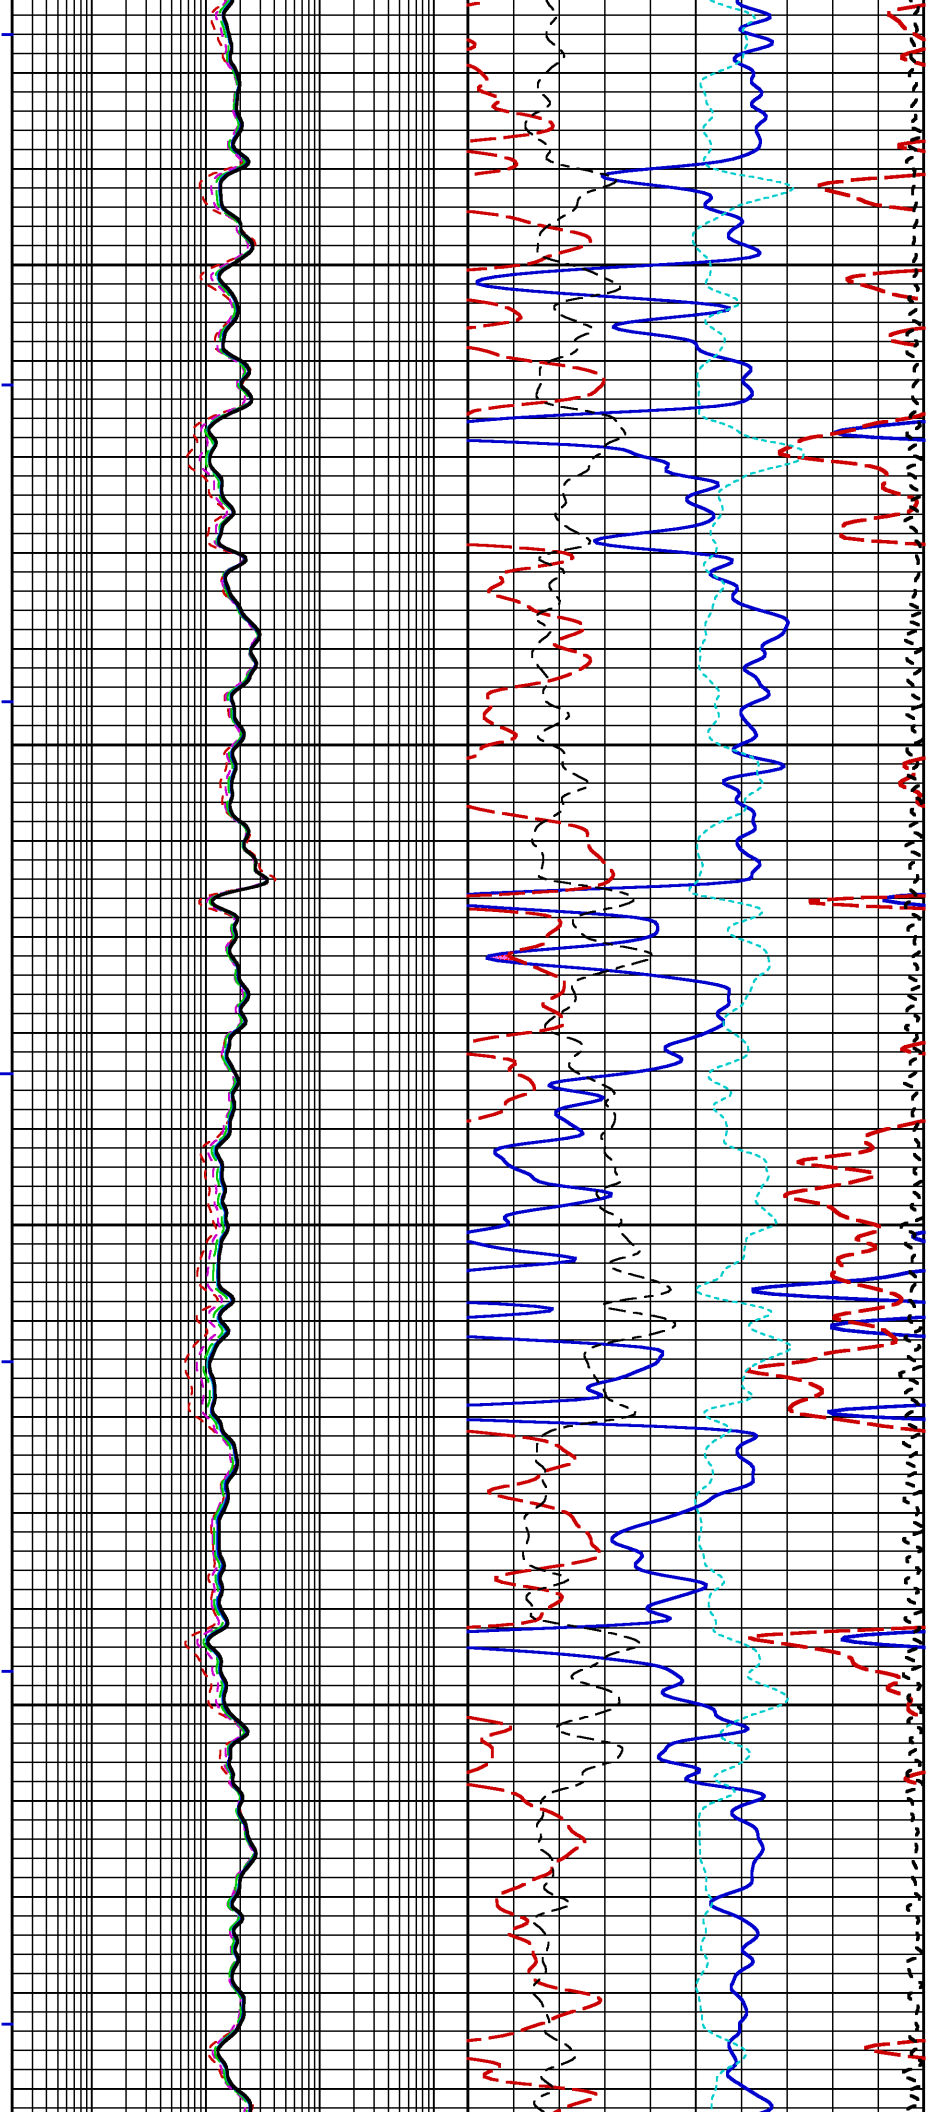



2900


600

3000

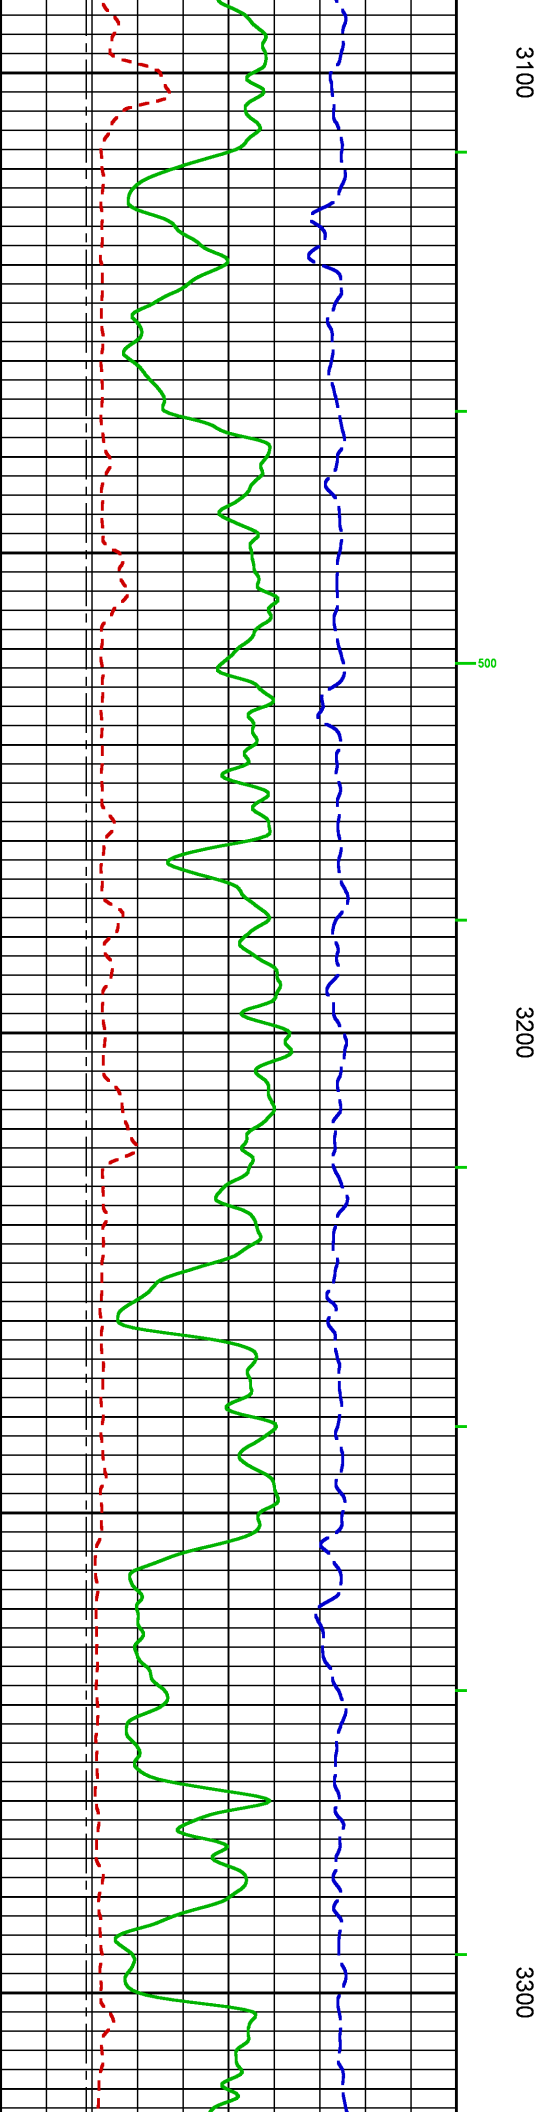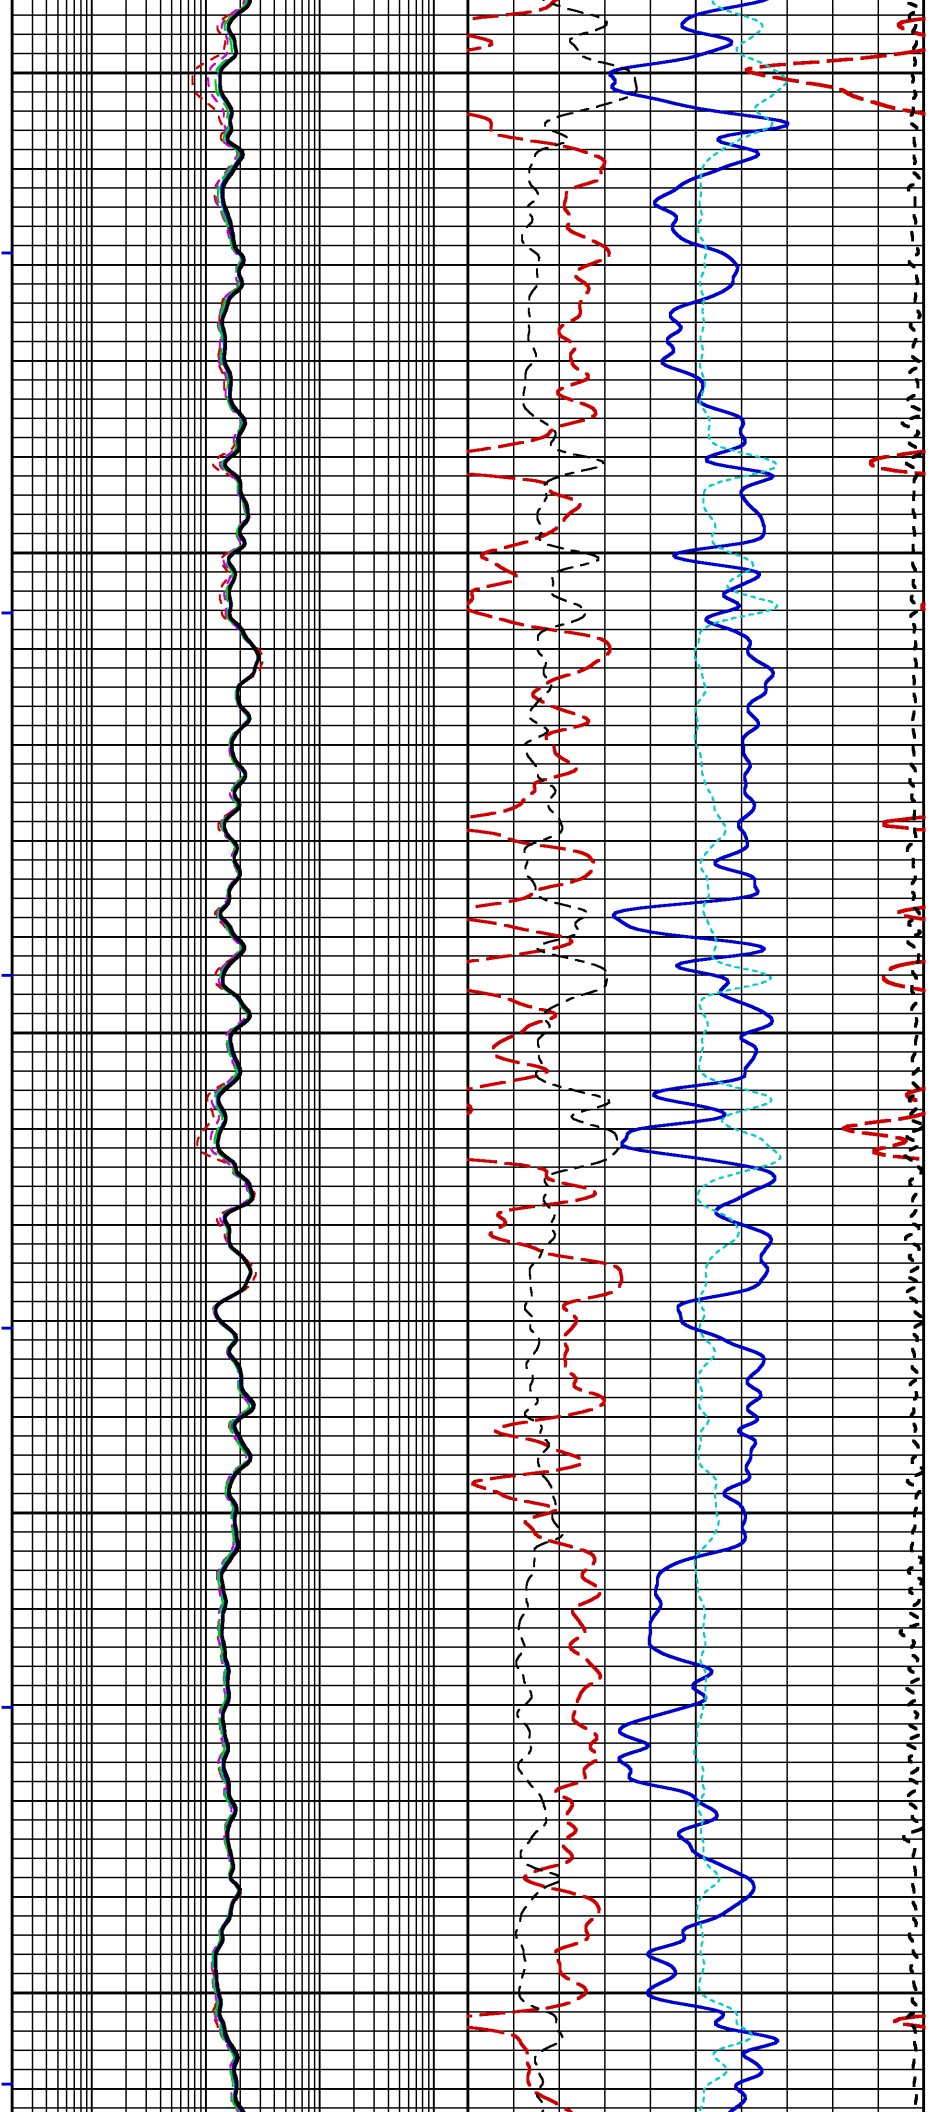

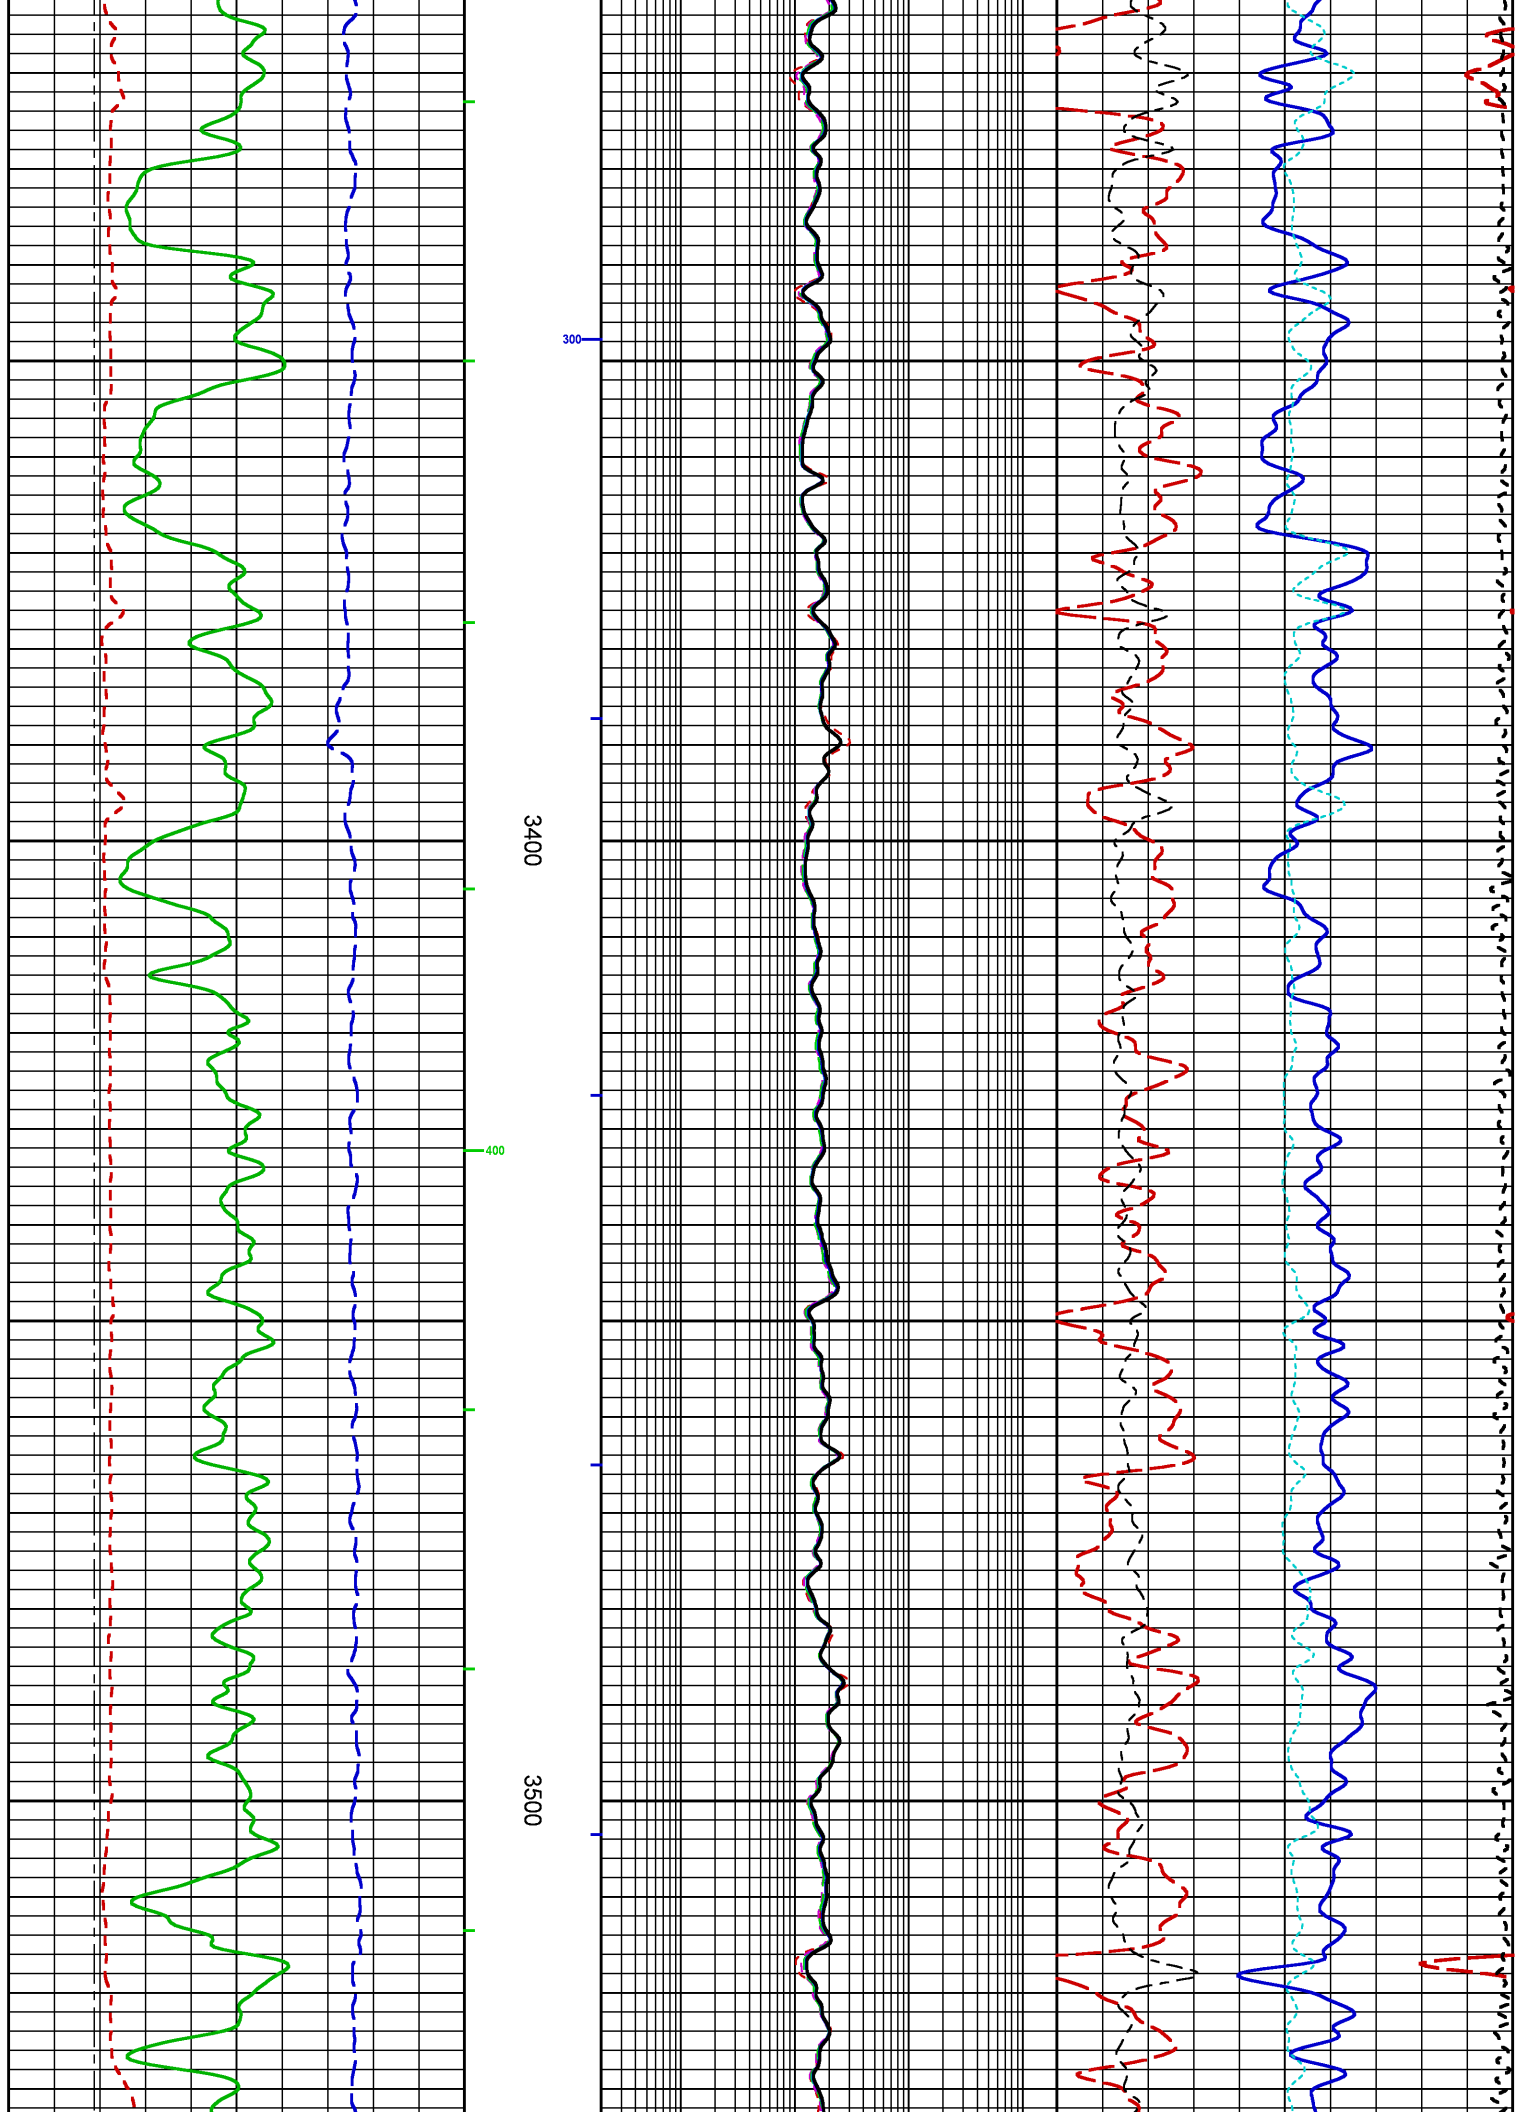



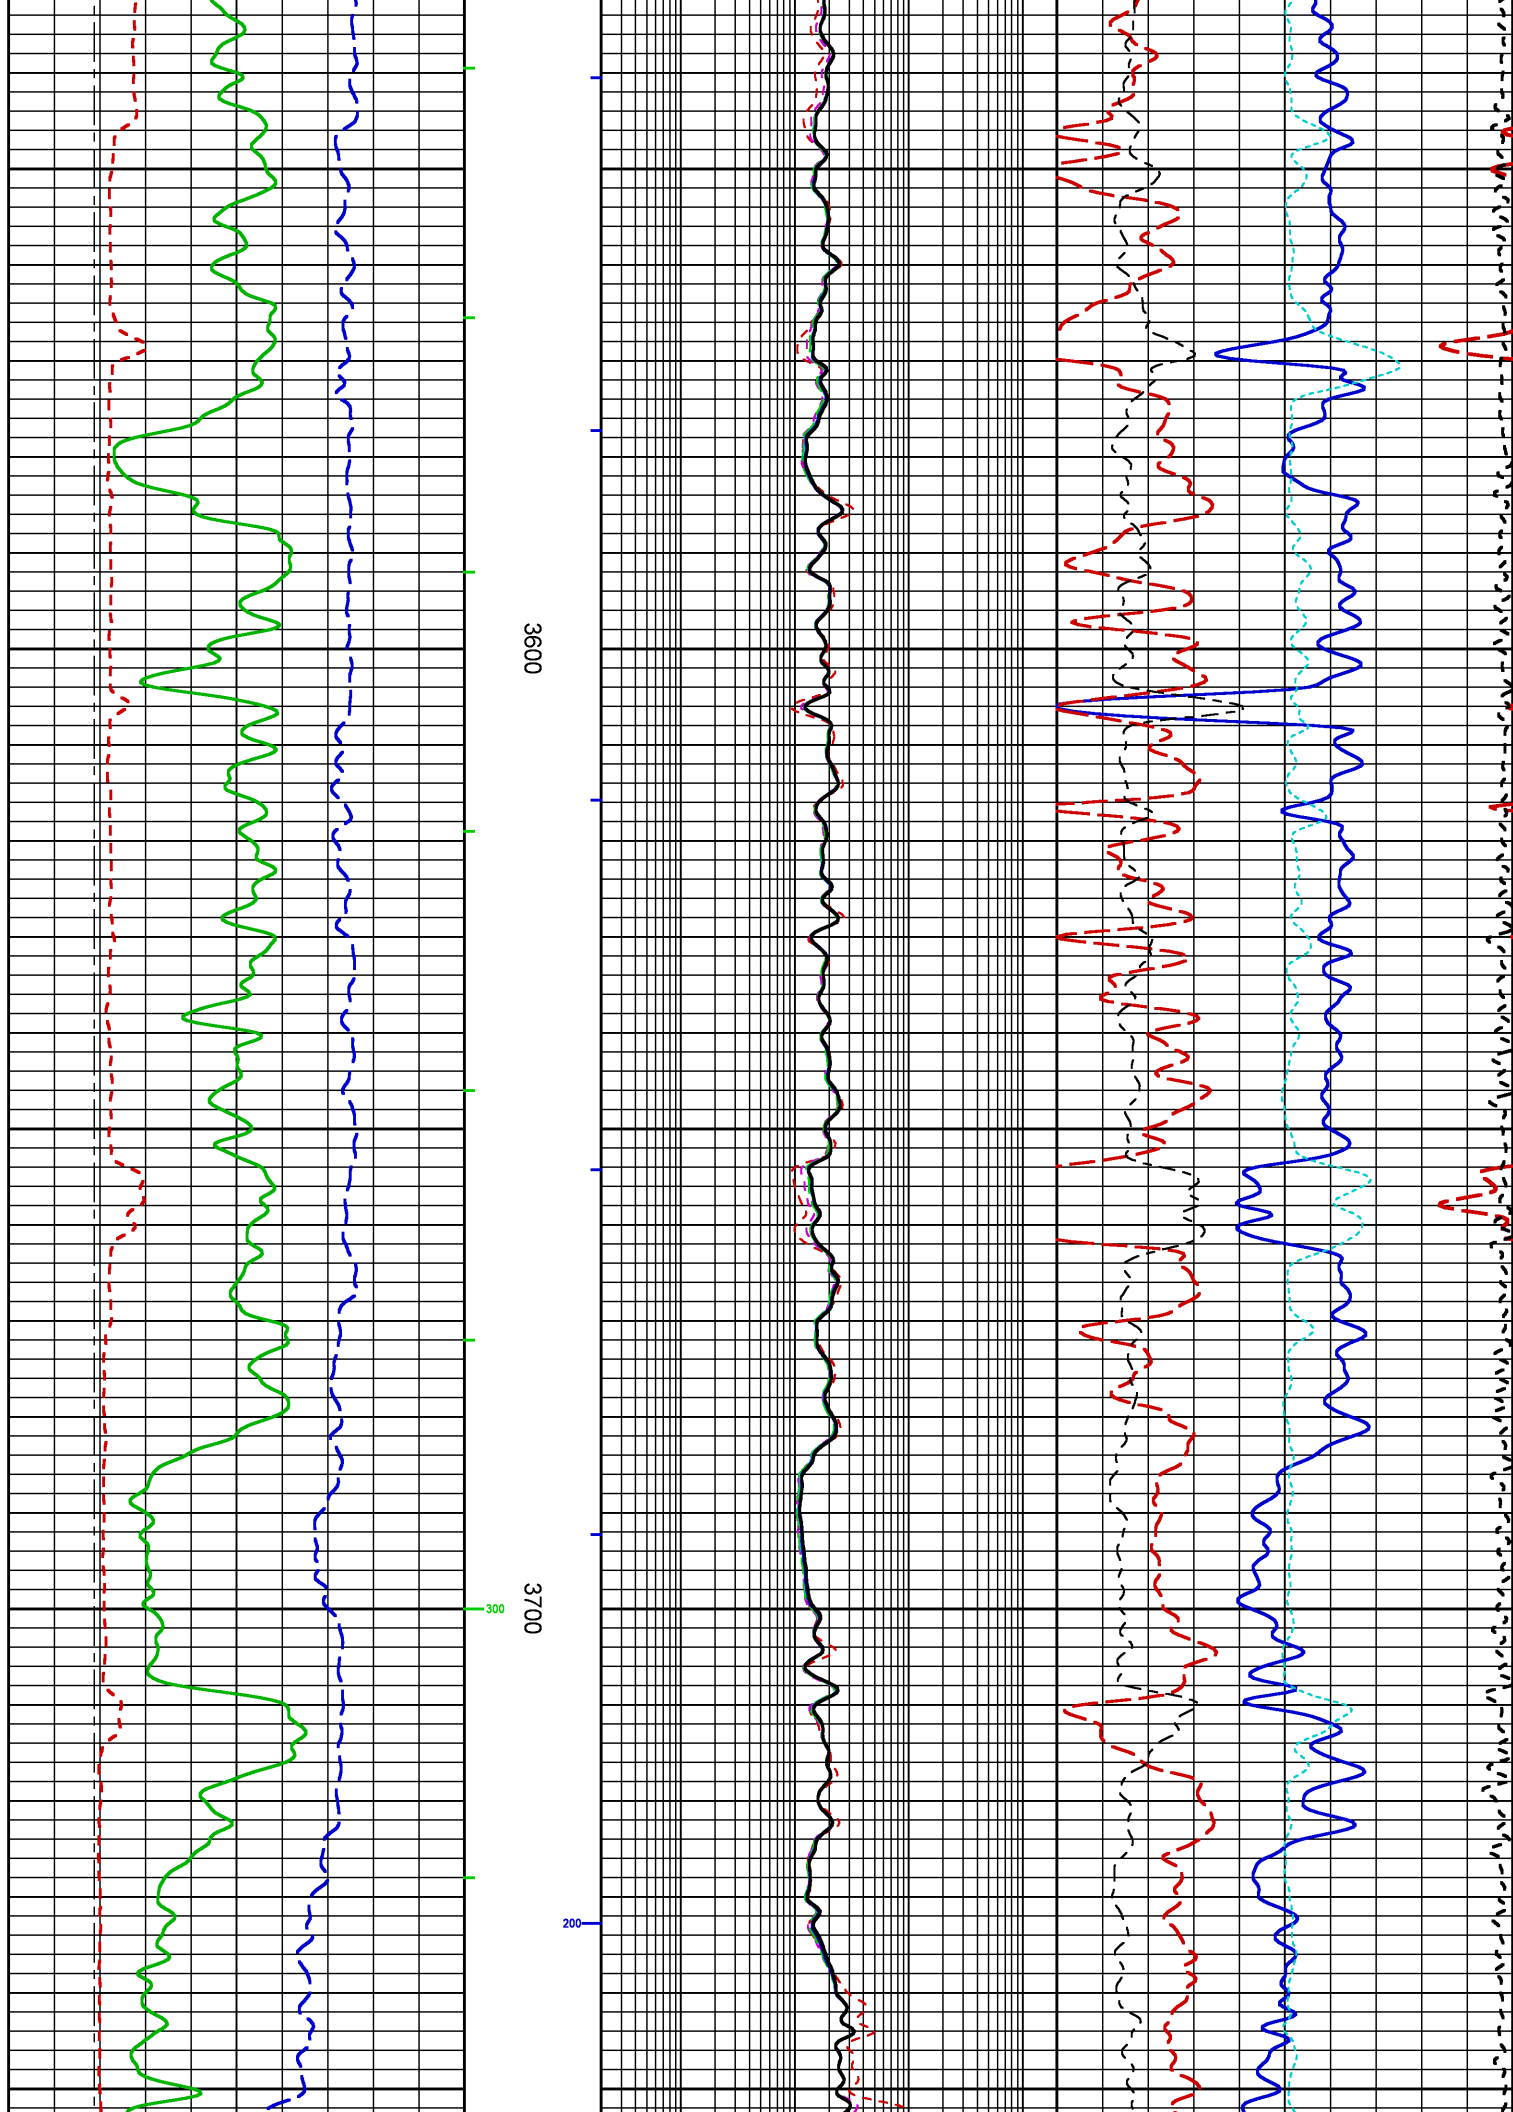



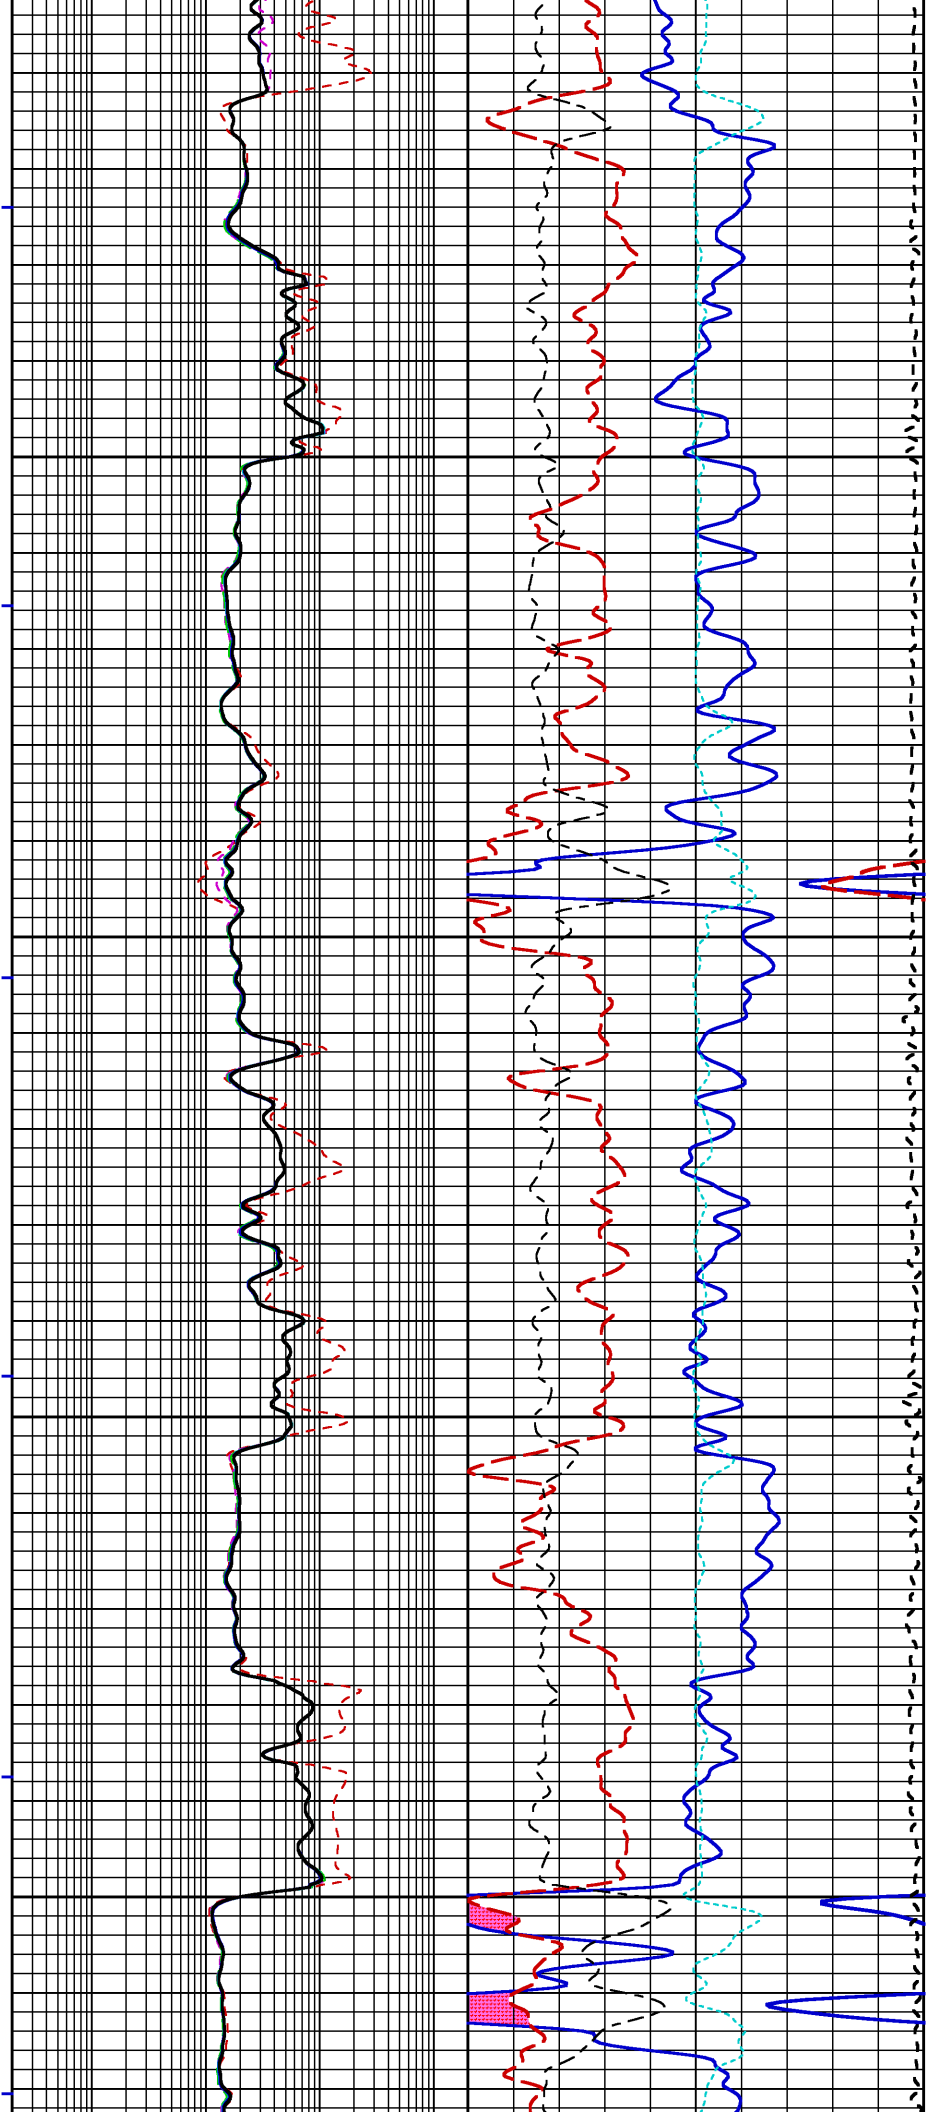


3800

3900

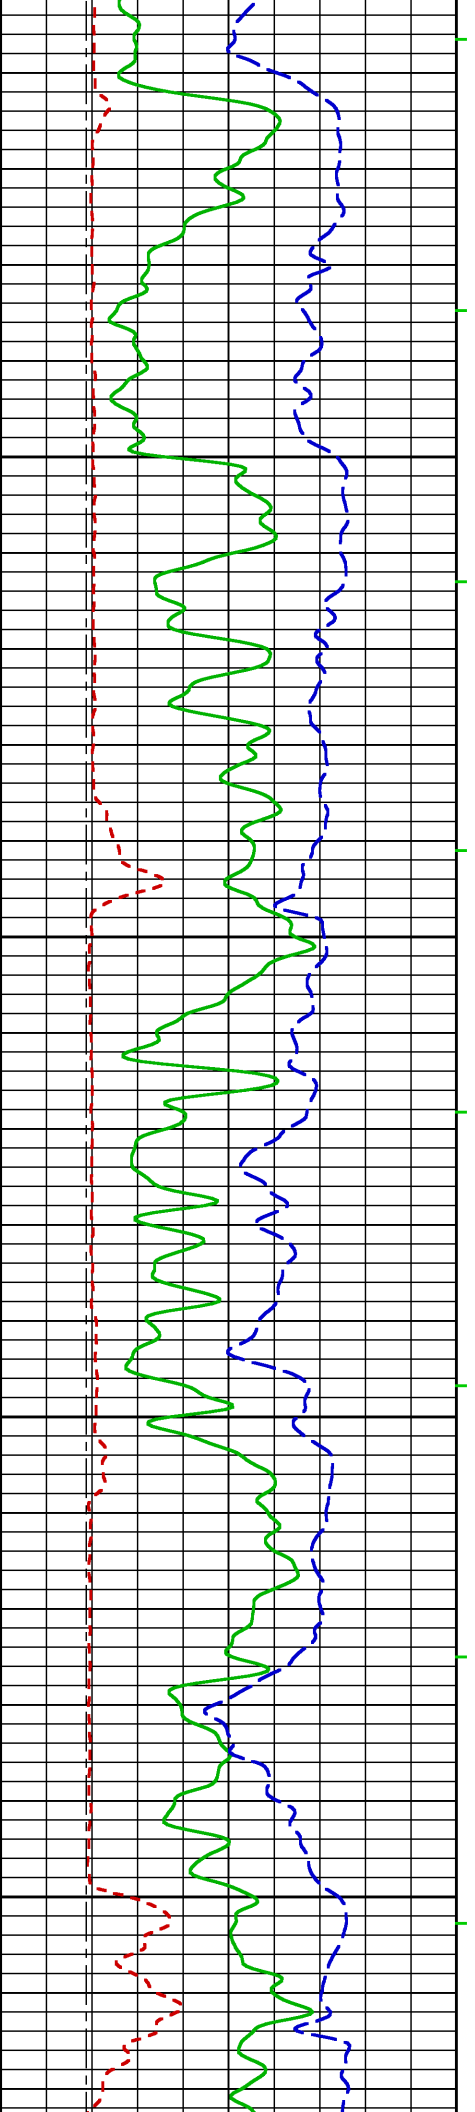

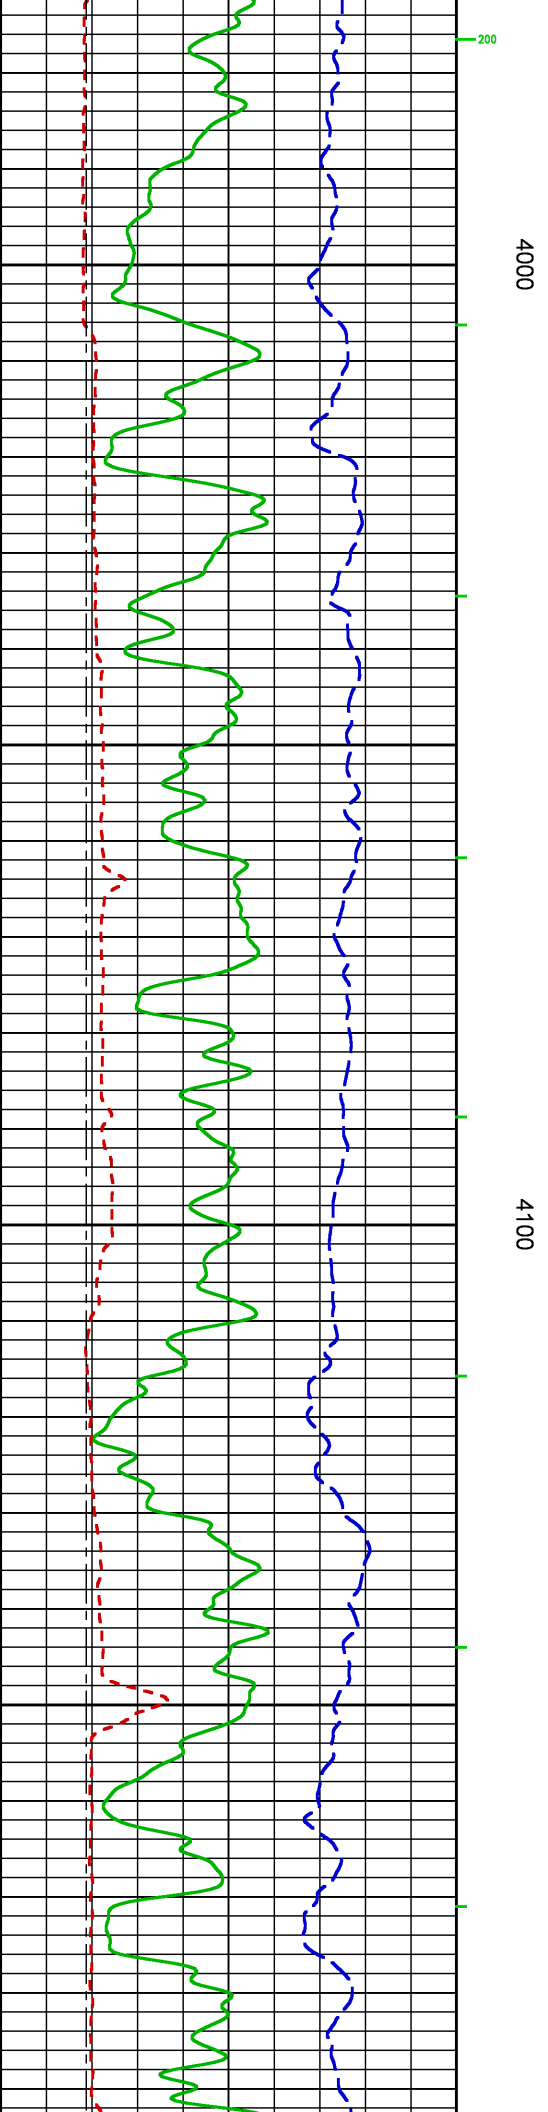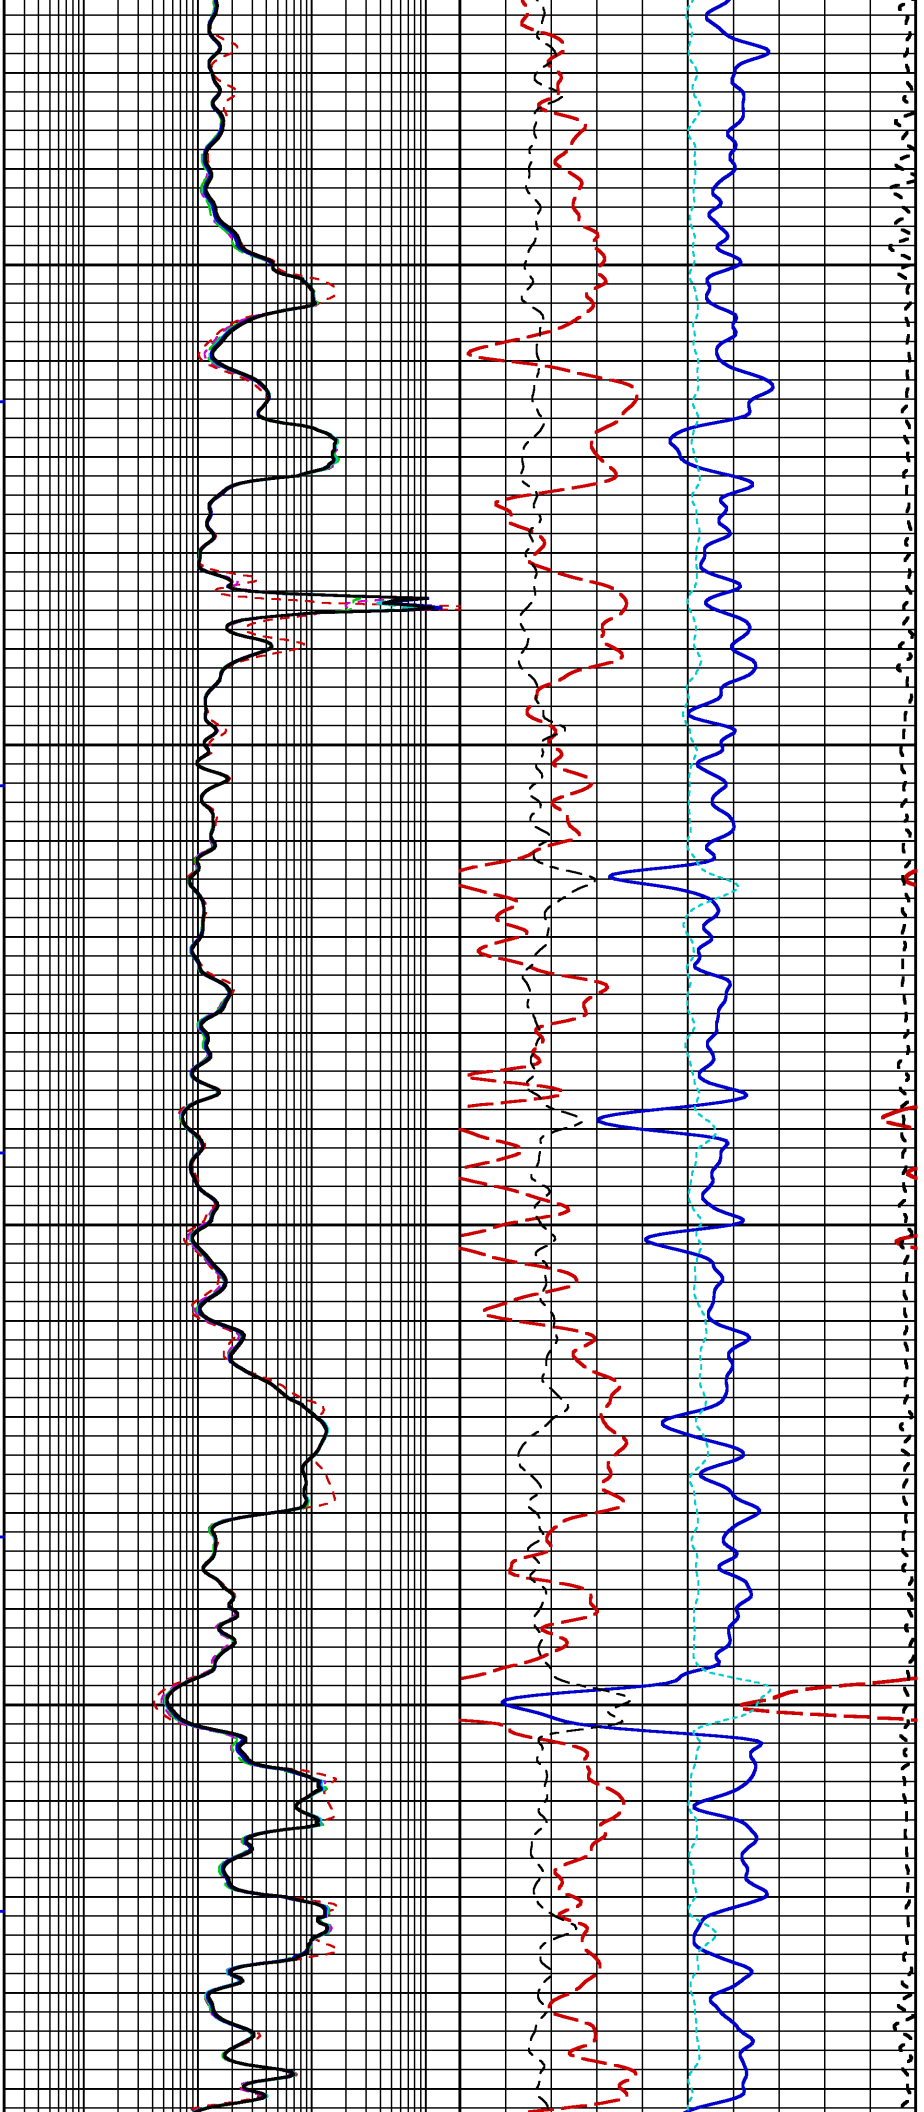

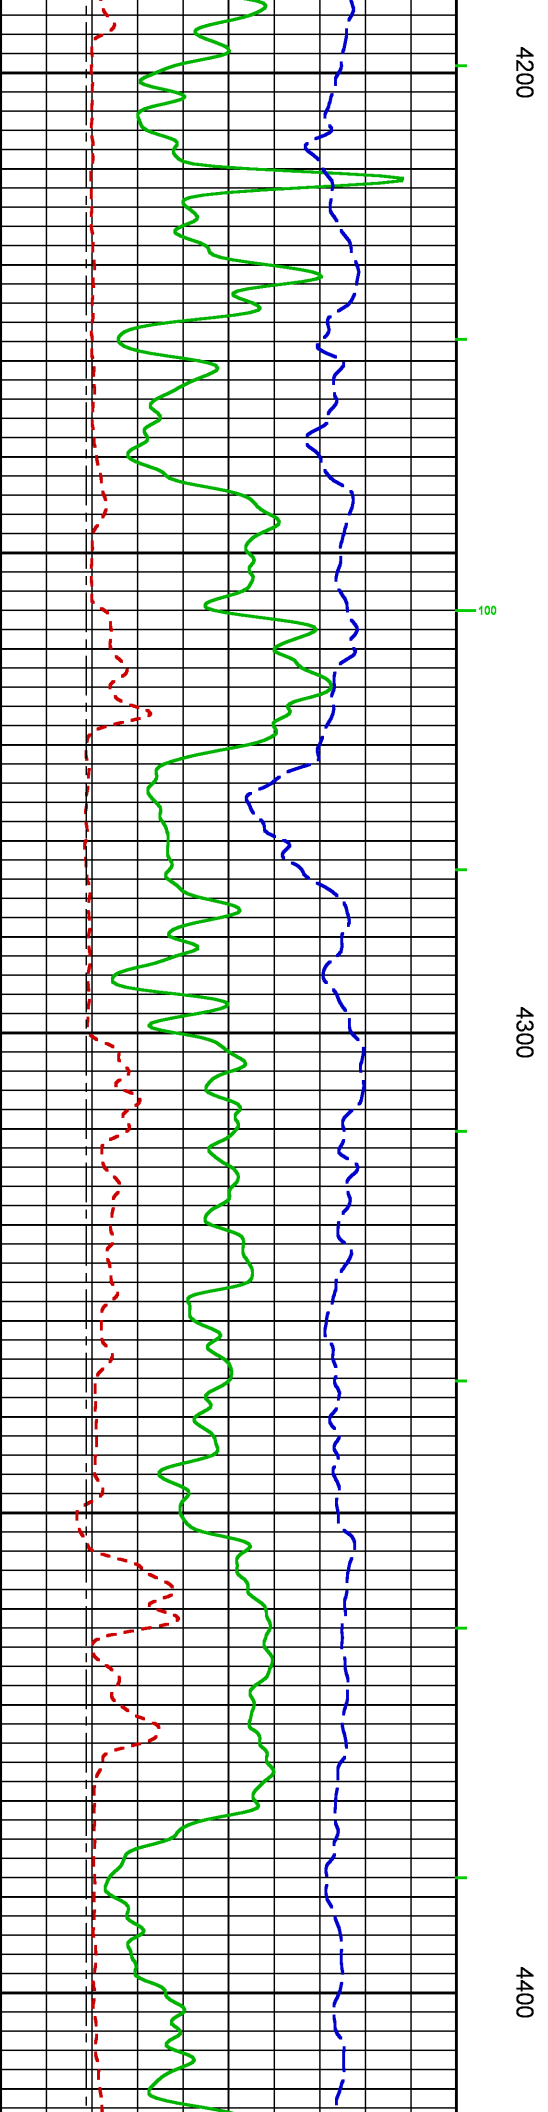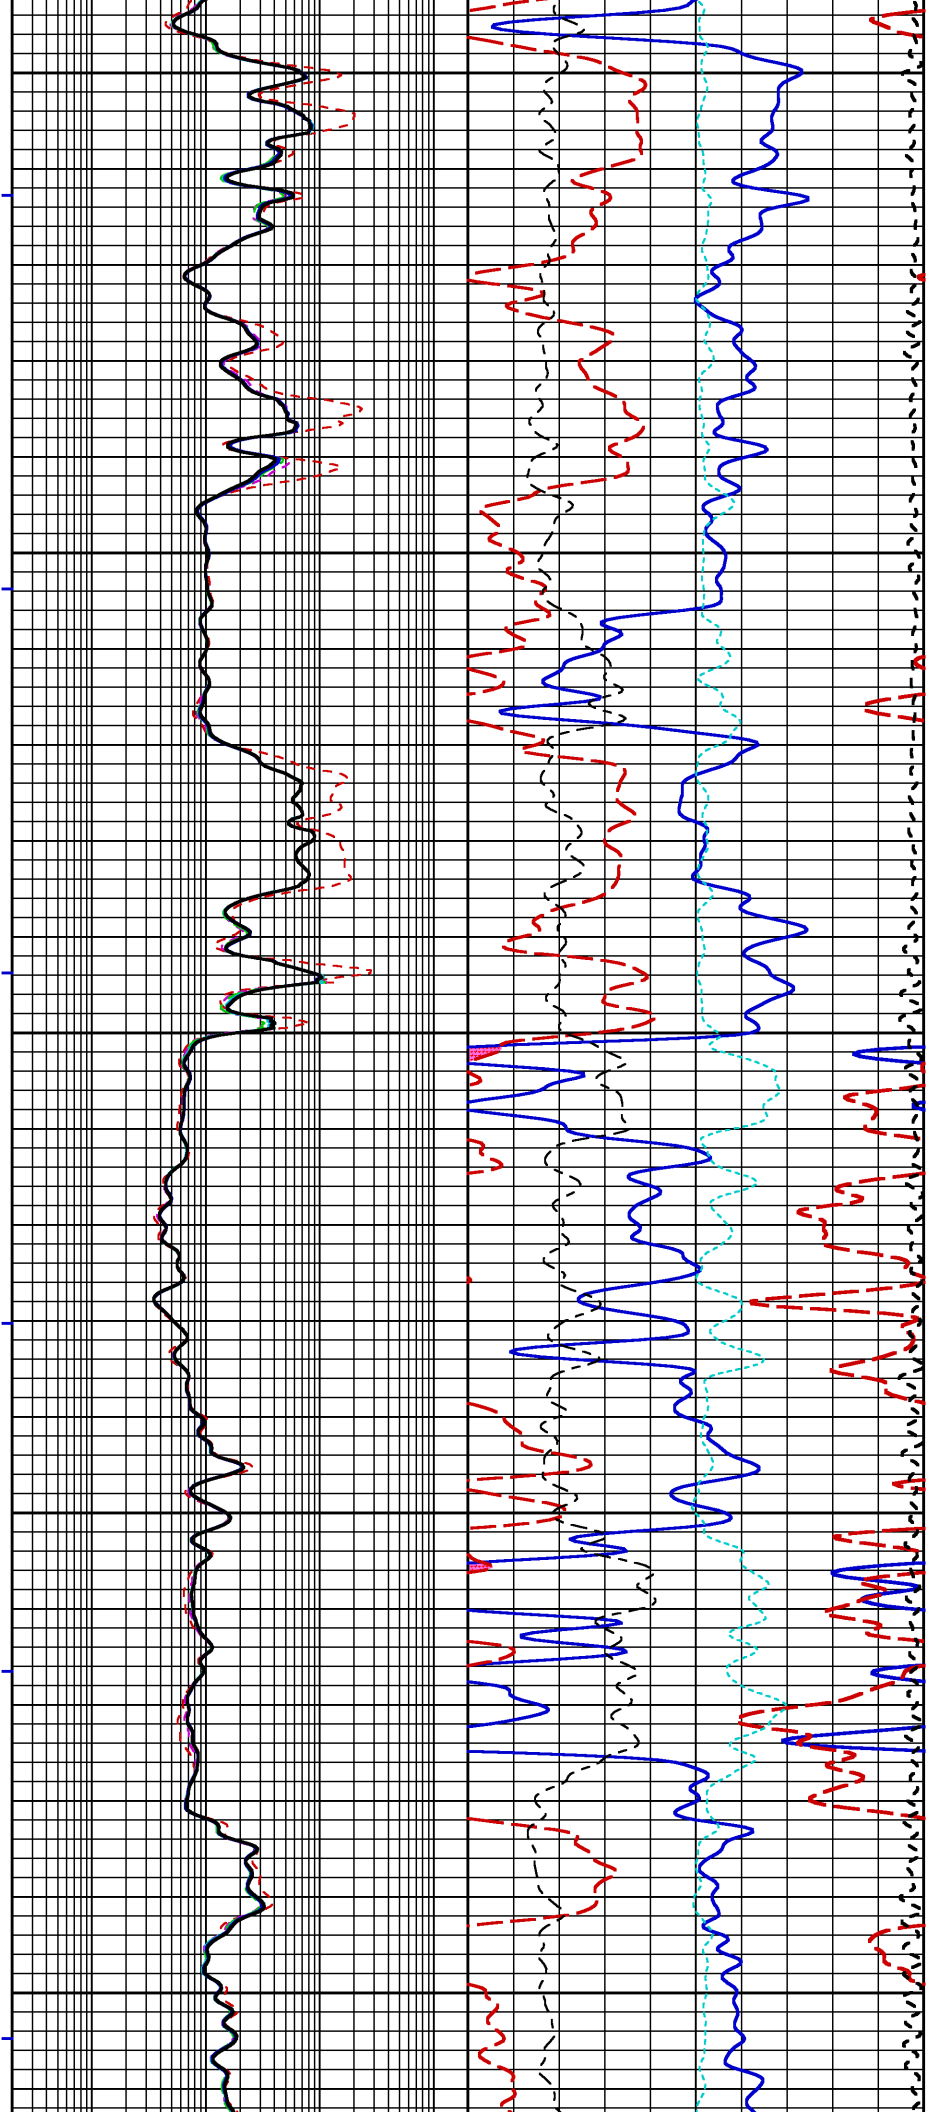

REPEAT LOG 5"/100FT SCALE

ECLIPS 7.0i ECLIPS General Release Rel 7.0i Thu Jun 08 20:36:10 CDT 2017

Patches: 2

Plotted: Fri Mar 9 20:45:31 2018

PARAMETER AND FILTER SUMMARY REPORT

FILE: /dat1a/LARAMIE_NICHOLS_0994-24-11E/p777q01.prm
 LOGGING MODE: DEPTH DIRECTION: UP
 TOP DEPTH: 1478.000 ft BOTTOM DEPTH: 1771.500 ft

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
Y AXIS CALIPER	FILTER ()	medium (1)		TOP	BOTTOM
TENSION	FILTER ()	medium (1)		"	"
GR	FILTER ()	medium (1)		"	"
CN	FILTER ()	medium (1)		"	"
CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
ZDL MED RES	FILTER (hrd1*)	medium		"	"
	FILTER (hrd1s*)	medium		"	"
	FILTER (hrd2*)	medium		"	"
	FILTER (hrd2s*)	medium		"	"
	FILTER (soft*)	medium		"	"
SP-SPDH	FILTER ()	medium (1)		"	"

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
CASING - BOREHOLE & CEMENT VOLUME	CASING O.D.	4.500	in	TOP	1720.500
		0.000	in	1720.500	BOTTOM
	CASING THICKNESS	0.000	in	TOP	BOTTOM
BIT SIZE	BIT SIZE	7.875	in	"	"
MUD SAMPLE RESISTIVITY	MUD SAMPLE TEMP	97.3	degF	TOP	1752.000
		77.0	degF	1752.000	BOTTOM
	MUD SAMPLE RES	1.000	ohm.m	TOP	BOTTOM
BOREHOLE TEMP from GRADIENT	Known BH REF TEMP	97.3	degF	TOP	1747.250
		77.0	degF	1747.250	BOTTOM
	at BH REF DEPTH	1754.0	ft	TOP	1745.000
		0.0	ft	1745.000	BOTTOM
	with TEMP GRADIENT	1.200	0.01 degF/ft	TOP	BOTTOM
BOREHOLE CORR DIAMETER SOURCE	CALIPER/FIXED DIA. (cnbh*)	USE CALIPER		"	"
	CALIPER/FIXED DIA. (mbh*)	USE CALIPER		"	"
BOREHOLE CORR DIAMETER	FIXED DIAMETER (cnbh*)	7.875	in	"	"
	FIXED DIAMETER (mbh*)	7.875	in	"	"
BH MUD RESISTIVITY SOURCE	RMUD SOURCE (HDIL)	MUD SAMP DERIVED		"	"

CN PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
2446 CN MATRIX	2446 MATRIX	SANDSTONE LIMESTONE		TOP 1696.250	1696.250 BOTTOM
CN SALINITY CORRECTION	SALINITY CORR (2446)	SAL & BH SIZE ON		TOP	BOTTOM
	SALINITY	800	ppm	TOP	1694.000
		0	ppm	1694.000	BOTTOM
CN TOOL STANDOFF	ENABLE STANDOFF CORR	OFF		TOP	BOTTOM
	STANDOFF AMOUNT	0.00	in	"	"
CN CASING & CEMENT CORRECTION	CORRECTION	OFF		"	"
	BIT SIZE BEHIND CSNG	7.875	in	"	"

ZDL PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
DENSITY POROSITY	RHOMatrix	2.680	g/cm3	TOP	1701.250
		2.710	g/cm3	1701.250	BOTTOM


ZDL	RHOfluid	1.000	g/cm3	TOP	BOTTOM
TRACKING TIME	DENX TRACKING	ON		"	"
	Logging Spd for Gain	Over 10 ft/min		"	"


HDIL PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (ft)	
HDIL TEMPERATURE CORRECTION ADAPTIVE BOREHOLE CORRECTION	TEMP CORR SOURCE	USE RXTEMP		TOP	BOTTOM
	ABC PROCESSING	ON		"	"
	ABC to CALCULATE	STANDOFF		TOP	1724.250
		BOREHOLE SIZE		1724.250	BOTTOM
	STANDOFF	1.50	in	TOP	BOTTOM
	TOOL POSITION	ECCENTERED		"	"
HDIL High RESISTIVITY Normalization	Rmud MULTIPLIER	1.000		"	"
	VRM Norm	ON		"	"


CURVE DESCRIPTION REPORT		
CURVE NAME	CREATION DATE	CURVE DESCRIPTION
F1:BIT	N/A	BIT SIZE
F1:BVOL	N/A	BOREHOLE VOLUME
F1:CAL	N/A	CALIPER
F1:CNCF	N/A	FIELD NORMALIZED COMPENSATED NEUTRON POROSITY
F1:CVOL	N/A	CEMENT VOLUME
F1:GR	N/A	GAMMA RAY
F1:M2R1	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 10-INCH DOI
F1:M2R2	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 20-INCH DOI
F1:M2R3	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 30-INCH DOI
F1:M2R6	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 60-INCH DOI
F1:M2R9	N/A	VERTICAL 2-FOOT RESOLUTION MATCHED RESISTIVITY, 90-INCH DOI
F1:PE	N/A	PHOTO ELECTRIC CROSS-SECTION
F1:PORZ	N/A	POROSITY FOR SELECTABLE MATRIX
F1:SP	N/A	SPONTANEOUS POTENTIAL
F1:TEN	N/A	DIFFERENTIAL TENSION
F1:ZCOR	N/A	DENSITY CORRECTION

CURVE MEASURE POINT OFFSET							
CURVE	OFFSET (ft)	CURVE	OFFSET (ft)	CURVE	OFFSET (ft)	CURVE	OFFSET (ft)
BIT	0.00	M2R1	-8.00	M2R9	-8.00	TEN	0.00
CAL	-35.00	M2R2	-8.00	PE	-34.25	ZCOR	-34.25
CNCF	-45.25	M2R3	-8.00	PORZ	-34.25		
GR	-52.25	M2R6	-8.00	SP	-14.00		

Presentation	: SysA:/dat1a/LARAMIE_NICHOLS_0994-24-11E/LARAMIE_REPEAT.fvpdf [5"/100' Scale]
Plot Interval	: 1427 - 1771.5 Feet
Data File 1	: F1 : SysA:/dat1a/LARAMIE_NICHOLS_0994-24-11E/p777q01_RPT.xtf
Created On	: N/A
Company	: LARAMIE ENERGY II LLC
Well	: NICHOLS 0994-24-11E
Field	: VEGA
File Interval	: 1412.5 - 1771.5 Feet
OCT	: p777q

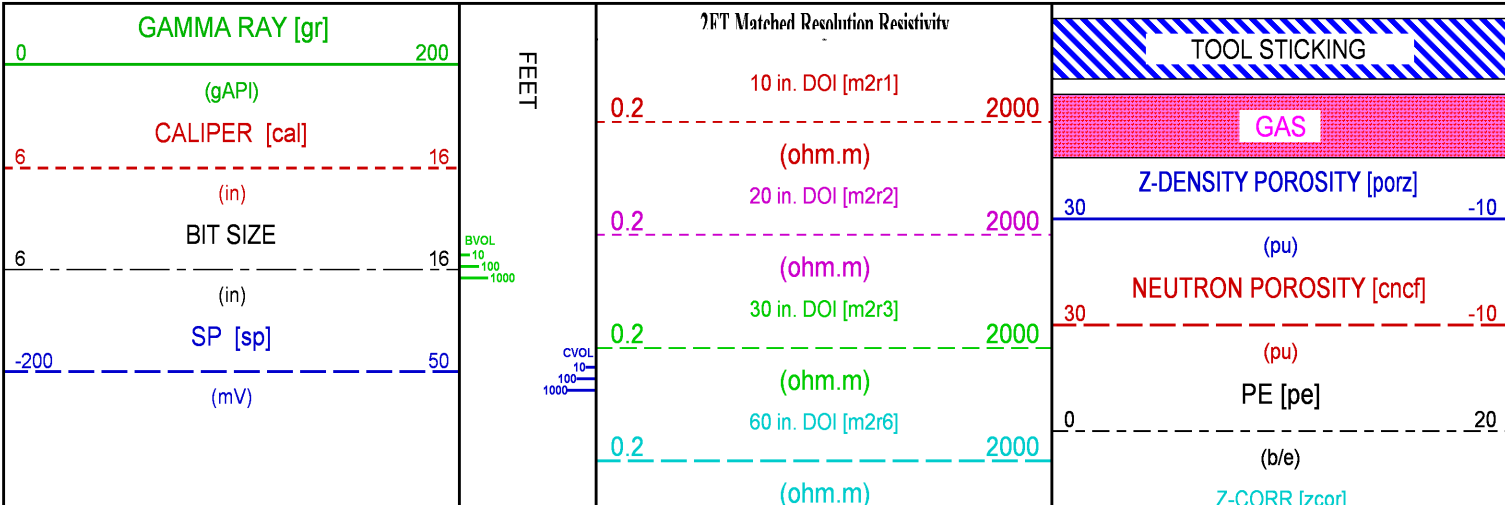

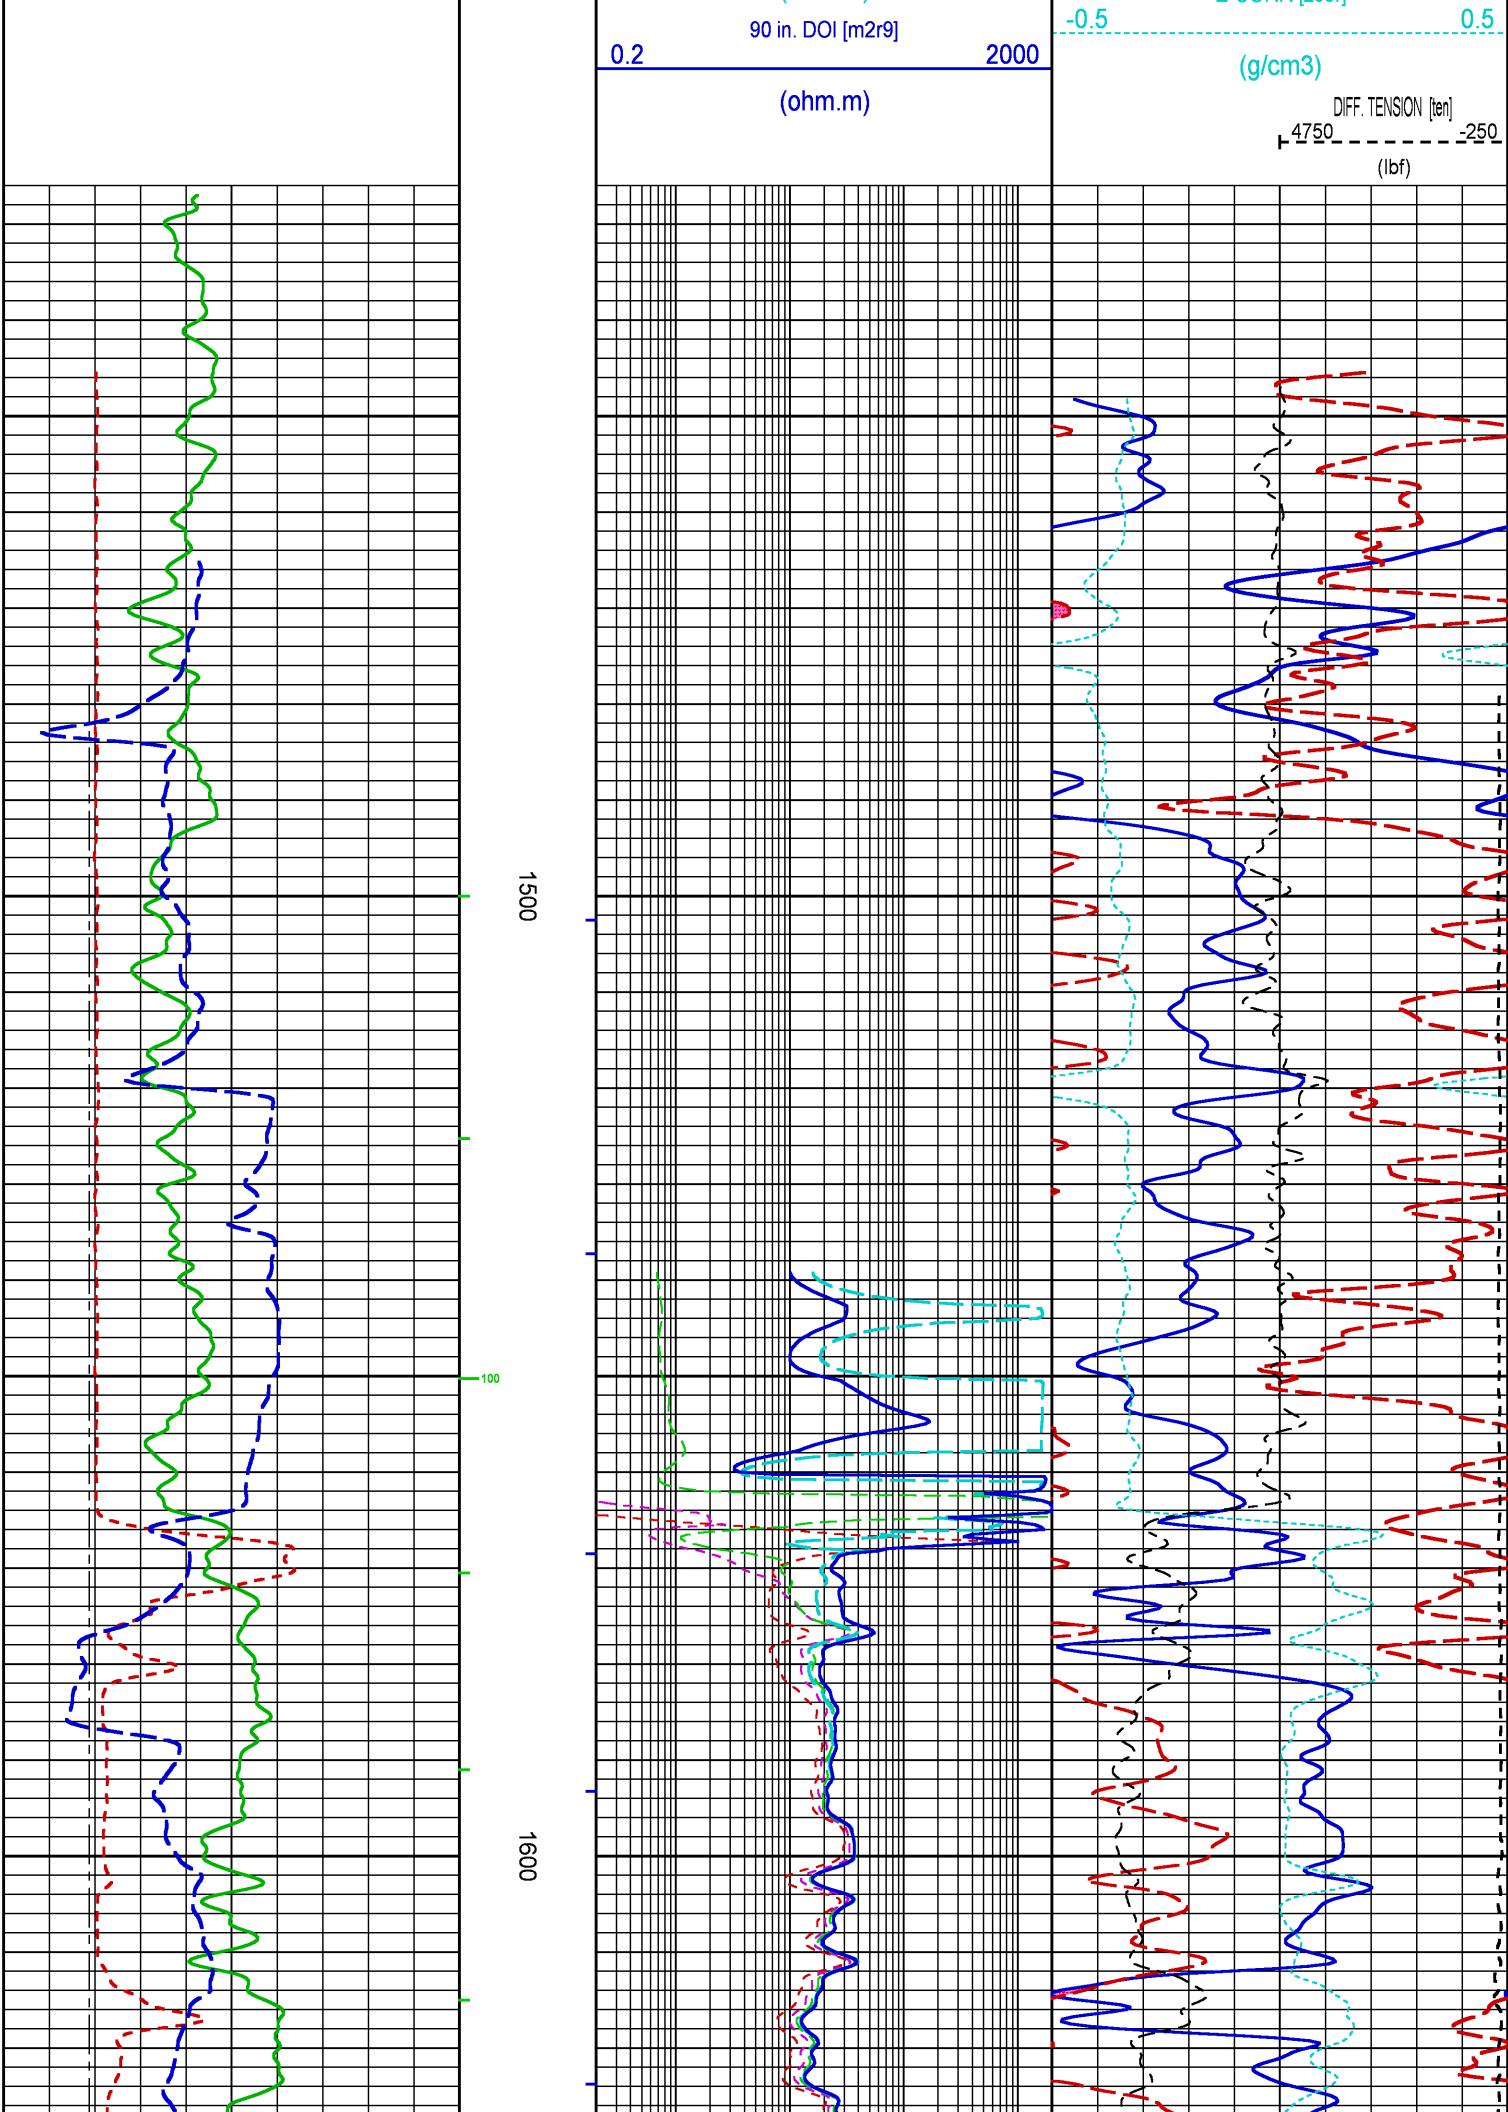

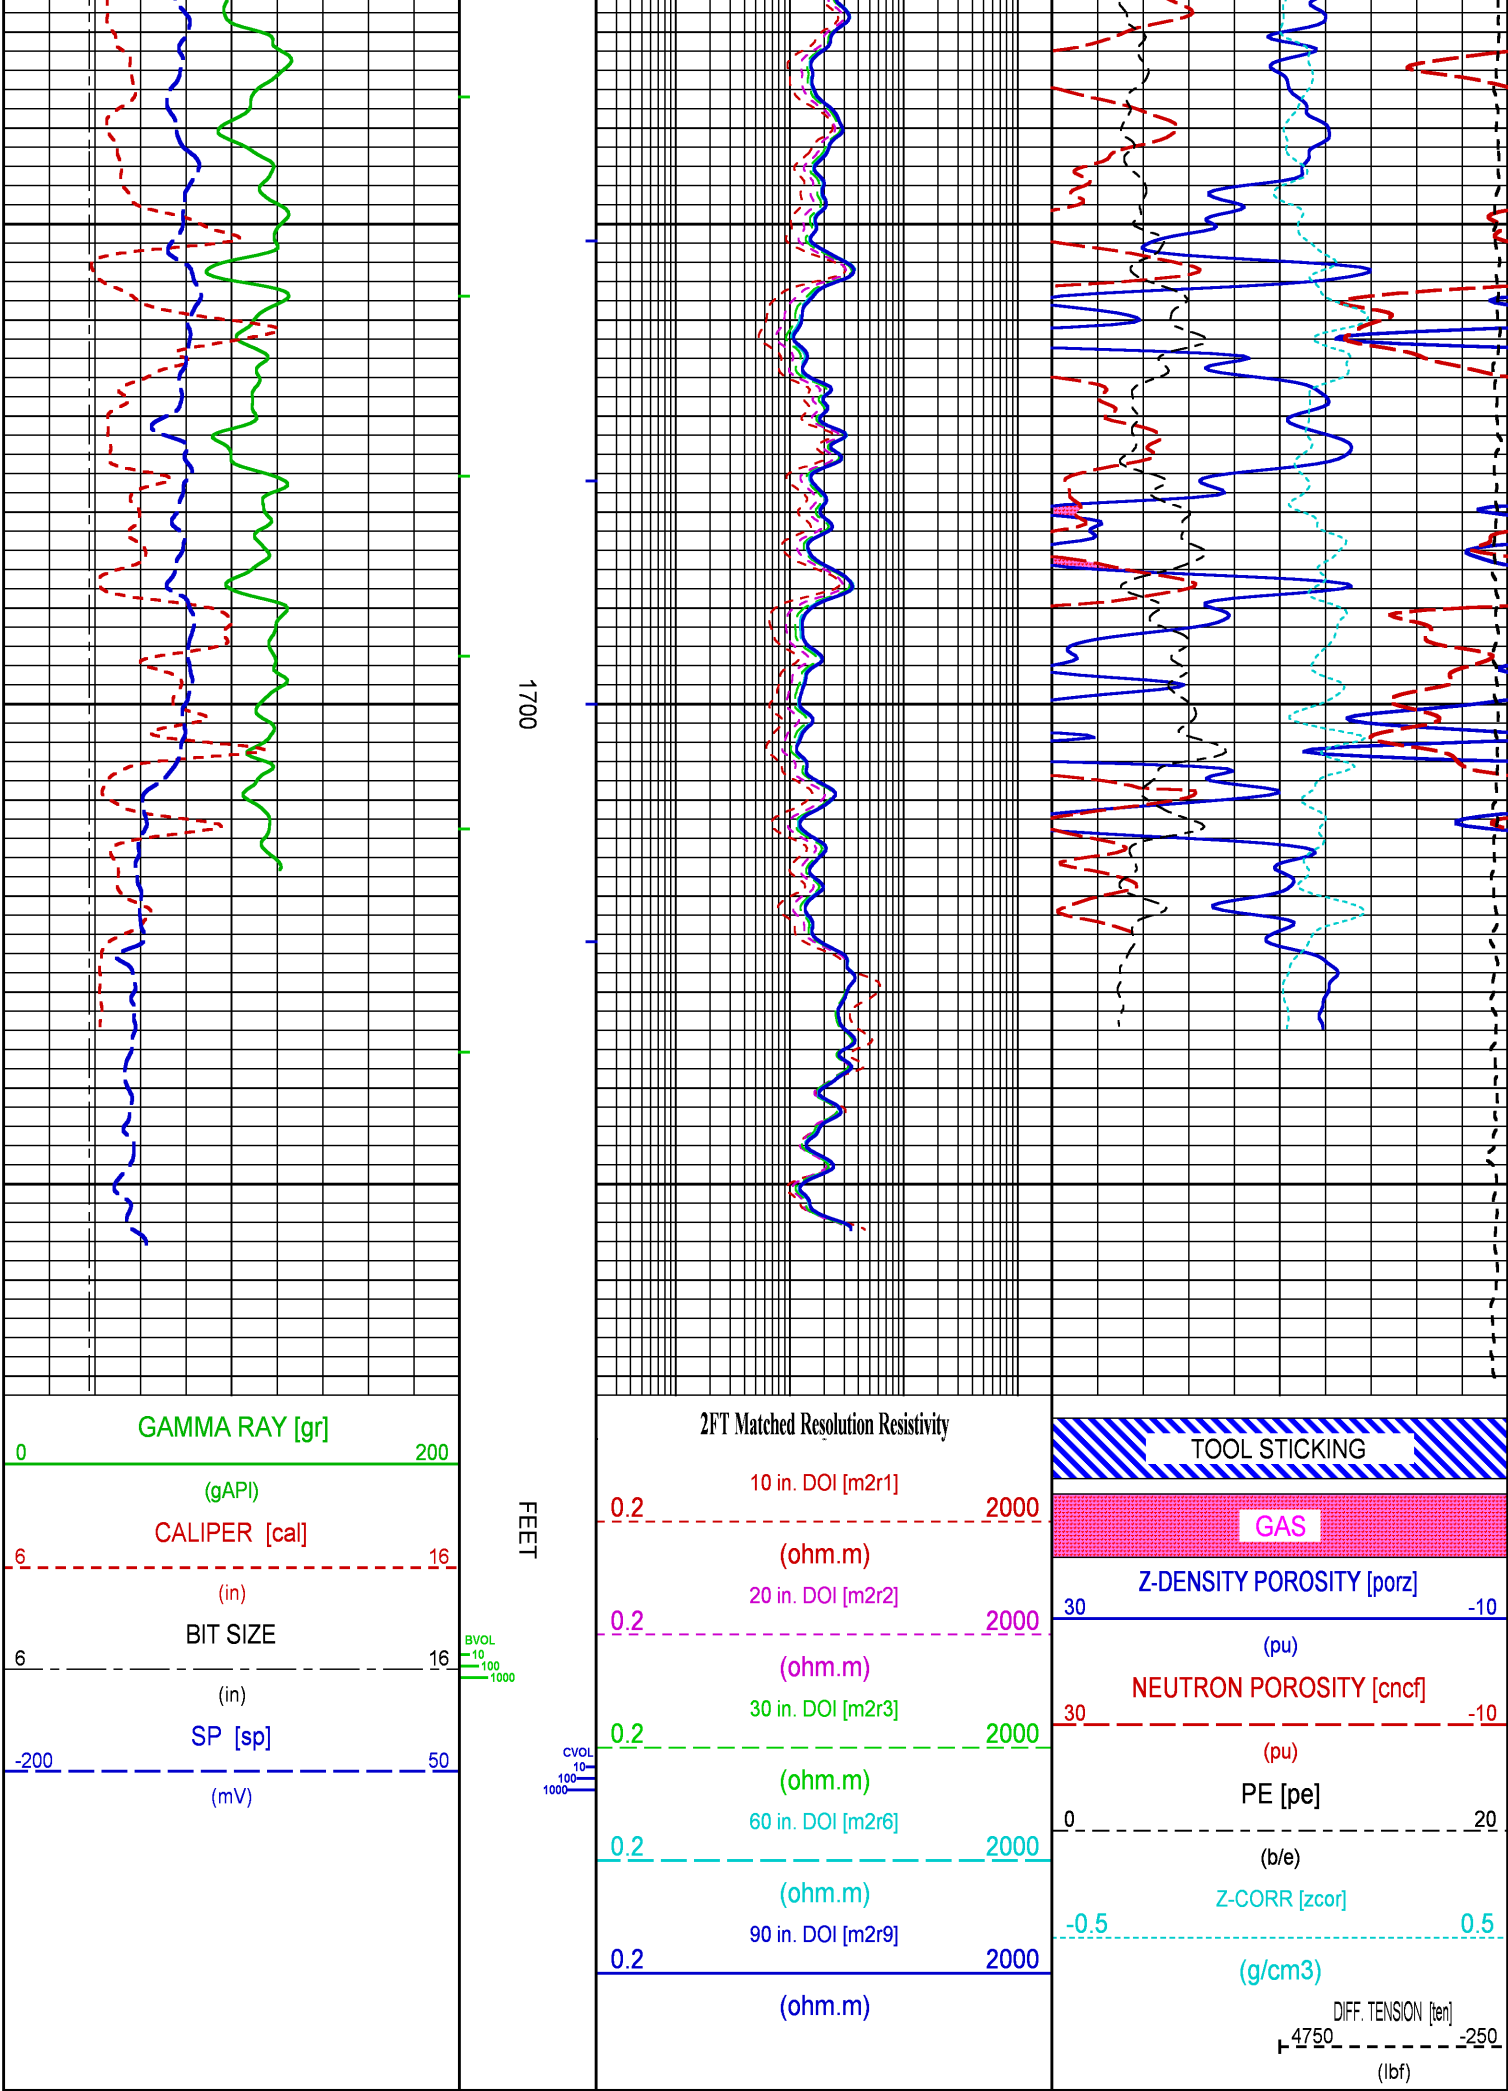

CALIBRATION / VERIFICATION SUMMARY

Source File: /dat1a/LARAMIE_NICHOLS_0994-24-11E/p777q.tp1

CHT PRIMARY CALIBRATION SUMMARY

TOOL #: 3981XA 10045153

DATE/TIME PERFORMED: Wed Dec 13 17:03:03 2017

UNIT #: CHANGE ME

	Signal Low (raw)	Signal High (raw)	Scale Mult	Scale Add	Engr Low (lbf)	Engr High (lbf)
CHT	120.40	464.62	2.77	-234.04	100.00	1055.00

GR PRIMARY CALIBRATION SUMMARY

TOOL #: 1329XA 363173

DATE/TIME PERFORMED: Mon Jan 29 11:55:52 2018

UNIT #: 3882TD HL6728

CALB JIG #: 4702NK DA_228

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	CR DIFF (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	CALBRTR (gAPI)
GR	203.07	1112.58	909.5	0.165	33.49	183.49	150
			830.0 960.0				

GR PRIMARY VERIFICATION SUMMARY

TOOL #: 1329XA 363173

DATE/TIME PERFORMED: Mon Jan 29 12:01:17 2018

UNIT #: 3882TD HL6728

VERI JIG #: 4702NK DA_228

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	DIFF. (gAPI)
GR	203.04	1121.80	0.165	33.49	185.01	151.52
						140.00 160.00

SLSP PRIMARY CALIBRATION SUMMARY

TOOL #: 1329XA 363173

DATE/TIME PERFORMED: Mon Jan 29 11:59:01 2018

UNIT #: 3882TD HL6728

CALIBRATOR ID: 4702NA DA_228

	Bkgnd (cts/s)	Cal ON (cts/s)	Mult (gAPI/(cts/s))	Bkgnd (gAPI)	Cal ON (gAPI)	Cal Value (gAPI)
GR-SL (.06-3.5)	197.50	1103.86	0.165	32.69	182.69	150

	Std Rate (cts/s)	Meas Rate (cts/s)	Tool Norm	Std Mult	Log Mult	App Con (pct ppm)
E (.25-3.0)	554	564.6	0.981 0.900 1.100			
K				0.01602	0.01572	8.900
U				0.03851	0.03779	21.300
TH				0.10135	0.09945	56.100

	Mult chnl/MeV	Add chnls	QSA	QCAL	GAIN	U Pk Res %	Flask Temp (degF)
SPECTRUM	70.232	3.701	0.764	1.004 0.980 1.020	2979	9.11	67.25

	P1 .352 MeV	P2 .609 MeV	P3 1.120 MeV	P4 1.765 MeV	P5 2.204 MeV
Std Pk	25.80	44.20	81.00	127.40	159.00
Meas Pk	27.67 22.80 28.80	46.74 40.20 48.20	83.03 76.00 86.00	128.19 121.40 133.40	157.78 152.00 166.00
Fit Pk	28.42	46.47	82.36	127.66	158.49

SLSP PRIMARY VERIFICATION SUMMARY

TOOL #: 1329XA 363173

DATE/TIME PERFORMED: Mon Jan 29 12:01:29 2018

UNIT #: 3882TD HL6728

CALIBRATOR ID: 4702NA DA_228

	Bkgnd (cts/s)	Cal ON (cts/s)	Mult (gAPI/(cts/s))	Bkgnd (gAPI)	Cal ON (gAPI)	Cal Value (gAPI)
GR-SL (.06-3.5)	199.85	1111.75	0.165	32.24	179.73	147 135 165

	Std rate	Meas rate	Tool norm	Std Mult	Log Mult	App Con (pct ppm)
E (.25-3.0)	554	570.8	0.981			
K				0.01602	0.01572	8.972 8.010 9.790
U				0.03851	0.03779	21.568 19.170 23.430
TH				0.10135	0.09945	56.763 50.490 61.710

	Mult chnl/MeV	Add chnls	QSA	QCAL	GAIN	U Pk Res %	Flask Temp (degF)
SPECTRUM	70.075	3.740	1.033	1.002	2979	7.33	67.54
				0.980 1.020			

	P1 .352 MeV	P2 .609 MeV	P3 1.120 MeV	P4 1.765 MeV	P5 2.204 MeV
Std Pk	25.80	44.20	81.00	127.40	159.00
Meas Pk	27.58	46.57	83.21	127.90	157.39
	22.80 28.80	40.20 48.20	76.00 86.00	121.40 133.40	152.00 166.00
Fit Pk	28.41	46.42	82.22	127.42	158.18

CN PRIMARY CALIBRATION SUMMARY

TOOL #: 2446XA 10342170 DATE/TIME PERFORMED: Mon Jan 29 14:26:55 2018

UNIT #: 3882TD HL6728 CALIBRATOR #: 2437XB 120052 SOURCE #: 4717XS N_923

	MEASURED CPS	DEADTM CORR CPS	DTC SSN/LSN	NOMINAL SSN/LSN	CORRECTION FACTOR	POROSITY (pu)
LSN	592.09	600.62				
SSN	1559.54	1609.75				
RATIO			2.68014	2.75100	1.02644	
					0.97000 1.07000	
CN						21.358

CN PRIMARY VERIFICATION SUMMARY

TOOL #: 2446XA 10342170 DATE/TIME PERFORMED: Mon Jan 29 14:31:41 2018

UNIT #: 3882TD HL6728 ICE BLOCK #: 4717ND D__043

	MEASURED CPS	DEADTM CORR CPS	DTC SSN/LSN	CORRECTION FACTOR	DTC CORR SSN/LSN	POROSITY (pu)
LSN	2017.73	2120.46				
SSN	4633.17	5106.45				
RATIO			2.40818	1.02644	2.47305	
CN						17.496

CAL PRIMARY CALIBRATION SUMMARY

CAL PRIMARY CALIBRATION SUMMARY

TOOL #: 2234XA 10231795

DATE/TIME PERFORMED: Tue Jan 30 15:40:58 2018

UNIT #: 3882TD HL6728

	SMALL RING	LARGE RING	MULT	ADD	SMALL RING	LARGE RING
					(in)	(in)
CALIPER	1246.4	2148.0	0.00800	-2.18924	7.785	15.000

CAL BEFORE LOG VERIFICATION SUMMARY

TOOL #: 2234XA 10231795

DATE/TIME PERFORMED: Fri Mar 9 20:36:41 2018

DAYS SINCE CAL: 38

UNIT #: 5753XD 111111

	I.D.	MULT	ADD	I.D.
				(in)
CALIPER	1342.8	0.00800	-2.72868	8.017

CAL AFTER LOG VERIFICATION SUMMARY

TOOL #: 2234XA 10231795

DATE/TIME PERFORMED: Sat Mar 10 14:59:37 2018

DAYS SINCE CAL: 38

UNIT #: 5753XD 111111

	I.D.	MULT	ADD	I.D.
				(in)
CALIPER	1300.4	0.00800	-2.72868	7.678
				7.517 8.517

ZDL PRIMARY CALIBRATION SUMMARY

TOOL: 2234XA 10231795

DATE/TIME PERFORMED: Tue Jan 30 16:11:01 2018

UNIT: 3882TD HL6728

CALB BLKS: 2225XA B94287

CS SRC: 4703NT 11344B

	SS CS PK (Channel)	LS CS PK (Channel)	SS_BKGD (cps)	LS BKGD (cps)		
	224.0	224.1	1250.9	1425.7		
	220.0 230.0	220.0 230.0				
	SS (cps)	LS (cps)	SHR	DEN (g/cm3)	CORR (g/cm3)	PE (b/e)
MG (LO PE)	19182.0	9964.5	0.594	1.700	0.003	2.160
			0.565 0.665			
AL	11117.9	997.1		2.698	-0.010	

AL + SHIM

15429.0

1744.2

2.619

0.158

MG + SHIM (HI PE)

9216.3

4653.2

0.235

8.500

0.210 0.270

RATIO AL + SHIM/AL

1.39

1.75

1.32 1.42

1.64 1.84

RATIO MG/AL

1.73

9.99

1.65 1.78

9.40 10.20

ZDL BEFORE LOG VERIFICATION SUMMARY

TOOL #: 2234XA 10231795

DATE/TIME PERFORMED: Fri Mar 9 20:03:40 2018

DAYS SINCE CAL: 38

UNIT #: 5753XD 111111

	TOTAL (cps)	CSPK (Channel)	HV (V)
LS	1425.9 1325.7 1525.7	225.8 220.0 230.0	1254.1 1100.0 1550.0
SS	1247.6 1150.9 1350.9	224.7 220.0 230.0	1232.4 1100.0 1550.0
	LV (V) 5.0 4.8 5.2	PAD CURRENT (mA) 71.3 50.0 120.0	

ZDL AFTER LOG VERIFICATION SUMMARY

TOOL #: 2234XA 10231795

DATE/TIME PERFORMED: Sat Mar 10 15:16:55 2018

DAYS SINCE CAL: 38

UNIT #: 5753XD 111111

	TOTAL (cps)	CSPK (Channel)	HV (V)
LS	1412.1 1325.7 1525.7	223.7 220.0 230.0	1260.6 1100.0 1550.0
SS	1246.9 1150.9 1350.9	220.7 220.0 230.0	1235.9 1100.0 1550.0
	LV (V) 5.0 4.8 5.2	PAD CURRENT (mA) 68.8 50.0 120.0	

HDIL PRIMARY CALIBRATION SUMMARY

TOOL #: 1515MA 179553

DATE/TIME PERFORMED: Wed Feb 7 17:00:03 2018

UNIT #: CHANGE ME

GRCOND ID & DATE: a.110 082996

ZERO DATA(mv)	10 KHz		30 KHz		50 KHz		70 KHz		90 KHz		110 KHz		130 KHz		150 KHz	
Coil 0 R	-0.005		0.001		0.002		0.000		-0.002		-0.000		-0.000		-0.002	
	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 0 Q	0.007		0.010		0.002		0.001		0.003		0.002		0.001		0.001	
	-1.000	1.000	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 1 R	0.003		0.010		0.009		0.009		0.007		0.007		0.006		0.005	
	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 1 Q	-0.000		0.001		-0.001		0.002		0.002		0.002		0.001		-0.001	
	-1.000	1.000	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 2 R	0.007		0.002		-0.003		-0.002		-0.001		-0.001		0.001		0.005	
	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 2 Q	-0.007		-0.005		-0.002		0.000		-0.004		-0.004		-0.004		-0.003	
	-1.000	1.000	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 3 R	0.003		0.005		0.003		0.007		0.006		0.002		0.001		0.001	
	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 3 Q	-0.010		-0.009		-0.003		-0.000		0.003		0.004		-0.000		0.001	
	-0.500	0.500	-0.200	0.200	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100	-0.100	0.100
Coil 4 R	-0.004		0.003		0.004		0.003		-0.001		0.006		0.002		0.005	
	-0.200	0.200	-0.200	0.200	-0.200	0.200	-0.200	0.200	-0.200	0.200	-0.200	0.200	-0.200	0.200	-0.200	0.200
Coil 4 Q	-0.017		0.004		-0.006		-0.004		0.003		-0.005		-0.007		-0.001	
	-1.000	1.000	-0.400	0.400	-0.200	0.200	-0.200	0.200	-0.200	0.200	-0.200	0.200	-0.200	0.200	-0.200	0.200
Coil 5 R	-0.014		0.002		0.006		0.012		0.000		0.001		0.003		-0.002	
	-0.400	0.400	-0.400	0.400	-0.400	0.400	-0.400	0.400	-0.400	0.400	-0.400	0.400	-0.400	0.400	-0.400	0.400
Coil 5 Q	-0.014		0.007		-0.007		-0.007		0.010		0.010		0.004		0.001	
	-2.000	2.000	-0.800	0.800	-0.400	0.400	-0.400	0.400	-0.400	0.400	-0.400	0.400	-0.400	0.400	-0.400	0.400
Coil 6 R	-0.020		0.006		-0.023		-0.026		-0.020		0.000		0.019		0.025	
	-1.000	1.000	-1.000	1.000	-1.000	1.000	-1.000	1.000	-1.000	1.000	-1.000	1.000	-1.000	1.000	-1.000	1.000
Coil 6 Q	-0.014		-0.002		-0.029		-0.002		-0.033		-0.025		-0.017		-0.005	
	-5.000	5.000	-2.000	2.000	-1.000	1.000	-1.000	1.000	-1.000	1.000	-1.000	1.000	-1.000	1.000	-1.000	1.000

ELEC. GAINS	10 KHz		30 KHz		50 KHz		70 KHz		90 KHz		110 KHz		130 KHz		150 KHz	
Coil 0 M	125.72		124.16		121.20		116.84		111.27		104.62		97.01		88.75	
	100.00	150.00	100.00	150.00	98.00	150.00	96.00	140.00	92.00	140.00	87.00	130.00	82.00	120.00	76.00	110.00
Coil 0 P	8.004		25.137		41.974		58.696		75.258		91.759		108.047		124.186	
	6.000	9.000	19.000	28.000	32.000	47.000	44.000	66.000	57.000	85.000	70.000	100.000	82.000	120.000	95.000	140.000
Coil 1 M	216.48		213.99		209.07		201.94		192.67		181.57		168.69		154.47	
	180.00	270.00	180.00	270.00	170.00	260.00	170.00	250.00	160.00	250.00	160.00	230.00	150.00	220.00	140.00	200.00
Coil 1 P	7.960		25.006		41.797		58.493		75.068		91.588		107.945		124.155	
	6.000	9.000	19.000	28.000	32.000	48.000	45.000	67.000	57.000	86.000	70.000	110.000	83.000	120.000	96.000	140.000
Coil 2 M	427.47		422.77		413.70		400.70		384.01		364.40		341.98		317.62	
	360.00	540.00	360.00	540.00	350.00	530.00	340.00	510.00	330.00	500.00	310.00	470.00	300.00	440.00	270.00	410.00
Coil 2 P	7.685		24.162		40.353		56.408		72.302		88.146		103.797		119.435	
	6.000	9.000	19.000	29.000	32.000	48.000	45.000	67.000	58.000	87.000	71.000	110.000	84.000	130.000	96.000	140.000
Coil 3 M	699.65		691.29		675.10		651.62		621.04		584.48		542.47		495.93	
	590.00	880.00	580.00	870.00	570.00	850.00	550.00	830.00	530.00	800.00	500.00	760.00	470.00	710.00	440.00	650.00
Coil 3 P	8.184		25.684		42.919		60.057		77.052		94.032		110.781		127.426	
	6.000	10.000	20.000	29.000	33.000	49.000	46.000	69.000	59.000	89.000	72.000	110.000	85.000	130.000	98.000	150.000
Coil 4 M	1139.9		1126.2		1099.4		1060.8		1010.8		951.2		883.0		807.6	
	900.0	1400.0	900.0	1300.0	900.0	1300.0	850.0	1300.0	800.0	1200.0	800.0	1200.0	750.0	1100.0	700.0	1000.0
Coil 4 P	8.284		26.053		43.517		60.883		78.097		95.262		112.229		129.081	
	6.000	10.000	20.000	30.000	33.000	50.000	46.000	70.000	60.000	90.000	73.000	110.000	86.000	130.000	99.000	150.000
Coil 5 M	2276.1		2249.1		2195.7		2118.8		2018.9		1899.7		1762.8		1611.2	
	1900.0	2800.0	1800.0	2800.0	1800.0	2700.0	1800.0	2600.0	1700.0	2500.0	1600.0	2400.0	1500.0	2200.0	1400.0	2100.0
Coil 5 P	8.462		26.520		44.242		62.044		79.640		97.126		114.455		131.792	
	6.000	10.000	20.000	30.000	33.000	50.000	46.000	70.000	60.000	90.000	73.000	110.000	86.000	130.000	99.000	150.000

Coil 5 P	8.462	26.539	44.343	62.044	79.610	97.136	114.455	131.703
	6.000 10.000	20.000 31.000	34.000 51.000	48.000 72.000	62.000 93.000	76.000 110.000	89.000 130.000	100.000 150.000
Coil 6 M	5914.1	5838.5	5690.3	5480.9	5213.0	4903.2	4555.9	4171.7
	4700.0 7100.0	4700.0 7000.0	4600.0 6900.0	4400.0 6600.0	4200.0 6400.0	4000.0 6000.0	3700.0 5600.0	3400.0 5100.0
Coil 6 P	8.374	26.536	44.311	61.930	79.325	96.647	113.721	130.689
	7.000 10.000	22.000 32.000	36.000 54.000	51.000 76.000	65.000 98.000	80.000 120.000	94.000 140.000	110.000 160.000

AM Factor 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 R	610	28	-64	-102	-123	-135	-141	-146
	-200 800	-500 200	-600 100	-600 50	-500 20	-500 20	-500 20	-500 20
Coil 0 Q	1795	705	428	287	195	126	71	24
	-3000 6000	-1000 2000	-1000 1200	-500 900	-400 700	-400 600	-400 500	-400 400
Coil 1 R	553	84	22	0	-9	-15	-18	-21
	450 650	20 130	-30 60	-50 40	-55 30	-60 20	-60 10	-60 10
Coil 1 Q	1009	417	262	188	145	116	95	77
	0 2500	0 900	0 600	0 450	0 350	0 300	0 250	0 250
Coil 2 R	192.5	31.5	10.1	2.5	-1.1	-3.2	-4.7	-5.5
	140.0 230.0	0.0 51.0	-10.0 25.0	-15.0 15.0	-16.0 10.0	-16.0 7.0	-16.0 5.0	-16.0 3.0
Coil 2 Q	375.2	156.4	101.6	76.8	62.9	54.3	48.3	44.3
	-200.0 1000.0	0.0 350.0	0.0 220.0	0.0 160.0	0.0 130.0	0.0 110.0	0.0 100.0	0.0 90.0
Coil 3 R	47.3	6.4	1.4	-0.1	-0.8	-1.3	-1.8	-2.2
	37.0 62.0	0.0 12.0	-3.0 6.0	-4.0 4.0	-5.0 2.0	-5.0 1.0	-6.0 1.0	-6.0 1.0
Coil 3 Q	94.6	40.8	29.0	24.8	23.5	23.5	24.1	24.6
	-140.0 280.0	-40.0 100.0	-20.0 70.0	-10.0 60.0	-10.0 50.0	-10.0 50.0	-10.0 50.0	-10.0 50.0
Coil 4 R	11.80	1.16	-0.12	-0.64	-0.98	-1.05	-1.26	-1.37
	2.00 18.00	-3.00 6.00	-3.50 3.00	-3.90 2.00	-4.20 2.00	-4.50 2.00	-4.70 2.00	-5.00 2.00
Coil 4 Q	22.26	12.15	11.57	12.42	13.86	15.61	17.53	19.51
	-100.00 100.00	-30.00 50.00	-20.00 40.00	-10.00 40.00	-10.00 40.00	-10.00 45.00	-10.00 50.00	-10.00 60.00
Coil 5 R	1.45	-0.86	-0.86	-0.84	-0.93	-0.82	-0.86	-0.85
	-2.00 5.80	-3.20 2.40	-4.50 3.10	-4.70 3.20	-4.80 3.20	-5.00 3.30	-5.20 3.40	-5.40 3.50
Coil 5 Q	4.99	4.70	6.40	8.39	10.42	12.61	14.87	16.98
	-60.00 70.00	-20.00 30.00	-20.00 30.00	-20.00 35.00	-20.00 45.00	-20.00 50.00	-20.00 60.00	-30.00 70.00
Coil 6 R	-1.82	-0.32	-0.00	-0.11	-0.16	-0.23	-0.40	-0.60
	-4.80 1.00	-5.70 3.80	-6.50 4.90	-6.90 5.40	-7.30 5.80	-7.50 6.00	-7.70 6.10	-7.90 6.30
Coil 6 Q	-3.99	1.05	3.88	6.49	8.84	11.16	13.45	15.73
	-30.00 30.00	-20.00 25.00	-20.00 35.00	-30.00 50.00	-35.00 60.00	-40.00 70.00	-50.00 80.00	-60.00 100.00

MM Factor 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	1.010	1.007	1.003	1.002	1.001	0.999	0.998	1.000
	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100
Coil 0 P	0.077	0.248	0.351	0.320	0.278	0.258	0.206	0.172
	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000
Coil 1 M	0.988	0.986	0.981	0.981	0.979	0.978	0.977	0.978
	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100
Coil 1 P	0.108	0.245	0.293	0.292	0.250	0.167	0.130	0.070
	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000
Coil 2 M	1.002	0.999	0.998	0.996	0.995	0.994	0.993	0.993
	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100
Coil 2 P	0.060	0.117	0.173	0.222	0.262	0.254	0.224	0.272
	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000
Coil 3 M	1.010	1.009	1.008	1.007	1.006	1.005	1.005	1.006
	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100	0.900 1.100
Coil 3 P	0.046	0.094	0.155	0.197	0.205	0.179	0.129	0.193
	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000	-2.000 2.000
Coil 4 M	1.026	1.025	1.025	1.024	1.023	1.023	1.022	1.022

Coil 4 M	<div>0.9001.100</div>	<div>0.9001.100</div>	<div>0.9001.100</div>	<div>0.9001.100</div>	<div>0.9001.100</div>	<div>0.9001.100</div>	<div>0.9001.100</div>	<div>0.9001.100</div>
Coil 4 P	<div>0.073-2.0002.000</div>	<div>0.112-2.0002.000</div>	<div>0.115-2.0002.000</div>	<div>0.170-2.0002.000</div>	<div>0.178-2.0002.000</div>	<div>0.169-2.0002.000</div>	<div>0.155-2.0002.000</div>	<div>0.150-2.0002.000</div>
Coil 5 M	<div>1.0210.9001.100</div>	<div>1.0200.9001.100</div>	<div>1.0200.9001.100</div>	<div>1.0190.9001.100</div>	<div>1.0180.9001.100</div>	<div>1.0190.9001.100</div>	<div>1.0170.9001.100</div>	<div>1.0170.9001.100</div>
Coil 5 P	<div>0.093-2.0002.000</div>	<div>0.020-2.0002.000</div>	<div>0.082-2.0002.000</div>	<div>0.099-2.0002.000</div>	<div>0.076-2.0002.000</div>	<div>-0.000-2.0002.000</div>	<div>0.036-2.0002.000</div>	<div>0.046-2.0002.000</div>
Coil 6 M	<div>1.0160.9001.100</div>	<div>1.0180.9001.100</div>	<div>1.0160.9001.100</div>	<div>1.0150.9001.100</div>	<div>1.0140.9001.100</div>	<div>1.0200.9001.100</div>	<div>1.0210.9001.100</div>	<div>1.0200.9001.100</div>
Coil 6 P	<div>0.038-2.0002.000</div>	<div>0.150-2.0002.000</div>	<div>0.096-2.0002.000</div>	<div>0.192-2.0002.000</div>	<div>0.084-2.0002.000</div>	<div>-0.005-2.0002.000</div>	<div>0.004-2.0002.000</div>	<div>-0.132-2.0002.000</div>

PARMS	TCID 0	TCID 1	Cal Temp	T Factor
			(degF)	
IDs	1.414	0.852	52.1	1.04

HDIL BEFORE LOG VERIFICATION SUMMARY

TOOL #:	1515MA 179553	DATE/TIME PERFORMED:	Fri Mar 9 20:06:00 2018	DAYS SINCE CAL:	30
	UNIT #: 5753XD 111111				

ZERO DATA(mv)	10 KHz	30 KHz	50 KHz	70 KHz	90 KHz	110 KHz	130 KHz	150 KHz
Coil 0 R	<div>0.007-0.2000.200</div>	<div>0.005-0.1000.100</div>	<div>0.002-0.1000.100</div>	<div>-0.002-0.1000.100</div>	<div>-0.005-0.1000.100</div>	<div>-0.004-0.1000.100</div>	<div>-0.004-0.1000.100</div>	<div>-0.002-0.1000.100</div>
Coil 0 Q	<div>0.005-1.0001.000</div>	<div>0.008-0.2000.200</div>	<div>0.006-0.1000.100</div>	<div>0.006-0.1000.100</div>	<div>0.005-0.1000.100</div>	<div>0.001-0.1000.100</div>	<div>-0.003-0.1000.100</div>	<div>-0.002-0.1000.100</div>
Coil 1 R	<div>0.007-0.2000.200</div>	<div>0.007-0.1000.100</div>	<div>0.006-0.1000.100</div>	<div>0.003-0.1000.100</div>	<div>-0.000-0.1000.100</div>	<div>-0.002-0.1000.100</div>	<div>0.000-0.1000.100</div>	<div>0.002-0.1000.100</div>
Coil 1 Q	<div>0.002-1.0001.000</div>	<div>0.004-0.2000.200</div>	<div>0.005-0.1000.100</div>	<div>0.004-0.1000.100</div>	<div>0.003-0.1000.100</div>	<div>-0.001-0.1000.100</div>	<div>-0.004-0.1000.100</div>	<div>-0.006-0.1000.100</div>
Coil 2 R	<div>0.008-0.2000.200</div>	<div>0.006-0.1000.100</div>	<div>0.001-0.1000.100</div>	<div>-0.002-0.1000.100</div>	<div>-0.001-0.1000.100</div>	<div>-0.003-0.1000.100</div>	<div>0.001-0.1000.100</div>	<div>0.005-0.1000.100</div>
Coil 2 Q	<div>-0.004-1.0001.000</div>	<div>0.001-0.2000.200</div>	<div>0.004-0.1000.100</div>	<div>0.004-0.1000.100</div>	<div>0.000-0.1000.100</div>	<div>-0.004-0.1000.100</div>	<div>-0.006-0.1000.100</div>	<div>-0.003-0.1000.100</div>
Coil 3 R	<div>-0.007-0.1000.100</div>	<div>0.003-0.1000.100</div>	<div>0.006-0.1000.100</div>	<div>0.004-0.1000.100</div>	<div>0.003-0.1000.100</div>	<div>0.003-0.1000.100</div>	<div>0.000-0.1000.100</div>	<div>-0.004-0.1000.100</div>
Coil 3 Q	<div>-0.004-0.5000.500</div>	<div>-0.008-0.2000.200</div>	<div>-0.001-0.1000.100</div>	<div>0.000-0.1000.100</div>	<div>0.002-0.1000.100</div>	<div>0.001-0.1000.100</div>	<div>0.001-0.1000.100</div>	<div>-0.001-0.1000.100</div>
Coil 4 R	<div>-0.008-0.2000.200</div>	<div>-0.007-0.2000.200</div>	<div>-0.001-0.2000.200</div>	<div>-0.001-0.2000.200</div>	<div>-0.004-0.2000.200</div>	<div>-0.005-0.2000.200</div>	<div>0.002-0.2000.200</div>	<div>0.004-0.2000.200</div>
Coil 4 Q	<div>0.002-1.0001.000</div>	<div>0.010-0.4000.400</div>	<div>-0.001-0.2000.200</div>	<div>-0.001-0.2000.200</div>	<div>-0.002-0.2000.200</div>	<div>0.002-0.2000.200</div>	<div>-0.003-0.2000.200</div>	<div>0.000-0.2000.200</div>
Coil 5 R	<div>-0.007-0.4000.400</div>	<div>0.008-0.4000.400</div>	<div>-0.014-0.4000.400</div>	<div>-0.000-0.4000.400</div>	<div>0.004-0.4000.400</div>	<div>-0.001-0.4000.400</div>	<div>-0.006-0.4000.400</div>	<div>-0.008-0.4000.400</div>
Coil 5 Q	<div>-0.017-2.0002.000</div>	<div>-0.001-0.8000.800</div>	<div>0.002-0.4000.400</div>	<div>0.005-0.4000.400</div>	<div>0.016-0.4000.400</div>	<div>0.009-0.4000.400</div>	<div>-0.001-0.4000.400</div>	<div>0.004-0.4000.400</div>
Coil 6 R	<div>-0.008-1.0001.000</div>	<div>0.016-1.0001.000</div>	<div>-0.016-1.0001.000</div>	<div>0.002-1.0001.000</div>	<div>-0.026-1.0001.000</div>	<div>-0.013-1.0001.000</div>	<div>0.008-1.0001.000</div>	<div>0.011-1.0001.000</div>
Coil 6 Q	<div>-0.031-5.0005.000</div>	<div>0.014-2.0002.000</div>	<div>0.003-1.0001.000</div>	<div>-0.002-1.0001.000</div>	<div>-0.014-1.0001.000</div>	<div>-0.006-1.0001.000</div>	<div>-0.006-1.0001.000</div>	<div>-0.002-1.0001.000</div>

ELEC. GAINS 10 KHZ 30 KHZ 50 KHZ 70 KHZ 90 KHZ 110 KHZ 130 KHZ 150 KHZ

Coil 0 M	126.14	124.56	121.57	117.01	111.49	104.67	97.15	88.56
	100.00 150.00	100.00 150.00	98.00 150.00	96.00 140.00	92.00 140.00	87.00 130.00	82.00 120.00	76.00 110.00
Coil 0 P	8.006	25.053	41.817	58.468	74.956	91.385	107.569	123.715
	6.000 9.000	19.000 28.000	32.000 47.000	44.000 66.000	57.000 85.000	70.000 100.000	82.000 120.000	95.000 140.000
Coil 1 M	219.12	216.51	211.56	204.08	194.81	183.28	170.48	155.57
	180.00 270.00	180.00 270.00	170.00 260.00	170.00 250.00	160.00 250.00	160.00 230.00	150.00 220.00	140.00 200.00
Coil 1 P	7.964	24.986	41.739	58.404	74.924	91.463	107.686	124.023
	6.000 9.000	19.000 28.000	32.000 48.000	45.000 67.000	57.000 86.000	70.000 110.000	83.000 120.000	96.000 140.000
Coil 2 M	433.54	428.68	419.46	405.71	388.98	368.59	346.21	320.64
	360.00 540.00	360.00 540.00	350.00 530.00	340.00 510.00	330.00 500.00	310.00 470.00	300.00 440.00	270.00 410.00
Coil 2 P	7.712	24.180	40.386	56.433	72.318	88.156	103.777	119.515
	6.000 9.000	19.000 29.000	32.000 48.000	45.000 67.000	58.000 87.000	71.000 110.000	84.000 130.000	96.000 140.000
Coil 3 M	707.43	698.75	682.45	657.48	626.97	589.24	547.17	498.86
	590.00 880.00	580.00 870.00	570.00 850.00	550.00 830.00	530.00 800.00	500.00 760.00	470.00 710.00	440.00 650.00
Coil 3 P	8.204	25.716	42.940	60.081	77.064	94.034	110.718	127.493
	6.000 10.000	20.000 29.000	33.000 49.000	46.000 69.000	59.000 89.000	72.000 110.000	85.000 130.000	98.000 150.000
Coil 4 M	1141.3	1127.3	1100.7	1060.3	1010.3	949.3	881.7	804.4
	900.0 1400.0	900.0 1300.0	900.0 1300.0	850.0 1300.0	800.0 1200.0	800.0 1200.0	750.0 1100.0	700.0 1000.0
Coil 4 P	8.281	26.033	43.462	60.794	77.962	95.104	111.974	128.899
	6.000 10.000	20.000 30.000	33.000 50.000	46.000 70.000	60.000 90.000	73.000 110.000	88.000 130.000	99.000 150.000
Coil 5 M	2292.0	2264.1	2210.5	2129.4	2030.6	1907.3	1771.3	1614.3
	1900.0 2800.0	1800.0 2800.0	1800.0 2700.0	1800.0 2600.0	1700.0 2500.0	1600.0 2400.0	1500.0 2200.0	1400.0 2100.0
Coil 5 P	8.447	26.493	44.246	61.913	79.424	96.906	114.138	131.430
	6.000 10.000	20.000 31.000	34.000 51.000	48.000 72.000	62.000 93.000	76.000 110.000	89.000 130.000	100.000 150.000
Coil 6 M	5922.2	5843.8	5696.0	5478.5	5213.4	4896.2	4549.9	4157.6
	4700.0 7100.0	4700.0 7000.0	4600.0 6900.0	4400.0 6600.0	4200.0 6400.0	4000.0 6000.0	3700.0 5600.0	3400.0 5100.0
Coil 6 P	8.322	26.373	44.016	61.511	78.773	95.978	112.836	129.821
	7.000 10.000	22.000 32.000	36.000 54.000	51.000 76.000	65.000 98.000	80.000 120.000	94.000 140.000	110.000 160.000

HDIL AFTER LOG VERIFICATION SUMMARY

TOOL #: 1515MA 179553 DATE/TIME PERFORMED: Sat Mar 10 14:51:25 2018 DAYS SINCE CAL: 30

UNIT #: 5753XD 111111

ZERO DATA(mv)	10 KHz	30 KHz	50 KHz	70 KHz	90 KHz	110 KHz	130 KHz	150 KHz
Coil 0 R	0.004	0.001	0.001	-0.000	-0.003	-0.002	-0.002	-0.004
	-0.073 0.087	-0.055 0.065	-0.028 0.032	-0.032 0.028	-0.035 0.025	-0.034 0.026	-0.034 0.026	-0.032 0.028
Coil 0 Q	0.004	0.005	0.002	0.003	0.005	0.001	0.001	-0.001
	-0.035 0.045	-0.112 0.128	-0.024 0.036	-0.024 0.036	-0.025 0.035	-0.029 0.031	-0.033 0.027	-0.032 0.028
Coil 1 R	0.001	0.003	0.002	0.003	0.001	-0.000	-0.000	0.001
	-0.073 0.087	-0.043 0.057	-0.024 0.036	-0.027 0.033	-0.030 0.030	-0.032 0.028	-0.030 0.030	-0.028 0.032
Coil 1 Q	-0.000	0.001	0.001	0.003	0.003	0.001	-0.001	-0.003
	-0.398 0.402	-0.096 0.104	-0.025 0.035	-0.026 0.034	-0.027 0.033	-0.031 0.029	-0.034 0.026	-0.036 0.024
Coil 2 R	0.001	0.003	0.002	-0.002	-0.000	-0.001	-0.001	0.004
	-0.062 0.078	-0.024 0.036	-0.029 0.031	-0.032 0.028	-0.031 0.029	-0.033 0.027	-0.029 0.031	-0.025 0.035
Coil 2 Q	-0.004	0.000	0.001	0.000	-0.000	-0.003	-0.002	-0.003
	-0.354 0.346	-0.099 0.101	-0.026 0.034	-0.026 0.034	-0.030 0.030	-0.034 0.026	-0.036 0.024	-0.033 0.027
Coil 3 R	-0.004	0.001	0.005	0.004	0.004	0.001	-0.001	-0.003
	-0.047 0.033	-0.037 0.043	-0.034 0.046	-0.036 0.044	-0.037 0.043	-0.037 0.043	-0.040 0.040	-0.044 0.036
Coil 3 Q	-0.003	-0.004	-0.002	0.003	0.003	0.001	-0.000	-0.002
	-0.204 0.196	-0.088 0.072	-0.041 0.039	-0.040 0.040	-0.038 0.042	-0.039 0.041	-0.039 0.041	-0.041 0.039
Coil 4 R	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005
	-0.047 0.033	-0.037 0.043	-0.034 0.046	-0.036 0.044	-0.037 0.043	-0.037 0.043	-0.040 0.040	-0.044 0.036
Coil 4 Q	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005
	-0.047 0.033	-0.037 0.043	-0.034 0.046	-0.036 0.044	-0.037 0.043	-0.037 0.043	-0.040 0.040	-0.044 0.036
Coil 5 R	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005
	-0.047 0.033	-0.037 0.043	-0.034 0.046	-0.036 0.044	-0.037 0.043	-0.037 0.043	-0.040 0.040	-0.044 0.036
Coil 5 Q	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005
	-0.047 0.033	-0.037 0.043	-0.034 0.046	-0.036 0.044	-0.037 0.043	-0.037 0.043	-0.040 0.040	-0.044 0.036
Coil 6 R	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005
	-0.047 0.033	-0.037 0.043	-0.034 0.046	-0.036 0.044	-0.037 0.043	-0.037 0.043	-0.040 0.040	-0.044 0.036
Coil 6 Q	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005	-0.005
	-0.047 0.033	-0.037 0.043	-0.034 0.046	-0.036 0.044	-0.037 0.043	-0.037 0.043	-0.040 0.040	-0.044 0.036

Coil 4 R	-0.007	-0.007	-0.000	-0.003	-0.002	-0.003	-0.001	-0.001
	-0.068 0.052	-0.067 0.053	-0.061 0.059	-0.061 0.059	-0.064 0.056	-0.065 0.055	-0.058 0.062	-0.056 0.064
Coil 4 Q	0.003	0.009	0.000	0.003	0.004	-0.005	-0.009	-0.002
	-0.298 0.302	-0.090 0.110	-0.061 0.059	-0.061 0.059	-0.062 0.058	-0.058 0.062	-0.063 0.057	-0.060 0.060
Coil 5 R	-0.009	0.000	0.008	0.007	-0.002	-0.002	-0.004	-0.001
	-0.127 0.113	-0.112 0.128	-0.134 0.106	-0.120 0.120	-0.116 0.124	-0.121 0.119	-0.126 0.114	-0.128 0.112
Coil 5 Q	-0.018	0.003	-0.002	0.006	0.006	0.006	-0.002	-0.000
	-0.617 0.583	-0.251 0.249	-0.118 0.122	-0.115 0.125	-0.104 0.136	-0.111 0.129	-0.121 0.119	-0.116 0.124
Coil 6 R	0.019	-0.004	0.000	-0.006	-0.014	-0.022	-0.005	-0.011
	-0.308 0.292	-0.284 0.316	-0.316 0.284	-0.298 0.302	-0.326 0.274	-0.313 0.287	-0.292 0.308	-0.289 0.311
Coil 6 Q	-0.025	0.009	0.008	0.001	-0.024	-0.037	0.008	0.004
	-1.531 1.469	-0.586 0.614	-0.297 0.303	-0.302 0.298	-0.314 0.286	-0.306 0.294	-0.306 0.294	-0.302 0.298

ELEC. GAINS 10 KHz 30 KHz 50 KHz 70 KHz 90 KHz 110 KHz 130 KHz 150 KHz

Coil 0 M	125.92	124.35	121.38	116.86	111.43	104.71	97.23	88.66
	123.62 128.66	122.07 127.05	119.14 124.00	114.67 119.35	109.26 113.72	102.58 106.77	95.21 99.10	86.79 90.33
Coil 0 P	7.996	25.057	41.826	58.482	74.993	91.470	107.664	123.858
	5.006 11.006	22.053 28.053	38.817 44.817	55.468 61.468	71.956 77.956	88.385 94.385	104.569 110.569	120.715 126.715
Coil 1 M	218.79	216.20	211.29	203.89	194.71	183.42	170.60	155.91
	214.74 223.50	212.18 220.84	207.32 215.79	200.00 208.16	190.92 198.71	179.61 186.94	167.07 173.89	152.45 158.68
Coil 1 P	7.952	24.986	41.740	58.418	74.964	91.477	107.822	124.135
	4.964 10.964	21.986 27.986	38.739 44.739	55.404 61.404	71.924 77.924	88.463 94.463	104.686 110.686	121.023 127.023
Coil 2 M	434.07	429.22	419.92	406.53	389.91	369.99	347.47	322.24
	424.87 442.21	420.10 437.25	411.07 427.84	397.59 413.82	381.20 396.76	361.22 375.96	339.29 353.13	314.23 327.06
Coil 2 P	7.705	24.192	40.393	56.459	72.366	88.236	103.915	119.673
	4.712 10.712	21.180 27.180	37.386 43.386	53.433 59.433	69.318 75.318	85.156 91.156	100.777 106.777	116.515 122.515
Coil 3 M	708.49	699.77	683.34	658.59	628.17	590.73	548.66	500.50
	693.28 721.58	684.78 712.73	668.80 696.10	644.33 670.63	614.43 639.50	577.45 601.02	536.23 558.12	488.88 508.84
Coil 3 P	8.211	25.763	43.020	60.183	77.190	94.209	110.978	127.771
	5.204 11.204	22.716 28.716	39.940 45.940	57.081 63.081	74.064 80.064	91.034 97.034	107.718 113.718	124.493 130.493
Coil 4 M	1142.2	1128.1	1101.3	1061.1	1011.4	951.3	883.5	806.9
	1118.5 1164.1	1104.8 1149.9	1078.7 1122.7	1039.1 1081.5	990.1 1030.6	930.4 968.3	864.1 899.4	788.3 820.5
Coil 4 P	8.285	26.073	43.530	60.879	78.074	95.250	112.193	129.144
	5.281 11.281	23.033 29.033	40.462 46.462	57.794 63.794	74.962 80.962	92.104 98.104	108.974 114.974	125.899 131.899
Coil 5 M	2301.2	2273.3	2219.7	2139.4	2040.4	1918.8	1782.0	1626.0
	2246.2 2337.9	2218.8 2309.3	2166.3 2254.7	2086.8 2172.0	1990.0 2071.2	1869.2 1945.5	1735.9 1806.7	1582.1 1646.6
Coil 5 P	8.446	26.520	44.299	61.984	79.526	97.050	114.361	131.687
	5.447 11.447	23.493 29.493	41.246 47.246	58.913 64.913	76.424 82.424	93.906 99.906	111.138 117.138	128.430 134.430
Coil 6 M	5920.4	5842.0	5695.0	5478.8	5218.3	4903.6	4562.4	4173.7
	5803.7 6040.6	5727.0 5960.7	5582.1 5809.9	5369.0 5588.1	5109.1 5317.6	4798.3 4994.2	4458.9 4640.9	4074.5 4240.8
Coil 6 P	8.323	26.397	44.062	61.572	78.886	96.115	113.082	130.071
	5.322 11.322	23.373 29.373	41.016 47.016	58.511 64.511	75.773 81.773	92.978 98.978	109.836 115.836	126.821 132.821

INSTRUMENT CONFIGURATION

Source File: /dat1a/LARAMIE_NICHOLS_0994-24-11E/p777q~tdg

73.88'

CABLEHEAD
Diameter : 3.38"
Length : 5.50'
Weight : 24 lbs
Series : CABL338
Mnemonic : CBLH
Measure Point: 2.75': CABLEHEAD TOP

CABLEHEAD TOP — 71.13'

TTRM SUB
Diameter : 3.63"
Length : 3.83'
Weight : 62 lbs
Series : 3981XA
Mnemonic : TTRM
Measure Point: 1.38': TEMP MP
Measure Point: 1.13': RM MP

TEMP MP — 65.93'
RM MP — 65.68'

WTS COMMON REMOTE
Diameter : 3.63"
Length : 6.36'
Weight : 126 lbs
Series : 3514XB
Mnemonic : WTS

DIGITAL SPECTRALOG
Diameter : 3.63"
Length : 7.31'
Weight : 130 lbs
Series : 1329XA
Mnemonic : DSL
Measure Point: 1.60': GR MP

GR MP — 52.48'

COMPENSATED NEUTRON
Diameter : 3.63"
Length : 7.59'
Weight : 150 lbs
Series : 2446XA
Mnemonic : CN
Measure Point: 2.63': LSN MP
Measure Point: 2.24': SSN MP

LSN MP — 45.92'
SSN MP — 45.52'

Z-DENSILOG
Diameter : 4.88"
Length : 11.22'
Weight : 360 lbs
Series : 2234XA
Mnemonic : ZDL
Measure Point: 3.19': CAL MP
Measure Point: 2.47': LSD MP
Measure Point: 2.07': SSD MP

CAL MP — 35.26'
LSD MP — 34.54'
SSD MP — 34.14'

KNUCKLE JOINT (DOUBLE)
Diameter : 3.38"
Length : 4.65'
Weight : 90 lbs
Series : 3939XA
Mnemonic : KNJT

HIGH DEFINITION INDUCTION TOOL
Diameter : 3.62"
Length : 27.13'
Weight : 415 lbs
Series : 1515XA
Mnemonic : HDIL
Measure Point: 13.91': SP MP
Measure Point: 7.44': XMTR MP

BULL PLUG 3 3/8

TOTAL LENGTH: 73.88'
TOTAL WEIGHT: 1374 lbs
MAX DIAMETER: 0'4.88"

SP MP 14.19'

XMTR MP 7.72'

0.00'



COMPANY
WELL
FIELD
COUNTY

LARAMIE ENERGY II LLC
NICHOLS 0994-24-11E
VEGA
MESA

STATE COLORADO

FILE NO:

133758

API NO:

05077103970000



LOCATION:

SHL 2265' FNL 2795' FWL
BHL 2523' FNL 1444' FEL

SEC 24 TWP 9S RGE 94W

ELEVATIONS:

KB 7236 FT
DF
GL 7212 FT

H&P 290

DATE 09-Mar-2018