


COLORADO OIL AND GAS CONSERVATION COMMISSION
SUNDRY NOTICES AND REPORTS OF WELLS



OIL & GAS
CONSERVATION COMMISSION

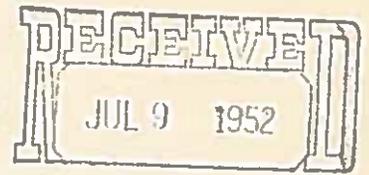

(Indicate nature of data by checking below)

252-9

- Notice of intention to drill _____
- Notice of intention to change plans _____
- Notice of date for test of water shut-off _____
- Report on result of test of water shut-off _____
- Notice of intention to re-drill or repair well _____
- Notice of intention to clean out well _____
- Statement of shooting _____
- Statement of perforating _____
- Notice to pull or otherwise alter casing _____
- Notice of intention to abandon well _____
- Report of work done on well since previous report X _____

Following is a (~~notice of intention to do work~~) July 8 1952
(report of work done) (On land)
(patented) described as follows:

Colorado 6-24 Logan South Springdale
State County Field

4 B. E. Rice NE/4 Section 28 8N 53W ---
(Well No.) (Lease) (Sec. and $\frac{1}{4}$ Sec.) (Twp.) (Range) (Meridian)

The well is located 330 ft. (N) of South line and 990 ft. (E) of ---
(S) (W)

West line.

The elevation above sea level is 4129 D.F. ft.

Details of Plan of Work: (State names of and expected depths to objective sands; Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

- 6-24-52 Spudded. Ran and cemented 8 5/8" casing at 487' with 275 sacks.
- 7-1-52 Drilled to 4862 feet. D.S.T. No.1 4849-62 feet. Tool plugged.
- 7-2-52 D.S.T. No.2 4850-62 feet. Open 1 hour. Instant fair blow decreasing to weak in 45 minutes. Recovered 1245 feet water. No shows. IFP zero, FFP 625. 30 minute shut-in 1275 feet.
- 7-3-52 T.D. 4898 feet. Ran Schlumberger. Preparing to plug and abandon.
- 7-7-52 Plugged and abandoned well by spotting a cement plug from 4898 to 4720 feet opposite the Dakota and 'Muddy' sandstones to a point 15 feet above the top of the 'Muddy' sandstone. Then heavy mud taken from the bottom of the mud pit was placed from 4720 feet to the bottom of the surface casing at 487 feet where a 15 foot cement plug was spotted to 472 feet. Then heavy mud was placed to within 15 feet of the surface where a cement plug was placed to the surface in such a manner as not to interfere with surface cultivation. Schlumberger Formation Tops: Muddy Sandstone 4735 feet, Dakota Sandstone 4849 feet.

Approved: JUL 9 1952
[Signature]
Director

Company Shell Oil Company
Address 413 Denham Bldg., Denver 2, Colo.
By [Signature]
Title Division Production Manager

Submit reports of proposed work, for approval, on this form in Duplicate for patented lands and in Triplicate for school and state lands.