


# Proposed Well Bore Diagram

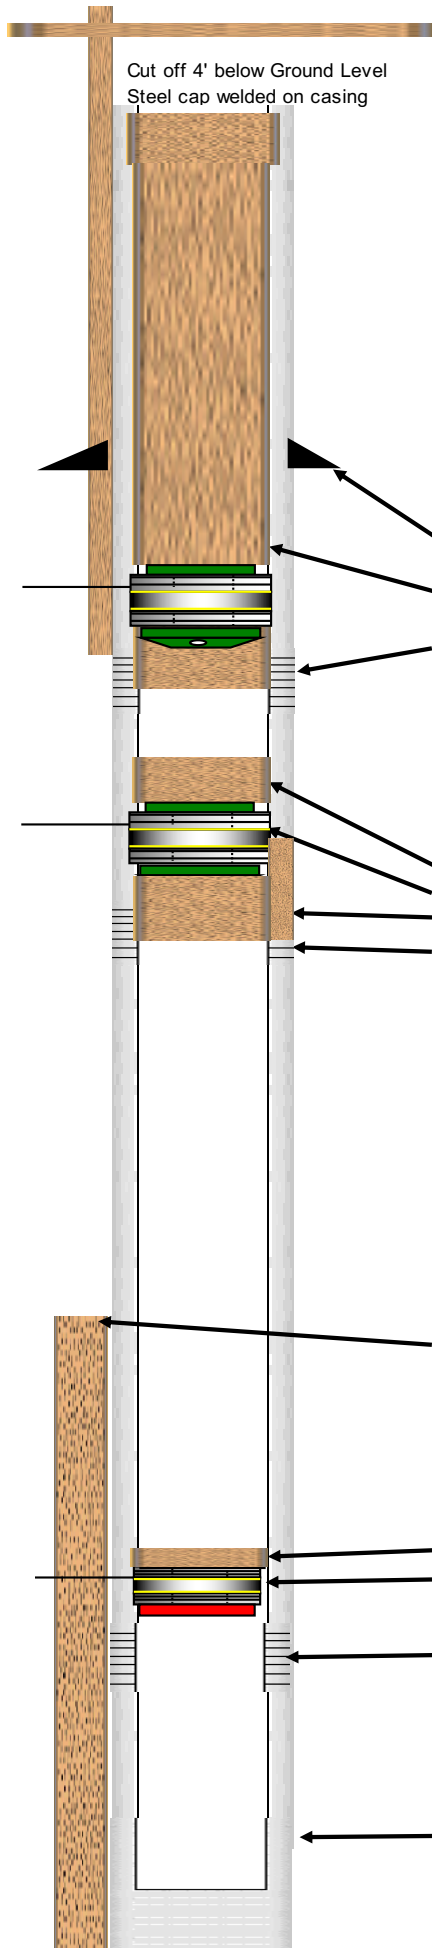

COMPANY					DATE	
Schneider Energy Services, Inc.					12/27/18	
Stromsoe #1						
API 05-087-06392, NENE, Sec 31, 5N, 59W						
Surface Casing		Weight	Grade	Thread	Depth	
	8-5/8"	24#	J-55	LT&C	132'	
Prod Casing		Weight	Grade	Thread	Depth	
	4-1/2"	11.6#	J-55	LT&C	6150'	
drill pipe	First String	Size	Weight	Grade	Thread	Depth
	Second String	Size	Weight	Grade	Thread	Depth
Prepared for:			Perforations:			
			D-Sand 6139'-6143'			
ITEM No#	Length	Description		ID	OD	Depth
1		8-5/8" Surface Casing @ 132'				132.00
		Cemented with 100 Sacks (Calc)				
2						200.00
		90 sacks of cement 200' to 0'				
3		Squeeze Holes @ 200'				200.00
4		100' of cement on top of CIRC				2800.00
5		CIRC @ 2900'				2900.00
6		50 Sacks of Class G Neat Cement				
7		Squeeze Holes @ 3000'				3000.00