




(SUBMIT IN TRIPLICATE)



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

BEST IMAGE
AVAILABLE

Land Office _____
Lease No. primary 033622 (a)
Unit LES DOME

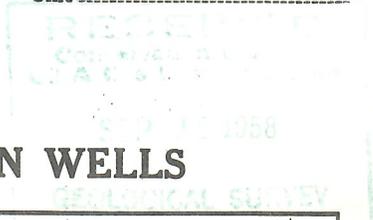

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<input checked="" type="checkbox"/>		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Well No. 35M is located 400 ft. from N line and 700 ft. from E line of sec. 22
SE-NE
55 1/2 Sec. 22 (1/4 Sec. and Sec. No.) 4N 92W 6th (Twp.) (Range) (Meridian)
UNIT (Field) Hoffman (County or Subdivision) Colorado (State or Territory)


The elevation of the derrick floor above sea level is 6397 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

The plan for abandonment is as follows:

1. Cement to 3132' w/12 slt cement.
2. Shoot and pull 7" casing.
3. Shoot and pull 8-3/8" casing.
4. Place two slug cement in outer casing shoe.
5. Place 10' ex plug in surface pipe with 4" marker.

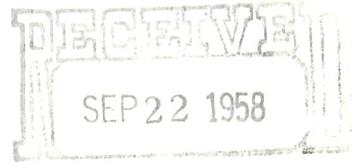

TD 3483'

9-18-58
G. G. Drayton

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Pan American Petroleum Corporation

Address P. O. Box 458, Brush, Colorado

By R. B. Blum
Title Production Foreman