

# PETRO OPERATING COMPANY LLC

Well Name: **BEF West 22**

Surface Location: BEF 1S66W2 Pad Sec.2-T1S-R66W

North American Datum 1983 , US State Plane 1983, Colorado Northern Zone

Ground Elevation: 5049.0

+N/-S+E/-W Northing Easting Latitude Longitude Slot

0.0 0.0 1241928.843214414.79 39.994940 -104.734700



RKB - 27' WELL @ 5076.0ft (RKB - 27')

## FINAL SURVEY

**Projected Bottom Hole Location**

**12,297'MD 7358'TVD 1510'N & 4505'W of SHL**

**89.3 degree Incl @ 269.80 degree AZM**

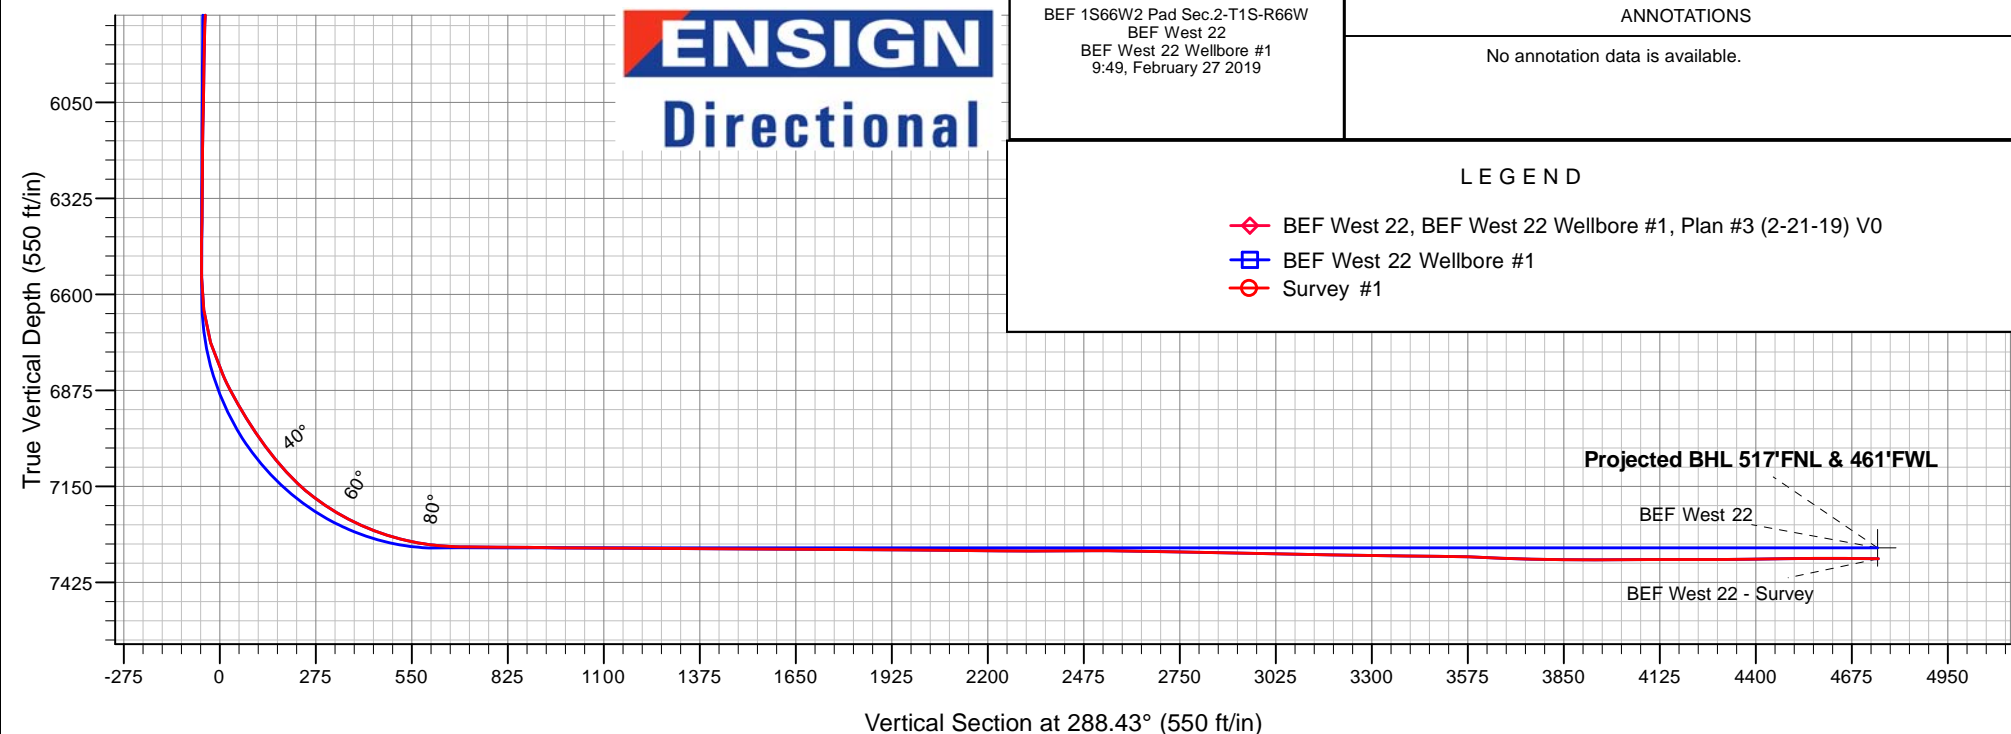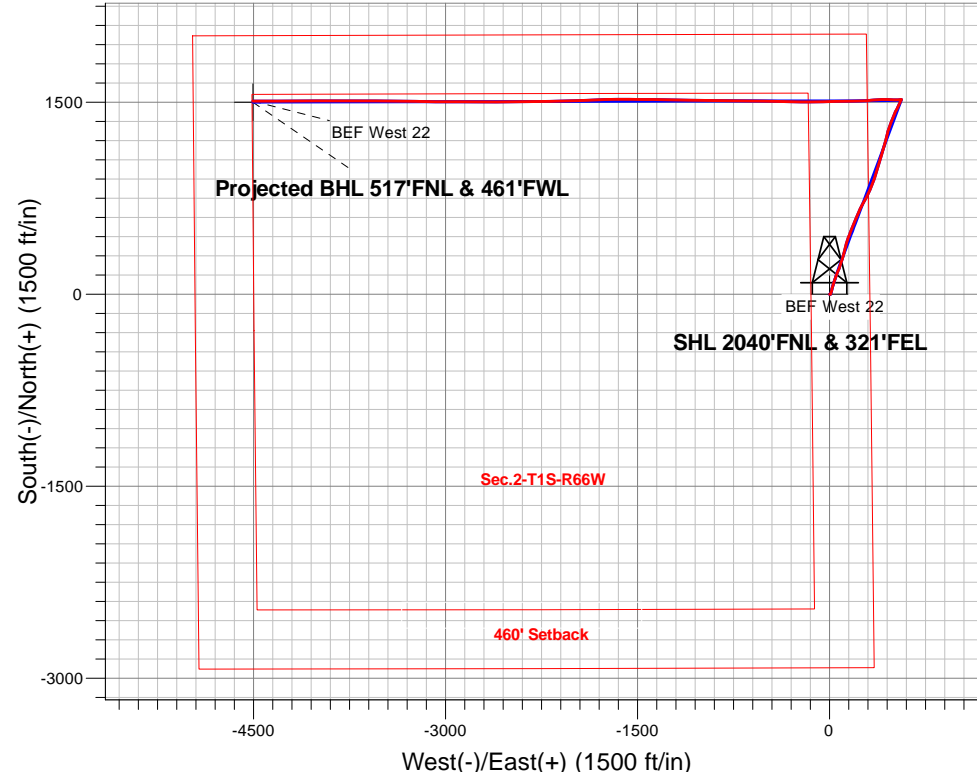

BEF 1S66W2 Pad Sec.2-T1S-R66W  
BEF West 22  
BEF West 22 Wellbore #1  
9:49, February 27 2019

### ANNOTATIONS

No annotation data is available.



# **PETRO OPERATING COMPANY LLC**

**SEC.2-T1S-R66W**

**BEF 1S66W2 Pad Sec.2-T1S-R66W**

**BEF West 22**

**BEF West 22 Wellbore #1**

**Survey: Survey #1**

## **Standard Survey Report**

**27 February, 2019**

<b>Company:</b>	PETRO OPERATING COMPANY LLC	<b>Local Co-ordinate Reference:</b>	Well BEF West 22
<b>Project:</b>	SEC.2-T1S-R66W	<b>TVD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Site:</b>	BEF 1S66W2 Pad Sec.2-T1S-R66W	<b>MD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Well:</b>	BEF West 22	<b>North Reference:</b>	True
<b>Wellbore:</b>	BEF West 22 Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	BEF West 22 Wellbore #1	<b>Database:</b>	US_EDM

<b>Project</b>	SEC.2-T1S-R66W, Adams County, CO		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		Using Well Reference Point
<b>Map Zone:</b>	Colorado Northern Zone		Using geodetic scale factor

Site	BEF 1S66W2 Pad Sec.2-T1S-R66W				
Site Position:		Northing:	1,241,928.85 usft	Latitude:	39.994940
From:	Lat/Long	Easting:	3,214,414.79 usft	Longitude:	-104.734700
Position Uncertainty:	0.0 ft	Slot Radius:	13-3/16 "	Grid Convergence:	0.49 °

Well	BEF West 22					
Well Position	+N/-S	0.0 ft	Northing:	1,241,928.84 usft	Latitude:	39.994940
	+E/-W	0.0 ft	Easting:	3,214,414.79 usft	Longitude:	-104.734700
Position Uncertainty		0.0 ft	Wellhead Elevation:	0.0 ft	Ground Level:	5,049.0 ft

<b>Wellbore</b>	BEF West 22 Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	HDGM	2/21/2019	8.07	66.28	51,918

<b>Design</b>	BEF West 22 Wellbore #1				
<b>Audit Notes:</b>					
<b>Version:</b>	1.0	<b>Phase:</b>	ACTUAL	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>	
	0.0	0.0	0.0	288.43	

<b>Survey Program</b>	<b>Date</b>	2/27/2019			
<b>From (ft)</b>	<b>To (ft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Description</b>	
152.0	12,297.0	Survey #1 (BEF West 22 Wellbore #1)	MWD	MWD - Standard	

<b>Survey</b>										
<b>Measured Depth (ft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Vertical Section (ft)</b>	<b>Dogleg Rate (°/100usft)</b>	<b>Build Rate (°/100usft)</b>	<b>Turn Rate (°/100usft)</b>	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
1.0	0.00	90.30	1.0	0.0	0.0	0.0	0.20	0.20	0.00	
<b>SHL 2040'FNL &amp; 321'FEL</b>										
152.0	0.30	90.30	152.0	0.0	0.4	-0.4	0.20	0.20	0.00	
247.0	0.50	94.60	247.0	0.0	1.1	-1.0	0.21	0.21	4.53	
341.0	0.80	100.00	341.0	-0.2	2.1	-2.1	0.33	0.32	5.74	
436.0	0.90	93.90	436.0	-0.3	3.5	-3.4	0.14	0.11	-6.42	
531.0	0.90	102.30	531.0	-0.6	5.0	-4.9	0.14	0.00	8.84	
626.0	1.30	35.70	626.0	0.2	6.3	-6.0	1.32	0.42	-70.11	
721.0	2.00	23.20	720.9	2.6	7.6	-6.4	0.82	0.74	-13.16	
816.0	3.50	27.10	815.8	6.7	9.6	-7.0	1.59	1.58	4.11	

<b>Company:</b>	PETRO OPERATING COMPANY LLC	<b>Local Co-ordinate Reference:</b>	Well BEF West 22
<b>Project:</b>	SEC.2-T1S-R66W	<b>TVD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Site:</b>	BEF 1S66W2 Pad Sec.2-T1S-R66W	<b>MD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Well:</b>	BEF West 22	<b>North Reference:</b>	True
<b>Wellbore:</b>	BEF West 22 Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	BEF West 22 Wellbore #1	<b>Database:</b>	US_EDM

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
910.0	5.10	14.50	909.5	13.3	12.0	-7.1	1.97	1.70	-13.40
1,005.0	6.80	14.80	1,004.0	22.8	14.4	-6.5	1.79	1.79	0.32
1,100.0	8.60	13.00	1,098.2	35.1	17.5	-5.5	1.91	1.89	-1.89
1,194.0	9.20	14.20	1,191.0	49.3	20.9	-4.3	0.67	0.64	1.28
1,289.0	11.30	16.70	1,284.5	65.6	25.4	-3.4	2.26	2.21	2.63
1,383.0	12.20	15.50	1,376.5	84.0	30.7	-2.6	0.99	0.96	-1.28
1,490.0	12.80	20.00	1,481.0	106.0	37.8	-2.4	1.07	0.56	4.21
1,570.0	12.40	17.00	1,559.1	122.5	43.4	-2.4	0.96	-0.50	-3.75
1,665.0	13.40	21.60	1,651.7	142.5	50.4	-2.8	1.51	1.05	4.84
1,760.0	15.00	22.30	1,743.8	164.1	59.1	-4.2	1.69	1.68	0.74
1,855.0	16.40	21.60	1,835.2	188.0	68.7	-5.8	1.49	1.47	-0.74
1,950.0	18.20	17.70	1,925.9	214.6	78.2	-6.3	2.25	1.89	-4.11
2,045.0	19.90	19.00	2,015.7	244.0	87.9	-6.3	1.84	1.79	1.37
2,139.0	19.80	17.20	2,104.1	274.3	97.9	-6.1	0.66	-0.11	-1.91
2,234.0	19.80	14.90	2,193.5	305.3	106.8	-4.8	0.82	0.00	-2.42
2,329.0	19.50	13.90	2,283.0	336.2	114.7	-2.5	0.47	-0.32	-1.05
2,424.0	19.60	17.70	2,372.5	366.8	123.4	-1.1	1.34	0.11	4.00
2,518.0	19.10	16.20	2,461.2	396.6	132.4	-0.3	0.75	-0.53	-1.60
2,613.0	18.80	14.70	2,551.1	426.3	140.7	1.3	0.60	-0.32	-1.58
2,708.0	18.80	23.40	2,641.0	455.2	150.6	1.0	2.95	0.00	9.16
2,803.0	17.90	20.90	2,731.2	482.8	161.9	-1.0	1.26	-0.95	-2.63
2,898.0	17.10	20.20	2,821.8	509.6	171.9	-2.0	0.87	-0.84	-0.74
2,993.0	20.10	23.40	2,911.8	537.7	183.3	-3.9	3.33	3.16	3.37
3,087.0	19.50	23.40	3,000.3	566.9	195.9	-6.6	0.64	-0.64	0.00
3,182.0	18.30	22.70	3,090.1	595.2	208.0	-9.1	1.29	-1.26	-0.74
3,277.0	17.10	21.40	3,180.6	622.0	218.8	-10.9	1.33	-1.26	-1.37
3,372.0	18.60	25.50	3,271.1	648.7	230.4	-13.5	2.06	1.58	4.32
3,467.0	17.30	24.80	3,361.4	675.2	242.9	-17.0	1.39	-1.37	-0.74
3,562.0	19.20	29.30	3,451.7	701.6	256.4	-21.5	2.49	2.00	4.74
3,656.0	18.30	28.30	3,540.7	728.1	271.0	-26.9	1.02	-0.96	-1.06
3,751.0	21.30	27.10	3,630.0	756.6	285.9	-32.1	3.19	3.16	-1.26
3,846.0	20.70	25.60	3,718.7	787.1	301.1	-36.8	0.85	-0.63	-1.58
3,940.0	19.20	24.90	3,807.1	816.1	314.7	-40.6	1.62	-1.60	-0.74
4,035.0	18.00	24.90	3,897.1	843.6	327.5	-44.0	1.26	-1.26	0.00
4,130.0	20.10	19.30	3,986.9	872.3	339.1	-45.9	2.93	2.21	-5.89
4,224.0	19.00	17.70	4,075.5	902.1	349.1	-46.0	1.30	-1.17	-1.70
4,319.0	17.80	17.00	4,165.6	930.7	358.0	-45.4	1.28	-1.26	-0.74
4,414.0	19.90	16.30	4,255.5	960.2	366.8	-44.4	2.22	2.21	-0.74
4,509.0	18.90	17.20	4,345.2	990.4	375.9	-43.5	1.10	-1.05	0.95
4,604.0	17.90	16.20	4,435.3	1,019.1	384.5	-42.6	1.10	-1.05	-1.05
4,699.0	20.40	18.30	4,525.0	1,048.8	393.8	-42.0	2.73	2.63	2.21
4,794.0	19.70	18.10	4,614.3	1,079.8	404.0	-41.9	0.74	-0.74	-0.21
4,888.0	18.60	15.30	4,703.1	1,109.3	412.8	-41.0	1.52	-1.17	-2.98

<b>Company:</b>	PETRO OPERATING COMPANY LLC	<b>Local Co-ordinate Reference:</b>	Well BEF West 22
<b>Project:</b>	SEC.2-T1S-R66W	<b>TVD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Site:</b>	BEF 1S66W2 Pad Sec.2-T1S-R66W	<b>MD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Well:</b>	BEF West 22	<b>North Reference:</b>	True
<b>Wellbore:</b>	BEF West 22 Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	BEF West 22 Wellbore #1	<b>Database:</b>	US_EDM

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,983.0	20.10	16.00	4,792.7	1,139.6	421.3	-39.4	1.60	1.58	0.74
5,078.0	20.00	15.60	4,881.9	1,170.9	430.2	-37.9	0.18	-0.11	-0.42
5,173.0	19.50	14.60	4,971.4	1,201.9	438.6	-36.1	0.64	-0.53	-1.05
5,268.0	19.10	13.50	5,061.0	1,232.4	446.2	-33.7	0.57	-0.42	-1.16
5,363.0	18.20	13.20	5,151.0	1,261.9	453.2	-31.0	0.95	-0.95	-0.32
5,457.0	19.60	19.10	5,240.0	1,291.1	461.7	-29.8	2.52	1.49	6.28
5,551.0	18.60	19.50	5,328.8	1,320.2	471.9	-30.3	1.07	-1.06	0.43
5,645.0	18.90	22.70	5,417.8	1,348.3	482.8	-31.7	1.14	0.32	3.40
5,740.0	17.50	21.40	5,508.1	1,375.8	493.9	-33.6	1.53	-1.47	-1.37
5,835.0	16.50	20.90	5,598.9	1,401.7	503.9	-34.9	1.06	-1.05	-0.53
5,929.0	15.30	26.90	5,689.3	1,425.3	514.3	-37.3	2.16	-1.28	6.38
6,024.0	13.80	27.60	5,781.3	1,446.5	525.2	-41.0	1.59	-1.58	0.74
6,118.0	12.40	24.90	5,872.8	1,465.6	534.7	-43.9	1.63	-1.49	-2.87
6,212.0	10.70	22.10	5,964.9	1,482.8	542.2	-45.6	1.90	-1.81	-2.98
6,307.0	9.10	27.20	6,058.5	1,497.7	549.0	-47.3	1.92	-1.68	5.37
6,402.0	6.60	24.40	6,152.6	1,509.3	554.7	-49.0	2.66	-2.63	-2.95
6,496.0	4.00	23.40	6,246.2	1,517.3	558.2	-49.9	2.77	-2.77	-1.06
6,590.0	1.30	52.00	6,340.1	1,520.9	560.3	-50.7	3.11	-2.87	30.43
6,708.0	1.10	98.80	6,458.1	1,521.6	562.5	-52.6	0.82	-0.17	39.66
6,802.0	1.30	298.80	6,552.0	1,522.0	562.5	-52.4	2.51	0.21	-170.21
6,896.0	7.70	264.70	6,645.7	1,521.9	555.2	-45.6	7.09	6.81	-36.28
6,991.0	18.10	265.80	6,738.2	1,520.2	534.1	-26.1	10.95	10.95	1.16
7,086.0	24.90	274.00	6,826.5	1,520.5	499.4	6.9	7.81	7.16	8.63
7,181.0	30.60	271.00	6,910.6	1,522.4	455.3	49.4	6.18	6.00	-3.16
7,275.0	35.80	268.10	6,989.2	1,521.9	403.8	98.0	5.78	5.53	-3.09
7,370.0	40.70	265.10	7,063.8	1,518.3	345.1	152.6	5.51	5.16	-3.16
7,464.0	47.00	265.90	7,131.6	1,513.2	280.3	212.5	6.73	6.70	0.85
7,559.0	56.30	268.60	7,190.5	1,509.8	205.9	281.9	10.04	9.79	2.84
7,654.0	62.60	268.90	7,238.7	1,508.0	124.2	358.9	6.64	6.63	0.32
7,749.0	70.30	269.10	7,276.6	1,506.5	37.2	441.0	8.11	8.11	0.21
7,843.0	77.10	268.90	7,303.0	1,504.9	-53.0	526.0	7.24	7.23	-0.21
7,937.0	84.20	269.60	7,318.3	1,503.7	-145.7	613.6	7.59	7.55	0.74
7,948.7	84.85	269.86	7,319.4	1,503.6	-157.3	624.6	6.00	5.58	2.22
LPL 525'FNL & 460'FEL									
8,032.0	89.50	271.70	7,323.5	1,504.8	-240.5	703.9	6.00	5.58	2.21
8,126.0	89.80	271.20	7,324.1	1,507.1	-334.5	793.8	0.62	0.32	-0.53
8,221.0	89.30	270.70	7,324.8	1,508.7	-429.4	884.4	0.74	-0.53	-0.53
8,316.0	89.30	270.30	7,326.0	1,509.5	-524.4	974.8	0.42	0.00	-0.42
8,411.0	89.80	270.70	7,326.7	1,510.4	-619.4	1,065.1	0.67	0.53	0.42
8,506.0	89.50	270.70	7,327.3	1,511.5	-714.4	1,155.6	0.32	-0.32	0.00
8,600.0	89.80	271.00	7,327.9	1,512.9	-808.4	1,245.2	0.45	0.32	0.32
8,695.0	89.60	270.90	7,328.4	1,514.5	-903.4	1,335.9	0.24	-0.21	-0.11
8,789.0	89.80	271.00	7,328.9	1,516.1	-997.4	1,425.5	0.24	0.21	0.11

<b>Company:</b>	PETRO OPERATING COMPANY LLC	<b>Local Co-ordinate Reference:</b>	Well BEF West 22
<b>Project:</b>	SEC.2-T1S-R66W	<b>TVD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Site:</b>	BEF 1S66W2 Pad Sec.2-T1S-R66W	<b>MD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Well:</b>	BEF West 22	<b>North Reference:</b>	True
<b>Wellbore:</b>	BEF West 22 Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	BEF West 22 Wellbore #1	<b>Database:</b>	US_EDM

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,884.0	89.70	270.70	7,329.3	1,517.5	-1,092.4	1,516.1	0.33	-0.11	-0.32
8,979.0	89.60	270.70	7,329.9	1,518.6	-1,187.3	1,606.6	0.11	-0.11	0.00
9,074.0	89.70	270.70	7,330.4	1,519.8	-1,282.3	1,697.0	0.11	0.11	0.00
9,168.0	89.70	270.90	7,330.9	1,521.1	-1,376.3	1,786.6	0.21	0.00	0.21
9,262.0	89.50	270.70	7,331.6	1,522.4	-1,470.3	1,876.2	0.30	-0.21	-0.21
9,357.0	89.70	270.90	7,332.3	1,523.7	-1,565.3	1,966.7	0.30	0.21	0.21
9,451.0	89.50	268.80	7,332.9	1,523.5	-1,659.3	2,055.8	2.24	-0.21	-2.23
9,545.0	89.60	268.60	7,333.6	1,521.4	-1,753.3	2,144.3	0.24	0.11	-0.21
9,640.0	89.30	267.90	7,334.6	1,518.5	-1,848.2	2,233.5	0.80	-0.32	-0.74
9,735.0	89.80	267.70	7,335.3	1,514.8	-1,943.1	2,322.4	0.57	0.53	-0.21
9,829.0	90.80	267.90	7,334.8	1,511.2	-2,037.1	2,410.4	1.08	1.06	0.21
9,924.0	90.20	268.80	7,334.0	1,508.5	-2,132.0	2,499.6	1.14	-0.63	0.95
10,019.0	88.80	269.30	7,334.8	1,506.9	-2,227.0	2,589.2	1.56	-1.47	0.53
10,113.0	89.40	269.10	7,336.3	1,505.6	-2,321.0	2,677.9	0.67	0.64	-0.21
10,208.0	88.40	269.80	7,338.1	1,504.7	-2,416.0	2,767.7	1.28	-1.05	0.74
10,303.0	88.90	270.10	7,340.4	1,504.6	-2,510.9	2,857.8	0.61	0.53	0.32
10,397.0	89.40	269.60	7,341.7	1,504.3	-2,604.9	2,946.9	0.75	0.53	-0.53
10,492.0	88.60	270.20	7,343.4	1,504.2	-2,699.9	3,037.0	1.05	-0.84	0.63
10,587.0	89.20	270.20	7,345.2	1,504.5	-2,794.9	3,127.2	0.63	0.63	0.00
10,682.0	89.50	270.20	7,346.3	1,504.8	-2,889.9	3,217.4	0.32	0.32	0.00
10,776.0	88.80	270.50	7,347.7	1,505.4	-2,983.9	3,306.8	0.81	-0.74	0.32
10,871.0	89.10	270.10	7,349.4	1,505.9	-3,078.9	3,397.0	0.53	0.32	-0.42
10,966.0	89.90	270.70	7,350.3	1,506.6	-3,173.8	3,487.4	1.05	0.84	0.63
11,061.0	87.90	270.90	7,352.1	1,507.9	-3,268.8	3,577.9	2.12	-2.11	0.21
11,156.0	87.90	271.00	7,355.6	1,509.5	-3,363.7	3,668.4	0.11	0.00	0.11
11,250.0	88.60	270.30	7,358.4	1,510.5	-3,457.7	3,757.9	1.05	0.74	-0.74
11,345.0	89.30	270.50	7,360.2	1,511.2	-3,552.7	3,848.2	0.77	0.74	0.21
11,440.0	89.90	269.80	7,360.9	1,511.4	-3,647.7	3,938.4	0.97	0.63	-0.74
11,535.0	91.30	270.00	7,359.9	1,511.3	-3,742.7	4,028.5	1.49	1.47	0.21
11,629.0	89.30	270.50	7,359.4	1,511.7	-3,836.7	4,117.8	2.19	-2.13	0.53
11,724.0	90.20	270.50	7,359.8	1,512.5	-3,931.6	4,208.2	0.95	0.95	0.00
11,819.0	90.20	269.50	7,359.4	1,512.5	-4,026.6	4,298.3	1.05	0.00	-1.05
11,914.0	91.20	269.10	7,358.3	1,511.4	-4,121.6	4,388.0	1.13	1.05	-0.42
12,009.0	90.00	269.80	7,357.3	1,510.5	-4,216.6	4,477.9	1.46	-1.26	0.74
12,104.0	91.20	270.00	7,356.3	1,510.3	-4,311.6	4,567.9	1.28	1.26	0.21
12,198.0	88.90	269.80	7,356.2	1,510.1	-4,405.6	4,657.1	2.46	-2.45	-0.21
12,237.0	89.30	269.80	7,356.8	1,510.0	-4,444.6	4,694.0	1.03	1.03	0.00
12,297.0	89.30	269.80	7,357.6	1,509.8	-4,504.6	4,750.9	0.00	0.00	0.00
Projected BHL 517'FNL & 461'FWL									

<b>Company:</b>	PETRO OPERATING COMPANY LLC	<b>Local Co-ordinate Reference:</b>	Well BEF West 22
<b>Project:</b>	SEC.2-T1S-R66W	<b>TVD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Site:</b>	BEF 1S66W2 Pad Sec.2-T1S-R66W	<b>MD Reference:</b>	WELL @ 5076.0ft (RKB - 27')
<b>Well:</b>	BEF West 22	<b>North Reference:</b>	True
<b>Wellbore:</b>	BEF West 22 Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	BEF West 22 Wellbore #1	<b>Database:</b>	US_EDM

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL 2040'FNL & 321'FE - survey hits target center - Point	0.00	0.00	1.0	0.0	0.0	1,241,928.85	3,214,414.79	39.994940	-104.734700
Projected BHL 517'FNL - survey misses target center by 32.7ft at 12297.0ft MD (7357.6 TVD, 1509.8 N, -4504.6 E) - Point	0.00	0.00	7,326.0	1,501.3	-4,505.1	1,243,391.13	3,209,897.07	39.999060	-104.750780

Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------