





				Tek-1.69 1 11/16" Tekco Adjustable Centralizer	2.21	1.69	10.00
WVFSYNC	15.63						
WVFCAL	15.63						
TEMP	14.63						
WVF3FT	12.55			CBLTEKCO-168 1x2 w Temp (Del) (ITHU1-9.75 Tekco 1 11/16" 400 Deg F Dual Receiver with Temp	1.69	1.69	52.00
WVF5FT	11.55						
WVFTEMP	8.13						
				Tek-1.69 1 11/16" Tekco Adjustable Centralizer	2.21	1.69	10.00
GR	3.10			GR-Tek-Co (IUUA1-04) TEKCO 1 11/16" 400 Deg. F Scintillation Logging Gamma Ray	3.82	1.68	18.00
CCL	0.98			CCL-Titan (Titan169-CCL) Titan 169 CCL	1.83	1.69	5.00
				Titan-1.375_Cap Titan 1 3/8" Cap	0.27	1.38	1.00
			Dataset:	troy6-2-19.db: field/well/run1/pass24			
			Total length:	21.12 ft			
			Total weight:	101.00 lb			
			O.D.:	1.69 in			

Database File troy6-2-19.db  
 Dataset Pathname pass24  
 Presentation Format scbl\_dr  
 Dataset Creation Sun Jun 02 08:10:47 2019  
 Charted by Depth in Foot scaled 1:240

300	TT3FT (usec)	200
-9	Collar Locator	1
0	Gamma Ray	150
0	Line Speed (ft/min)	100

0	Amplitude (mV)	100	200	VDL	1200
---	----------------	-----	-----	-----	------

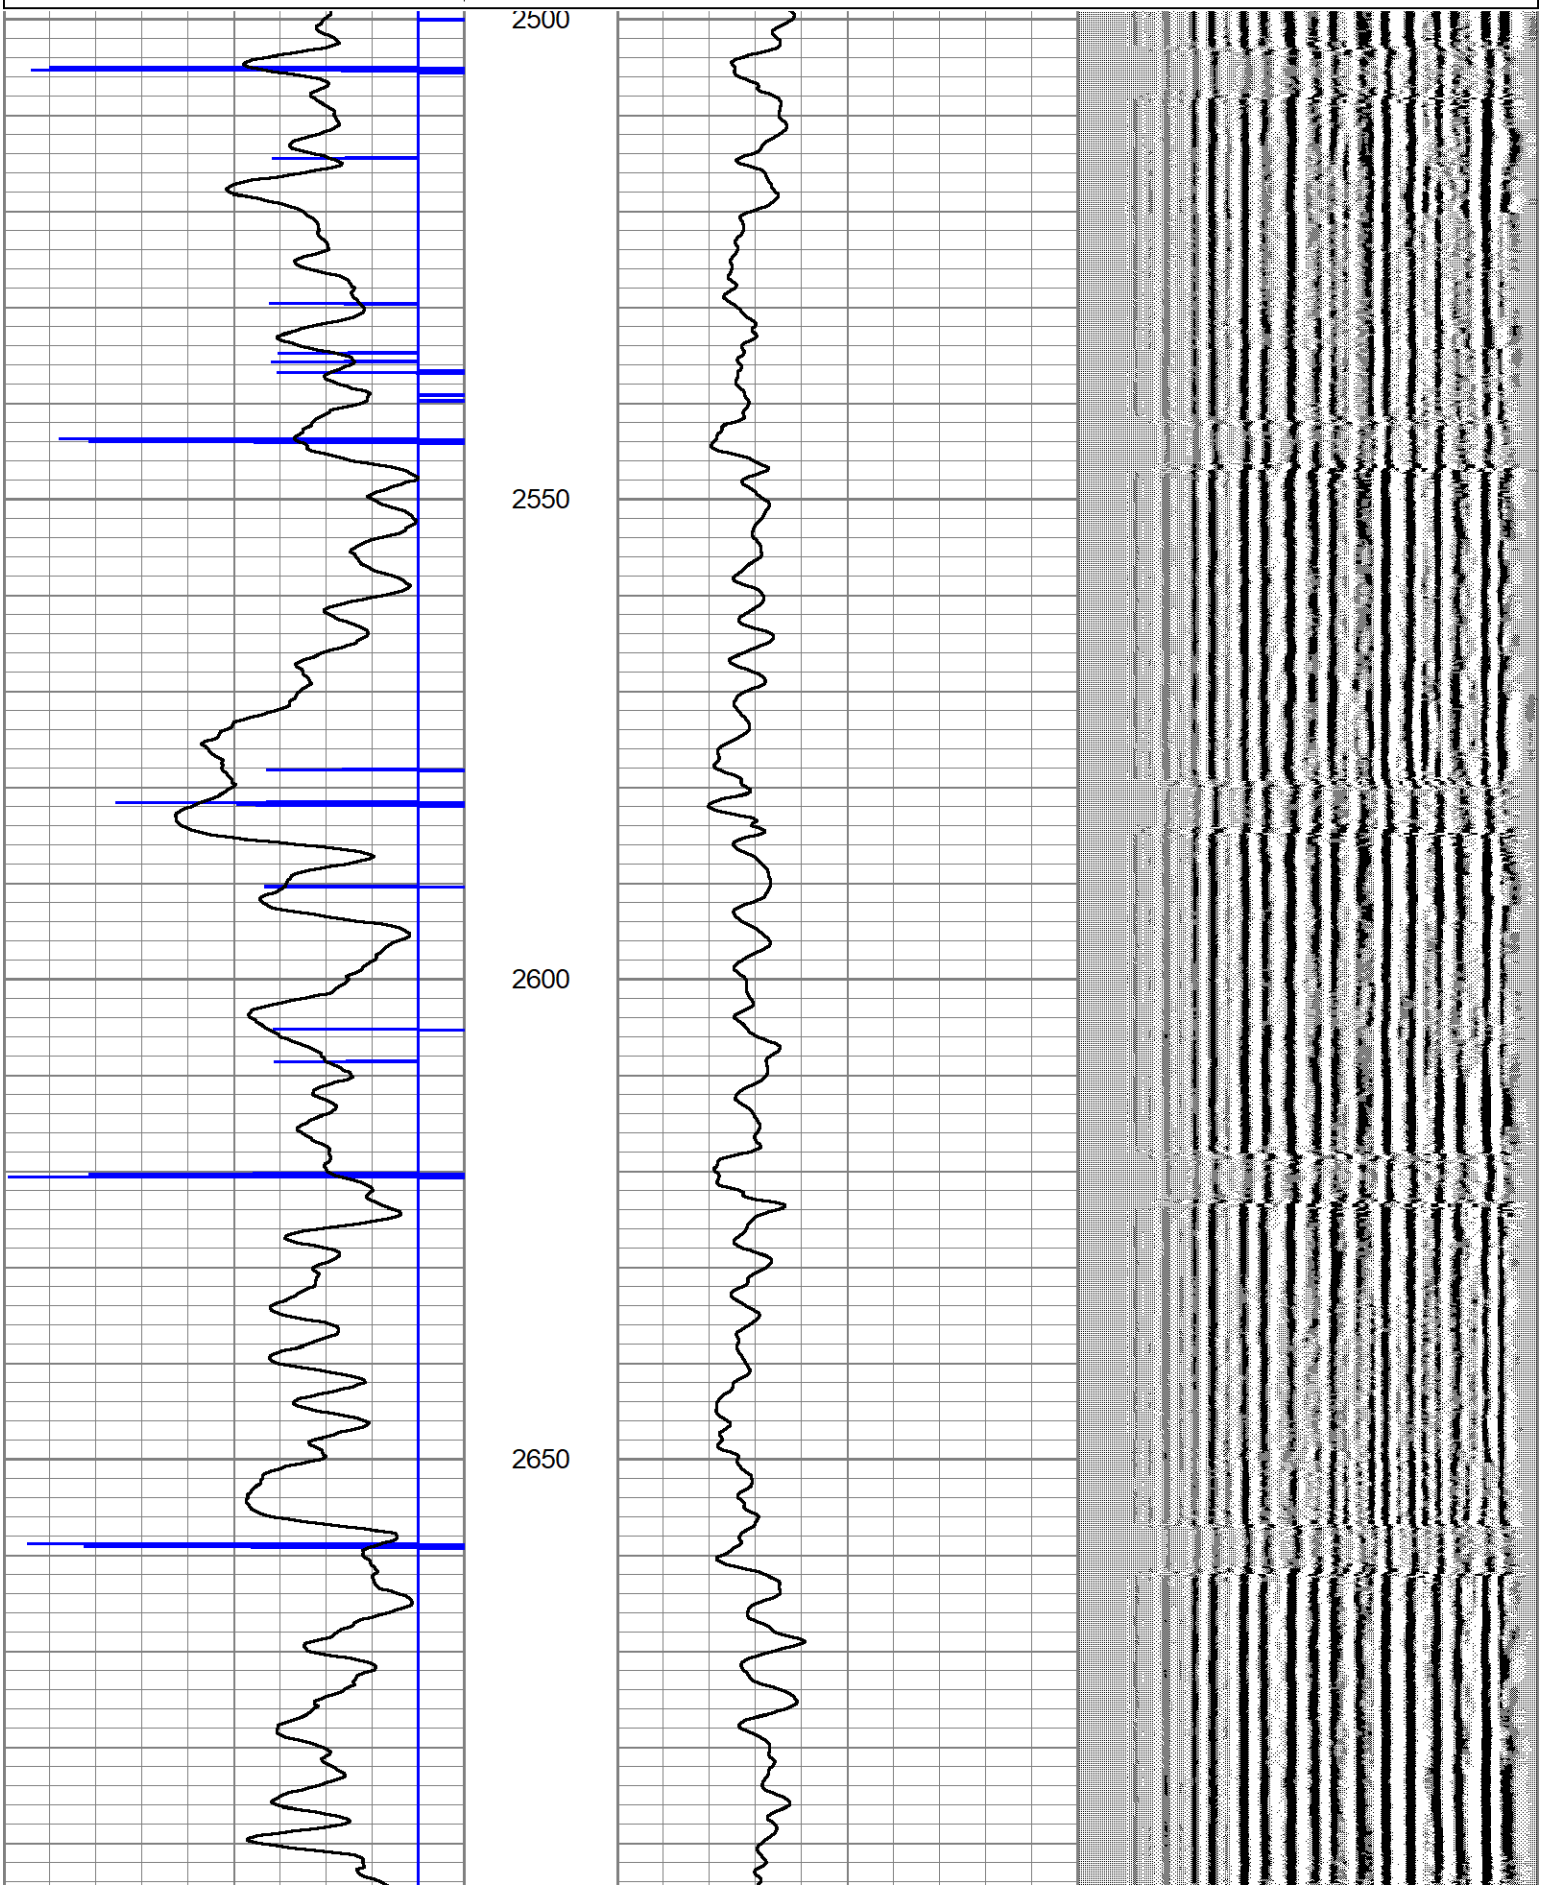

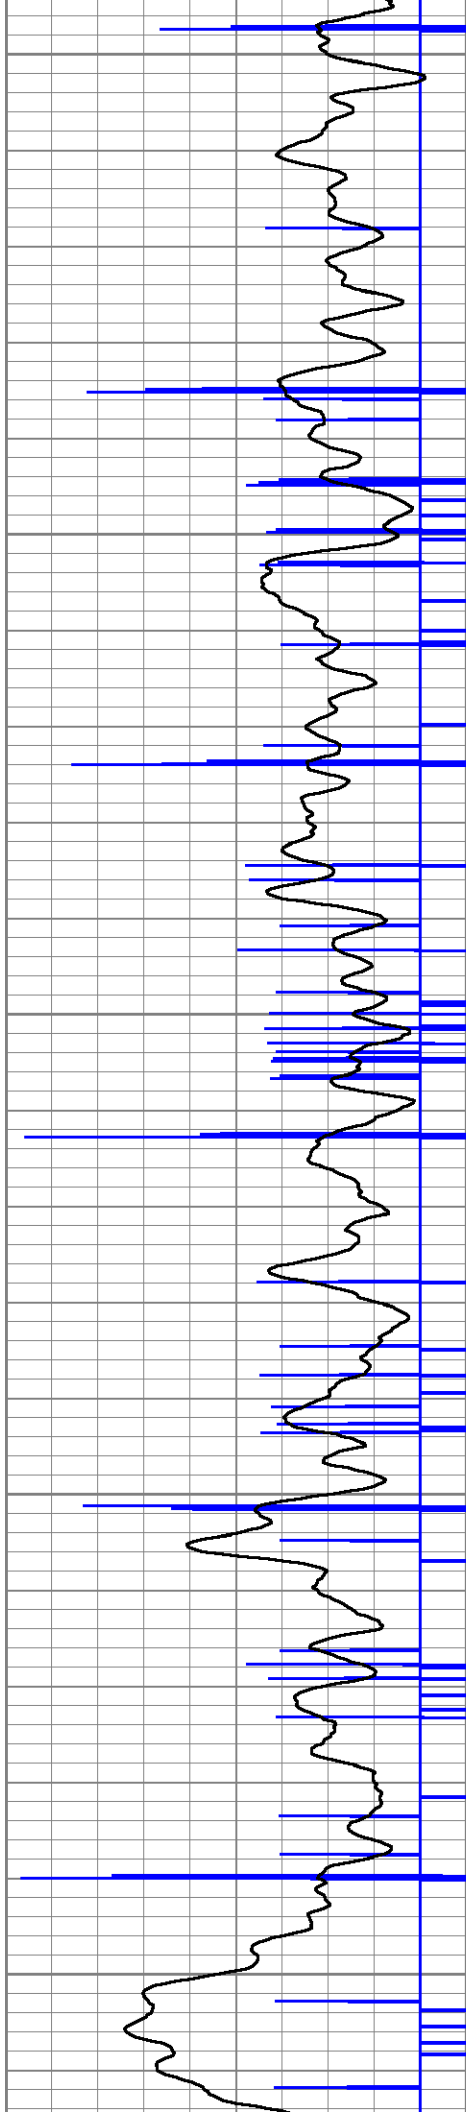



2700


2750

2800

2850

2900

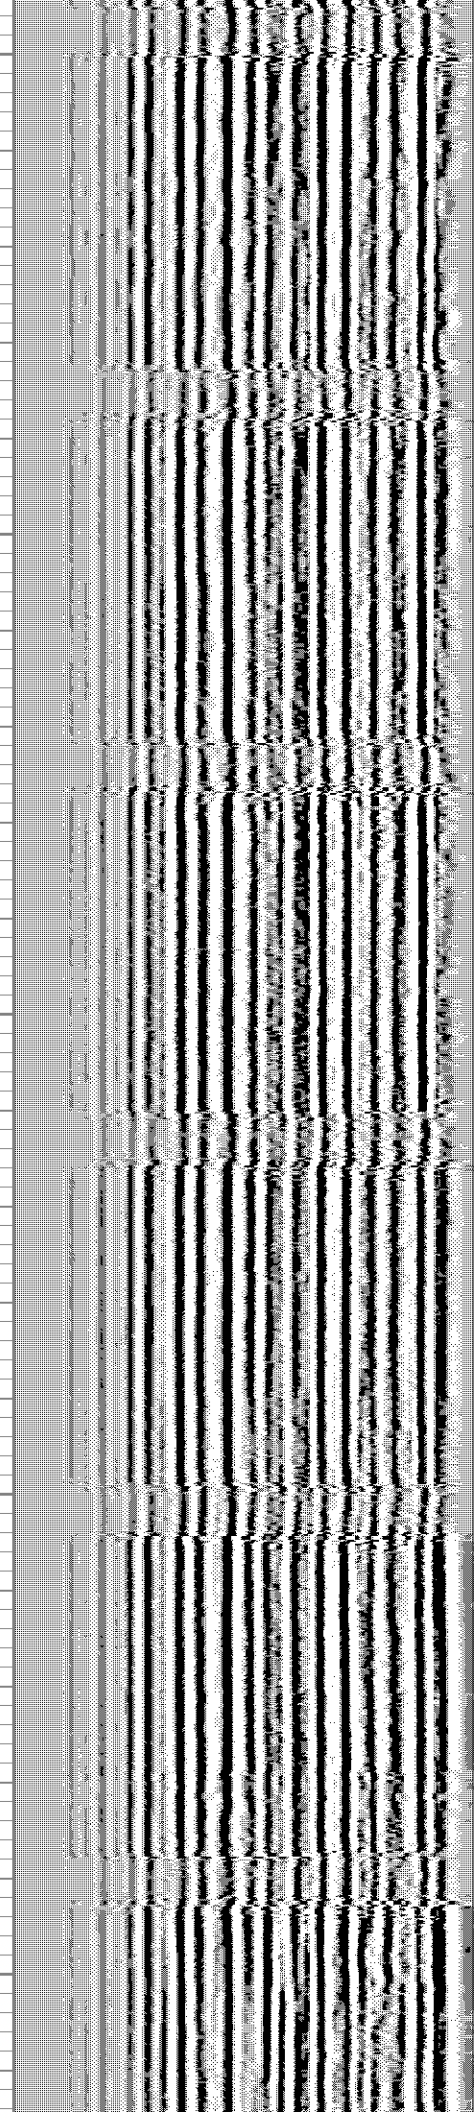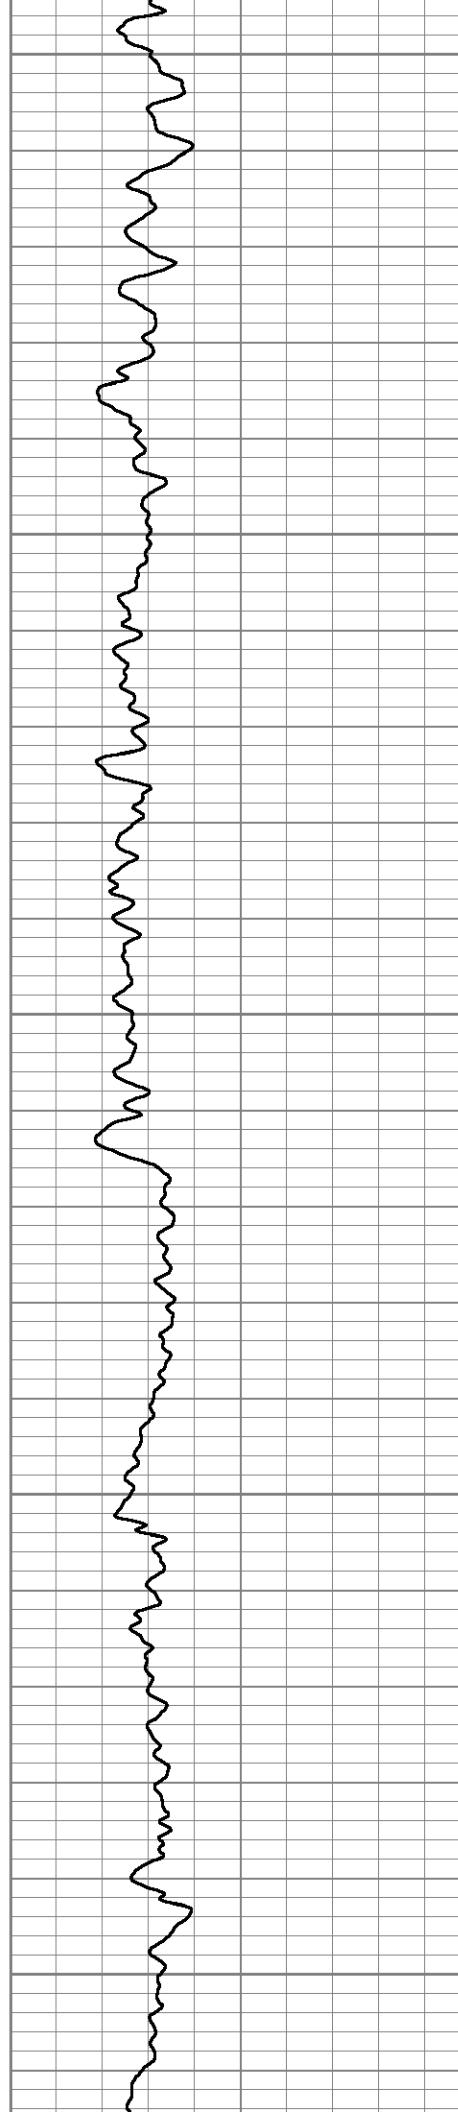


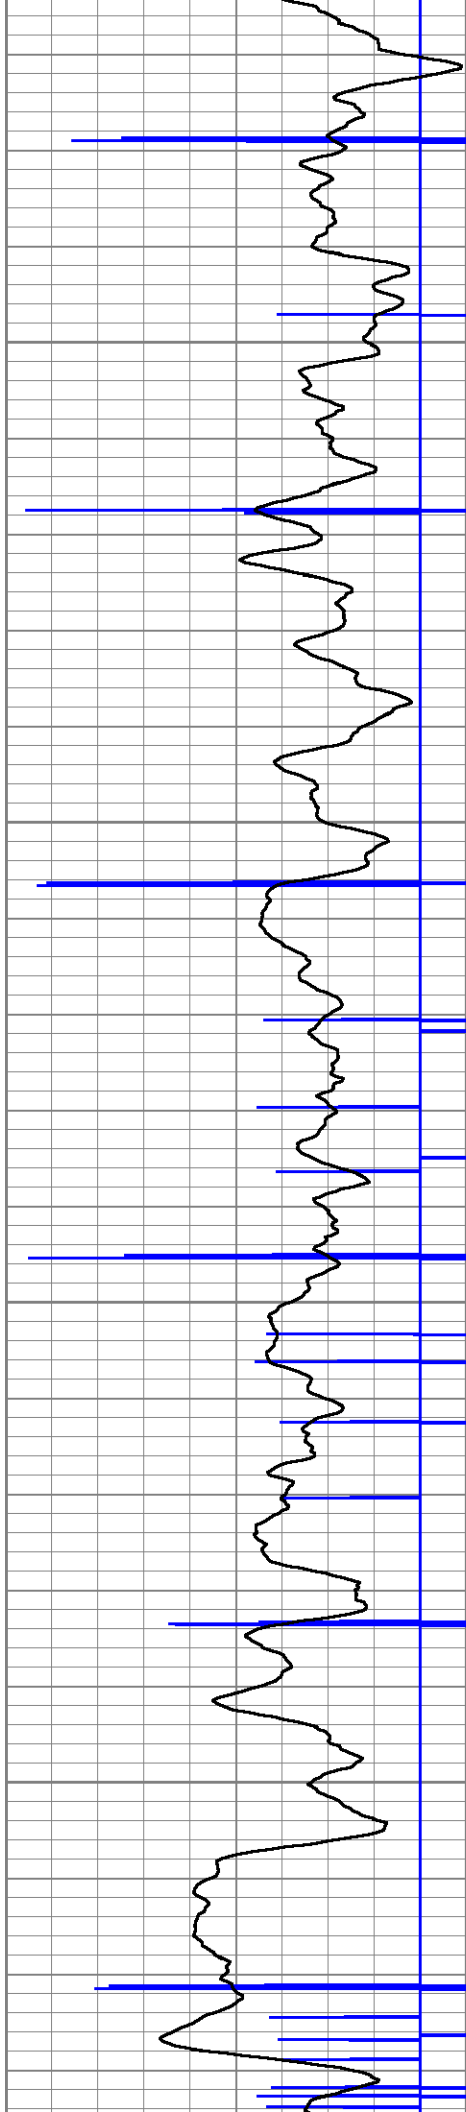



2950

3000

3050

3100

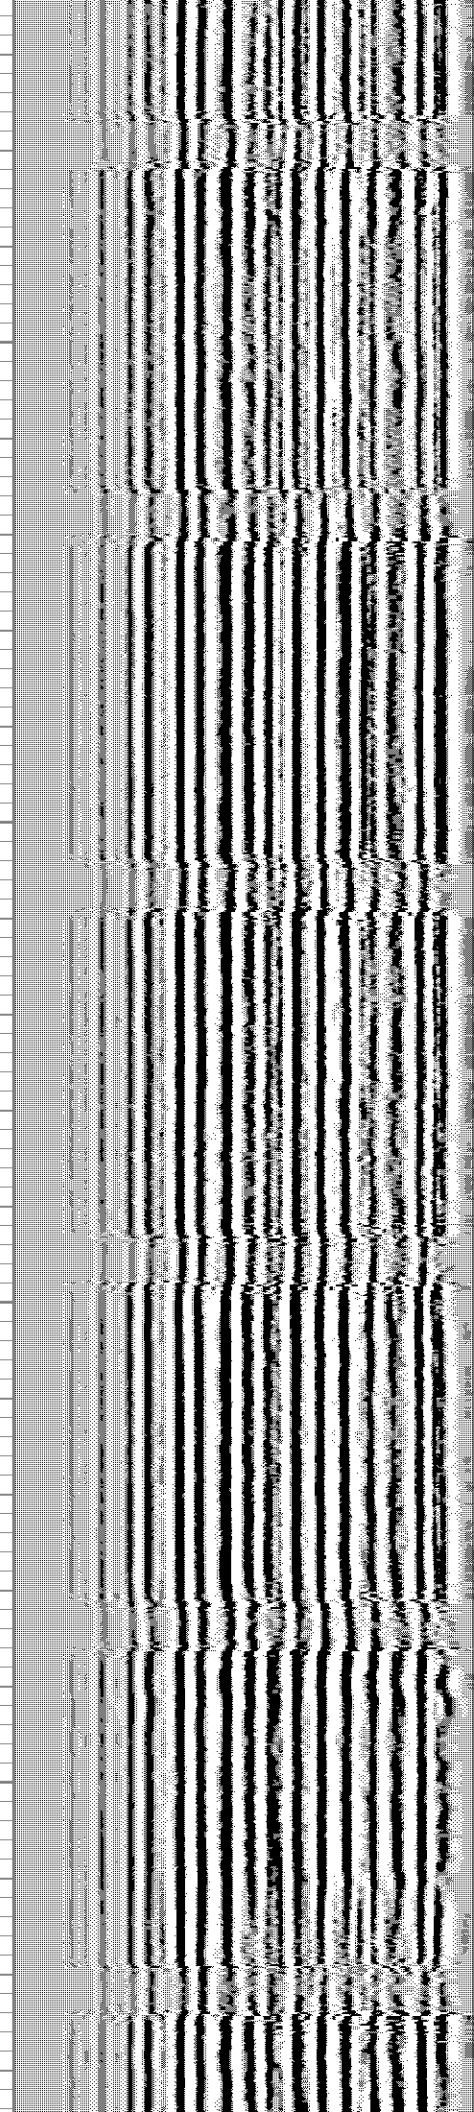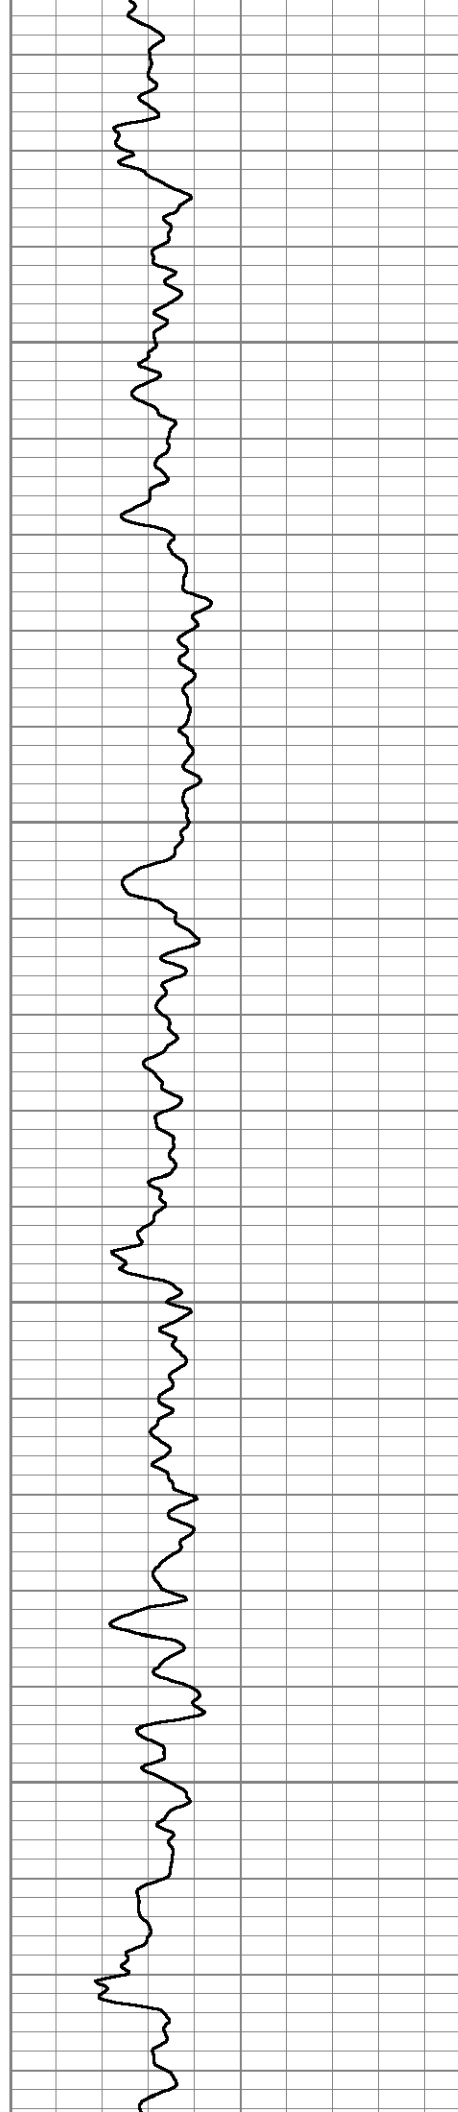

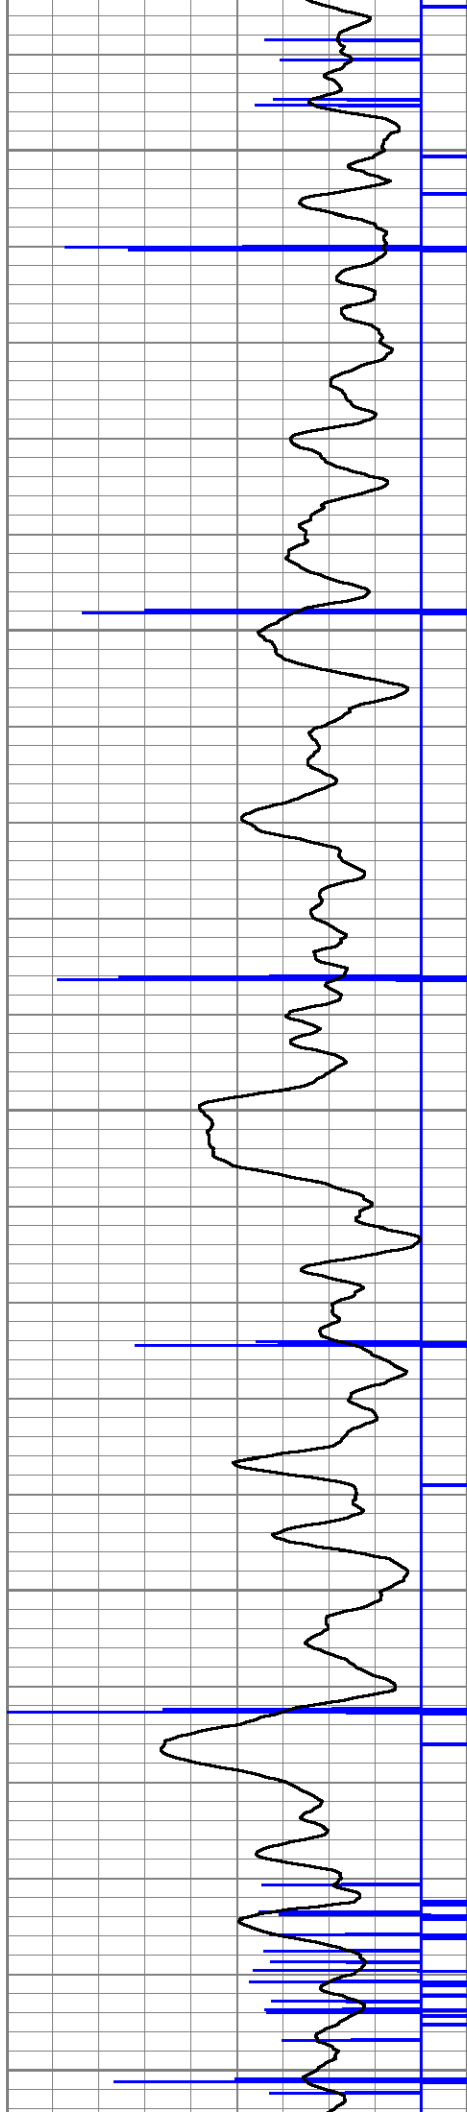



3150


3200

3250

3300

3350

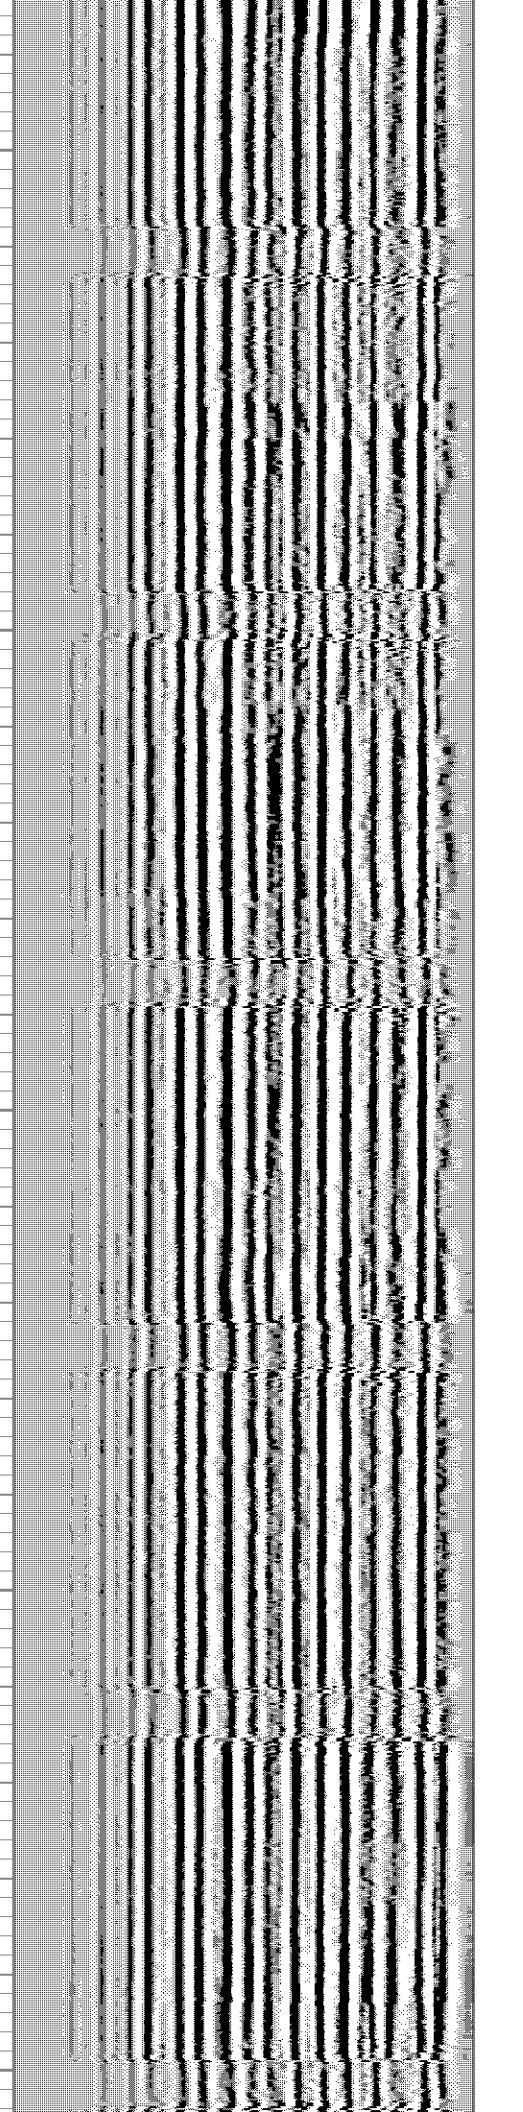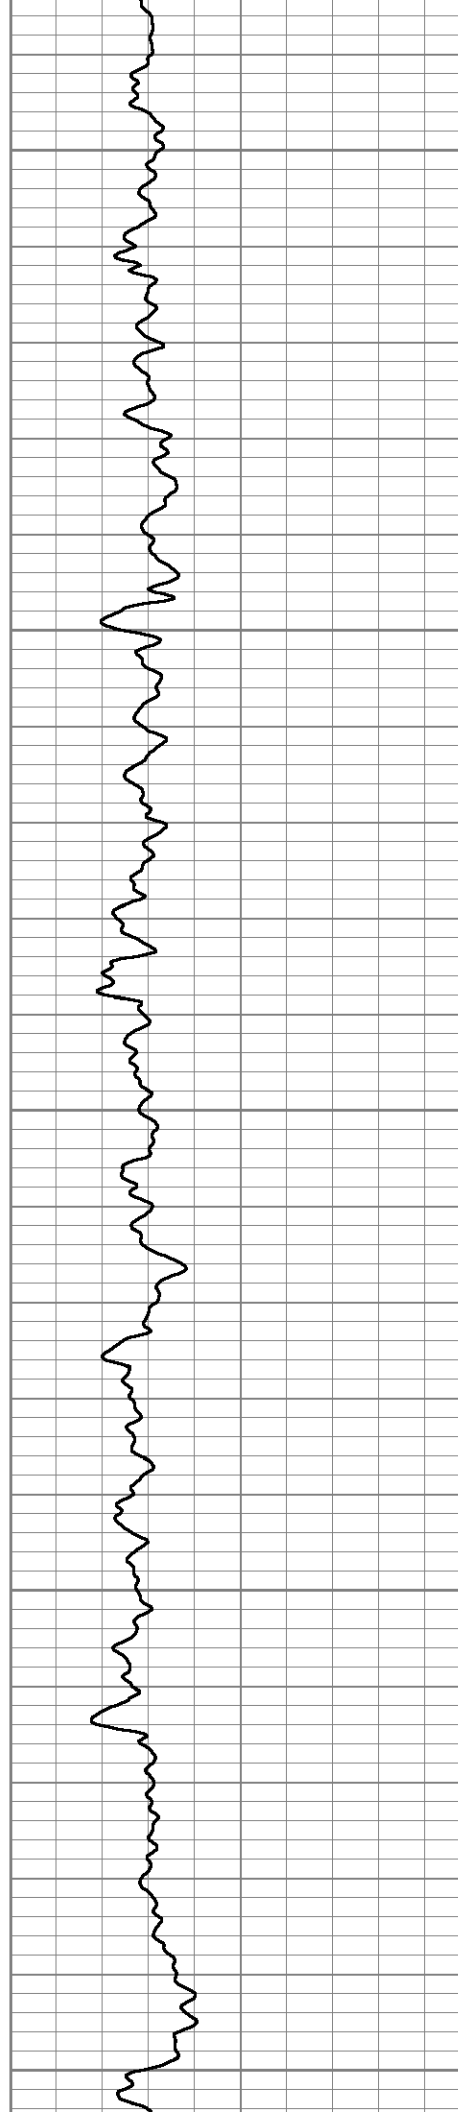


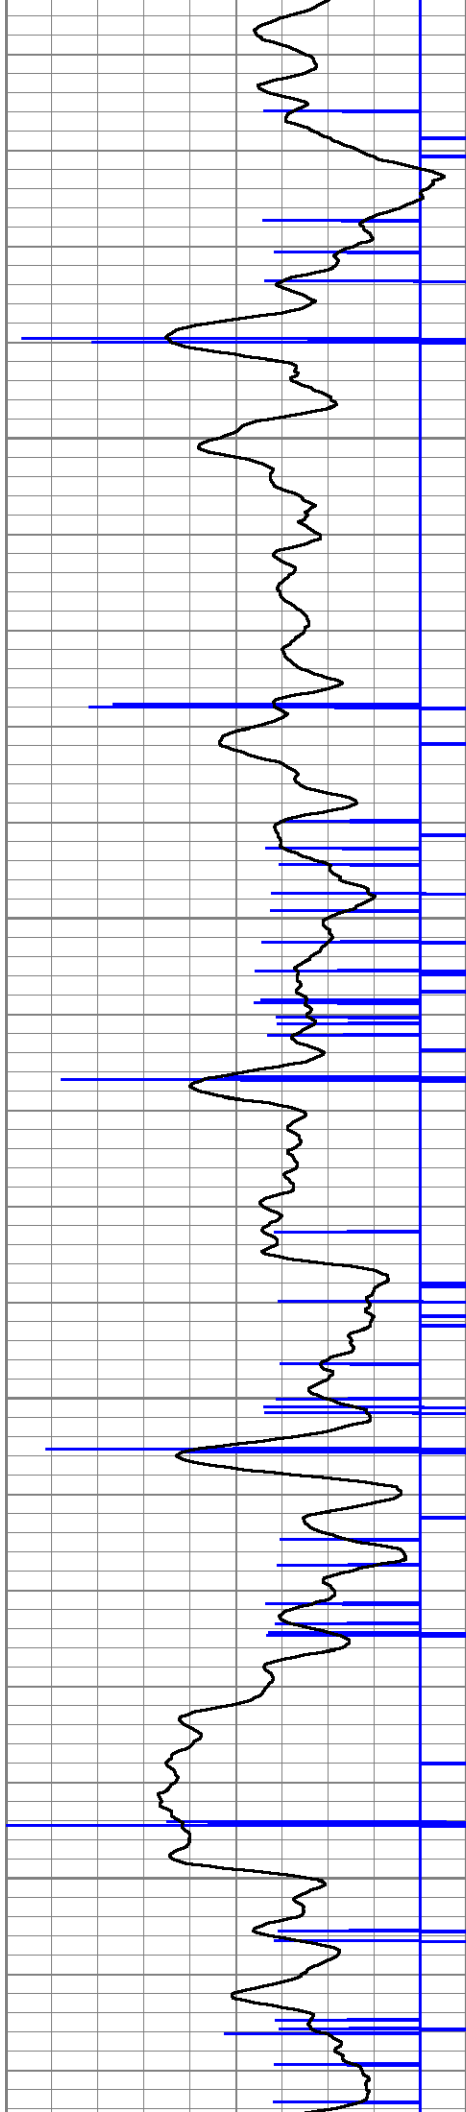



3400

3450

3500

3550

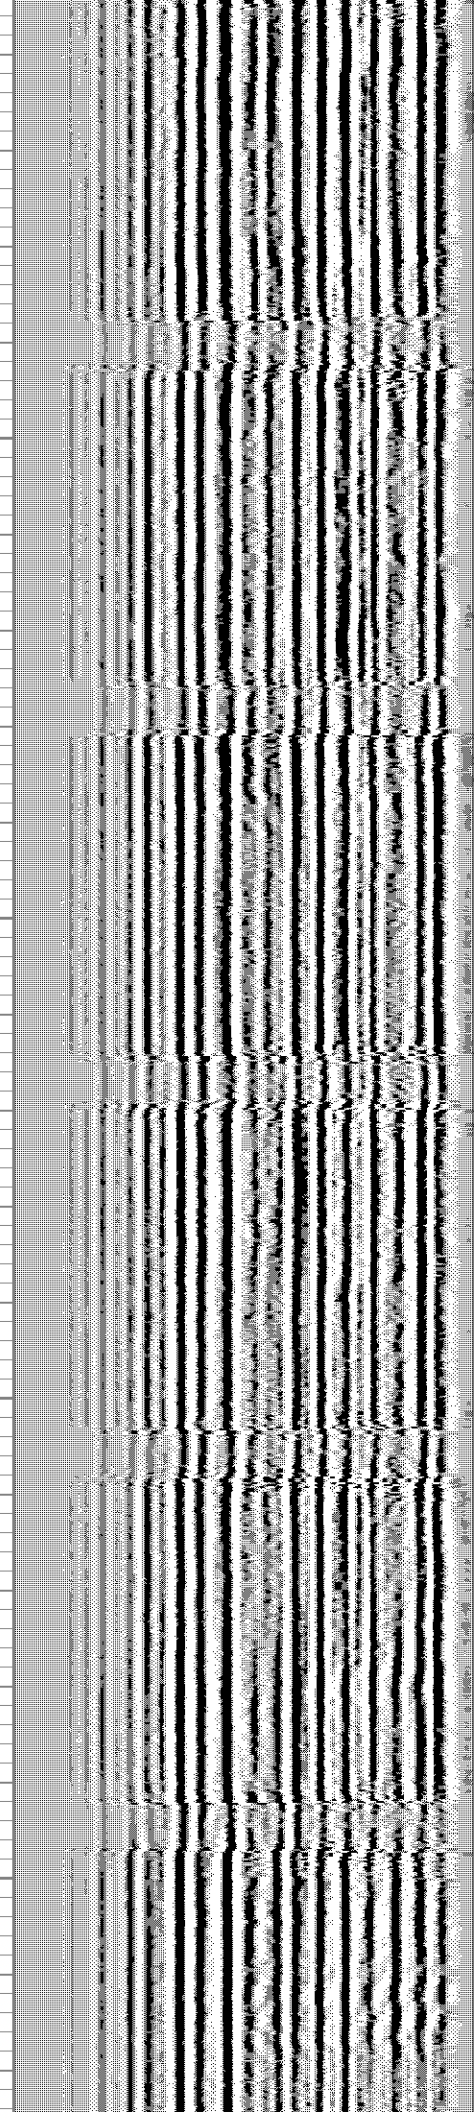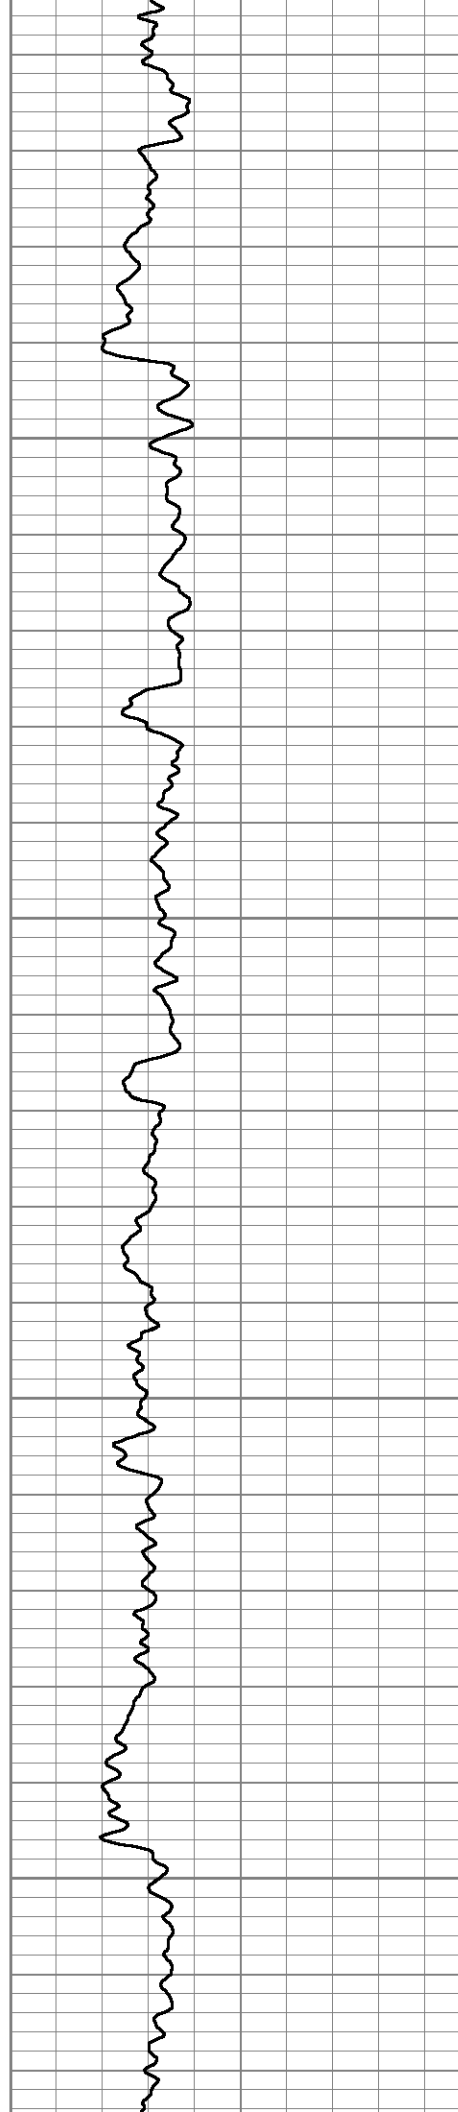


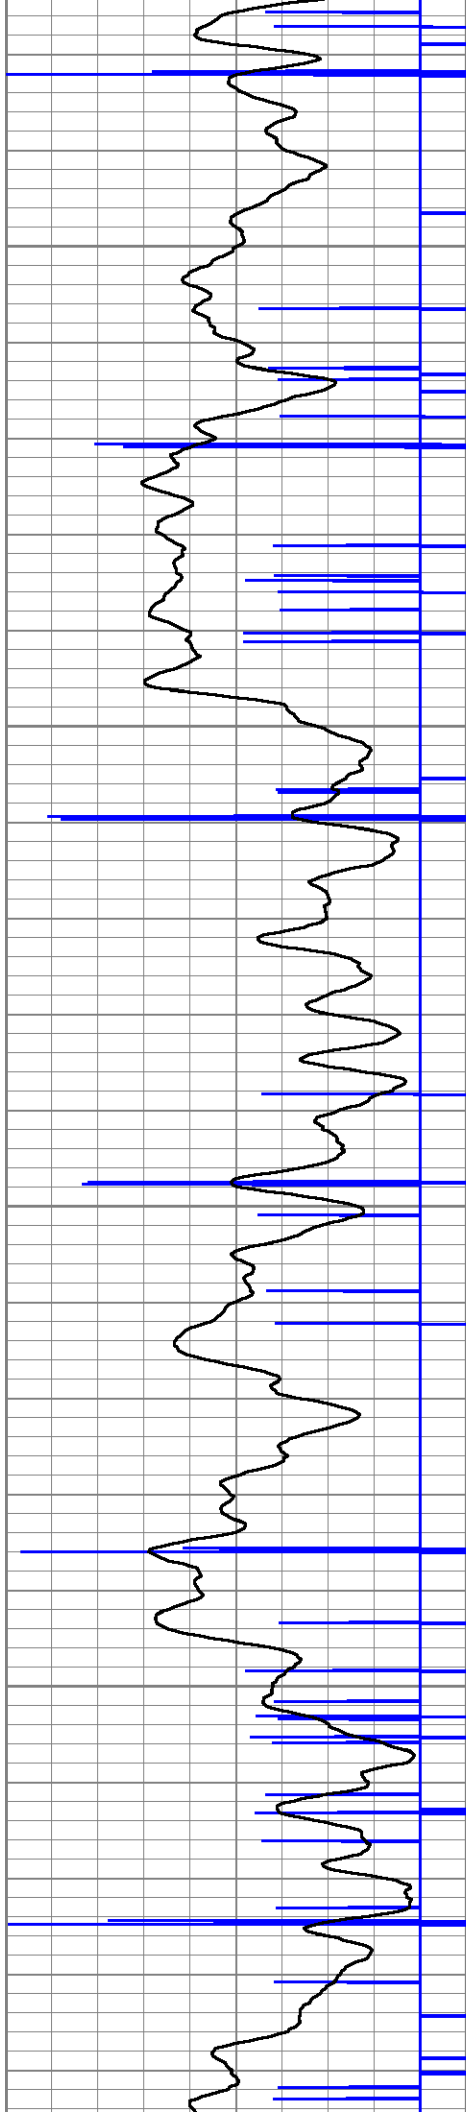



3600

3650

3700

3750

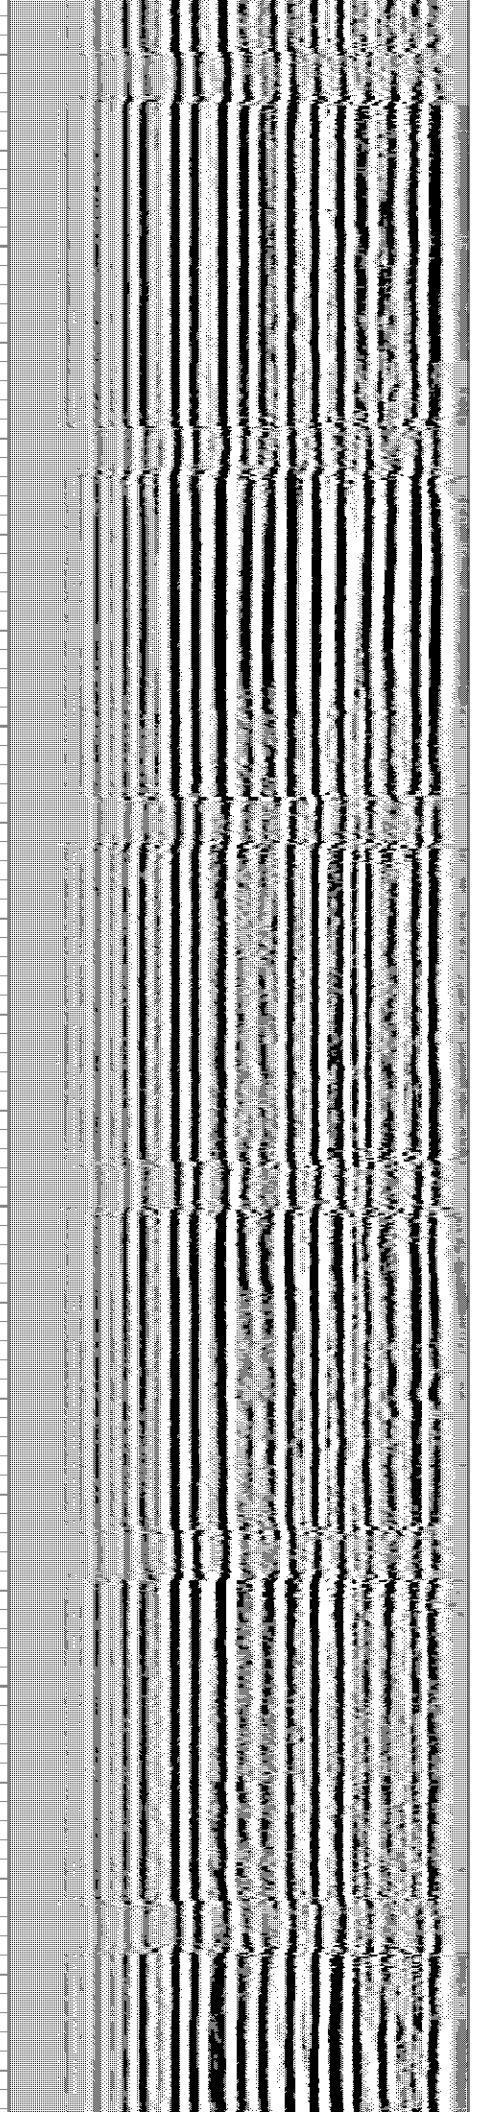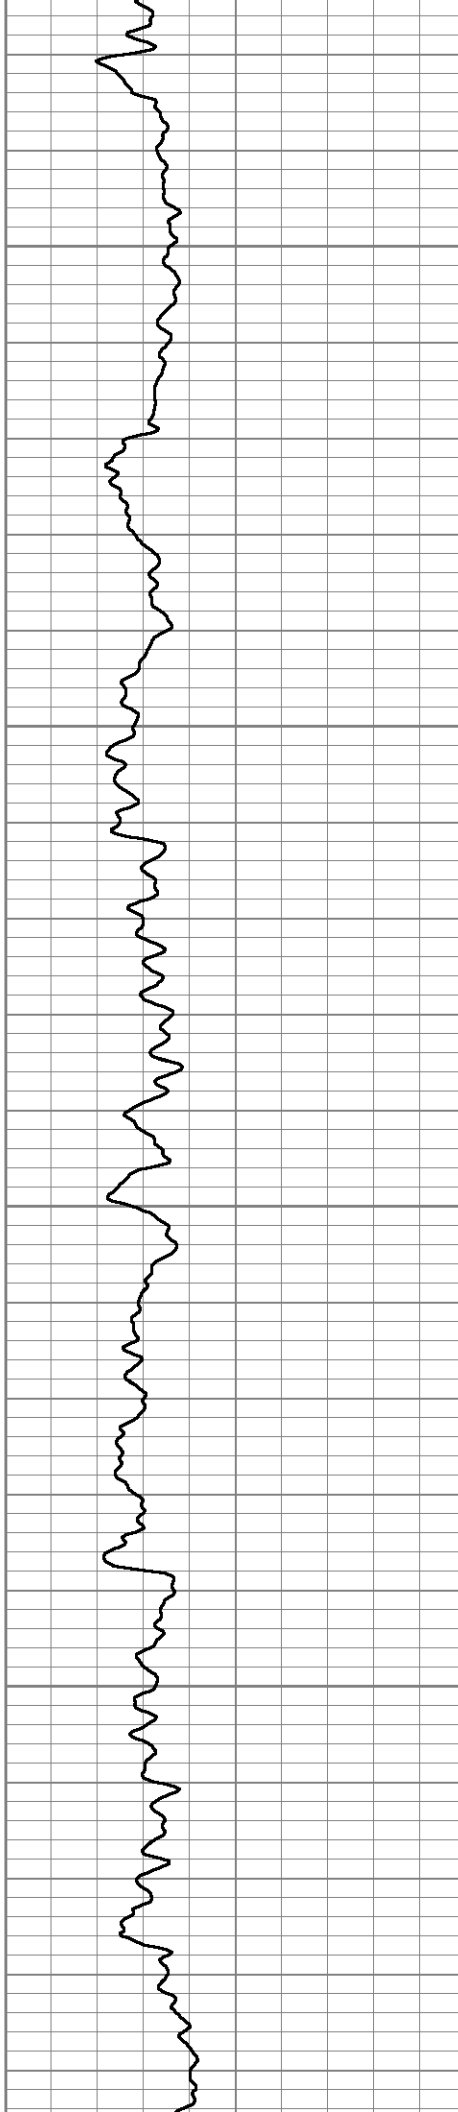

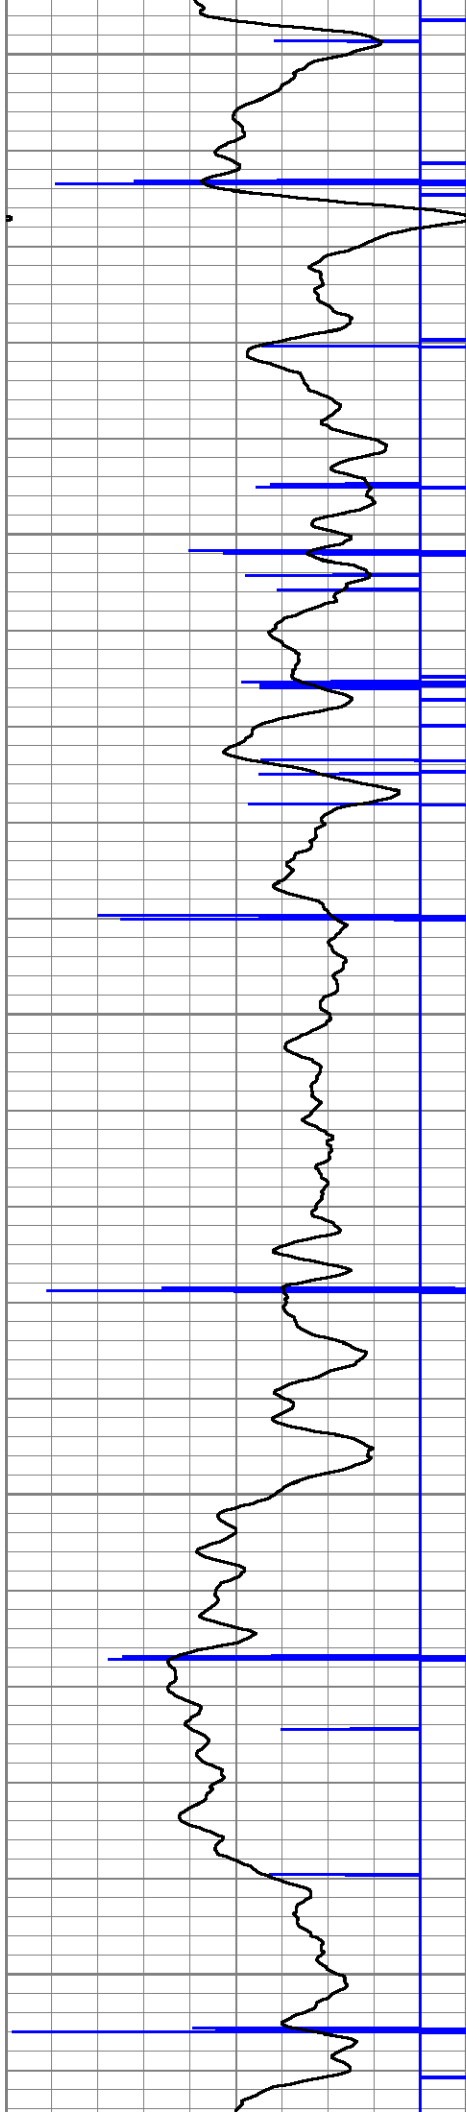


3800


3850

3900

3950

4000

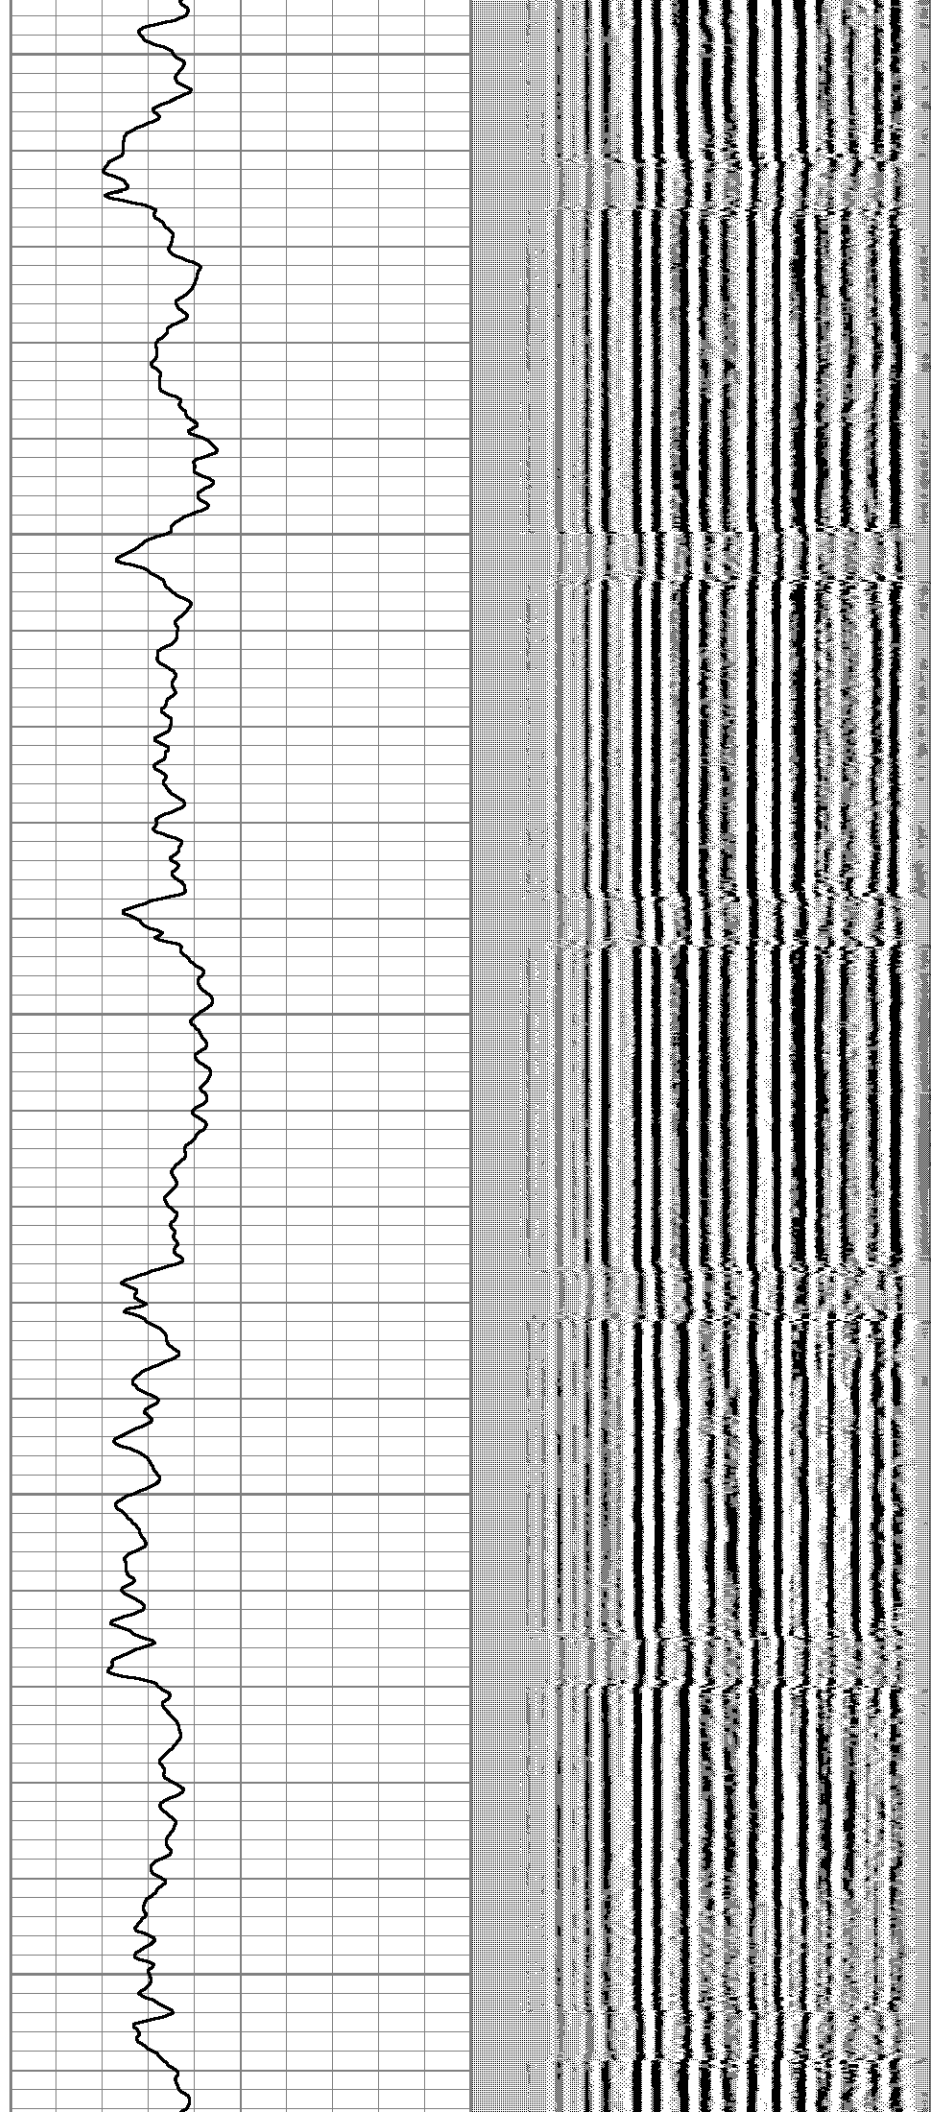


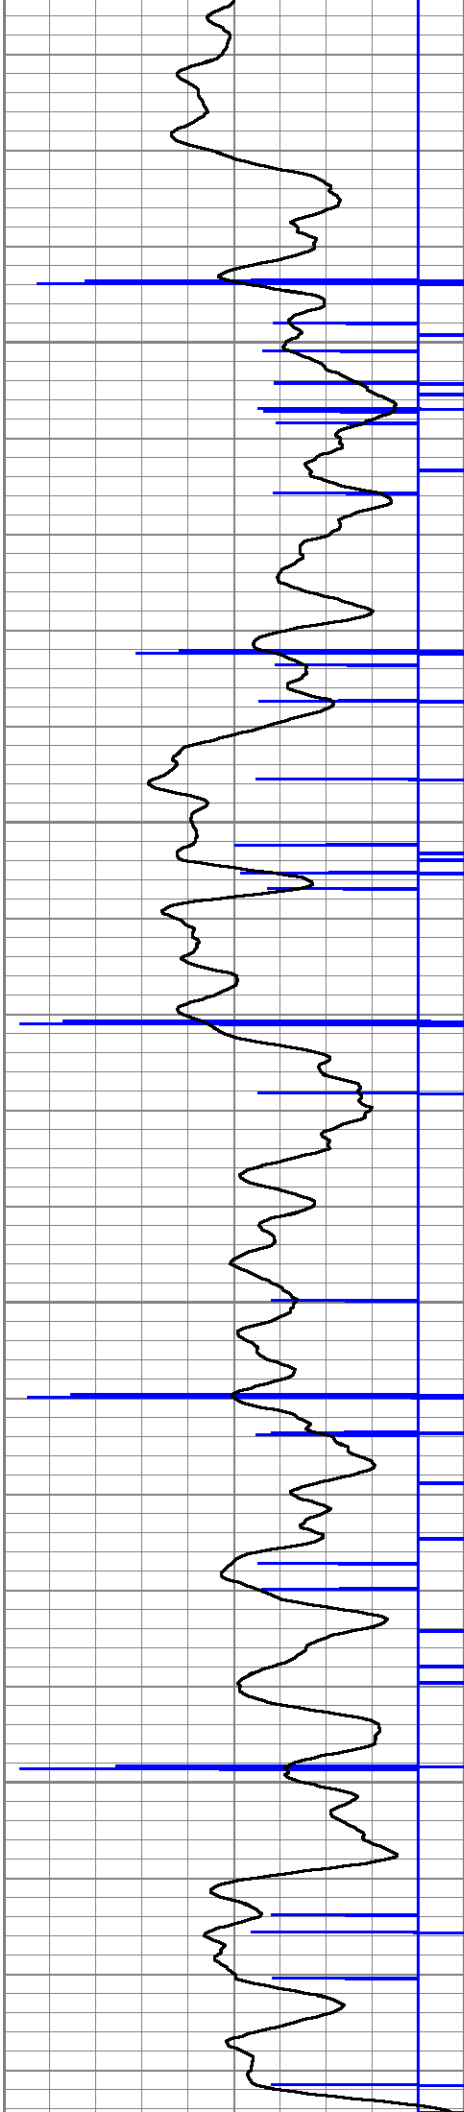



4050

4100

4150

4200

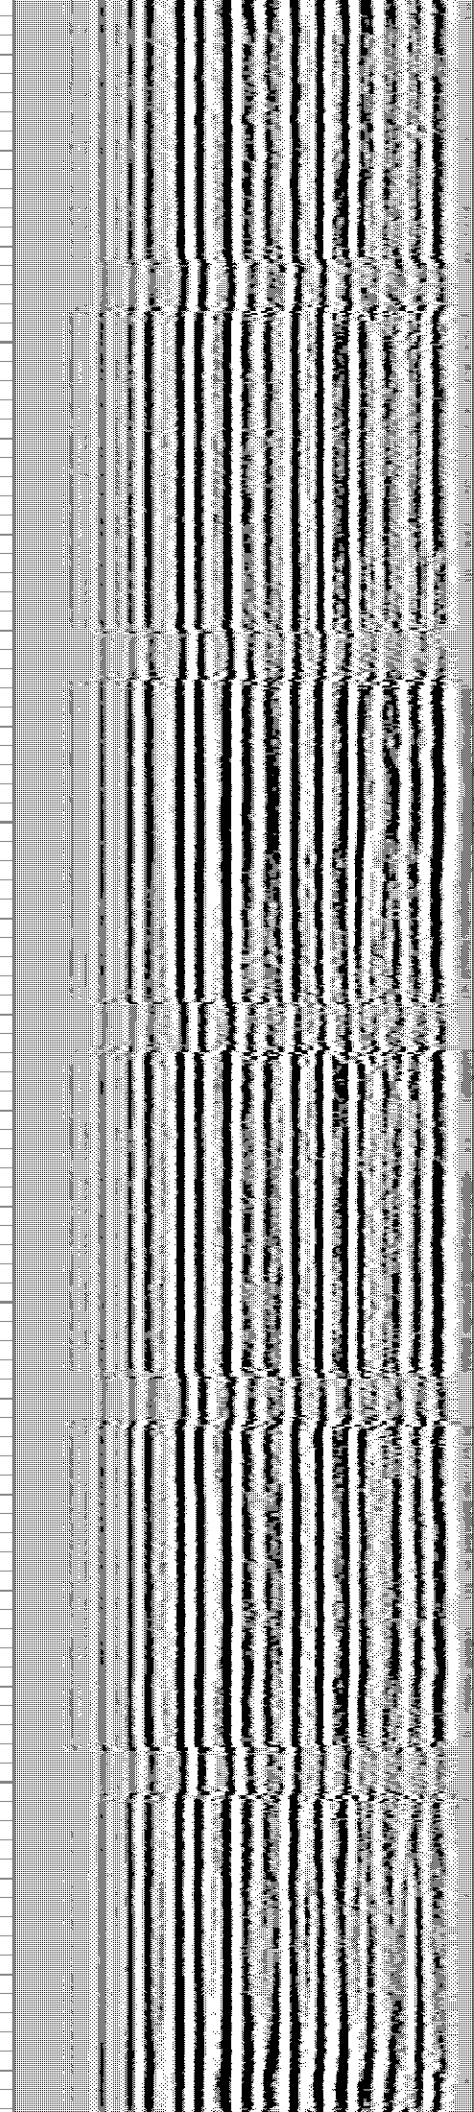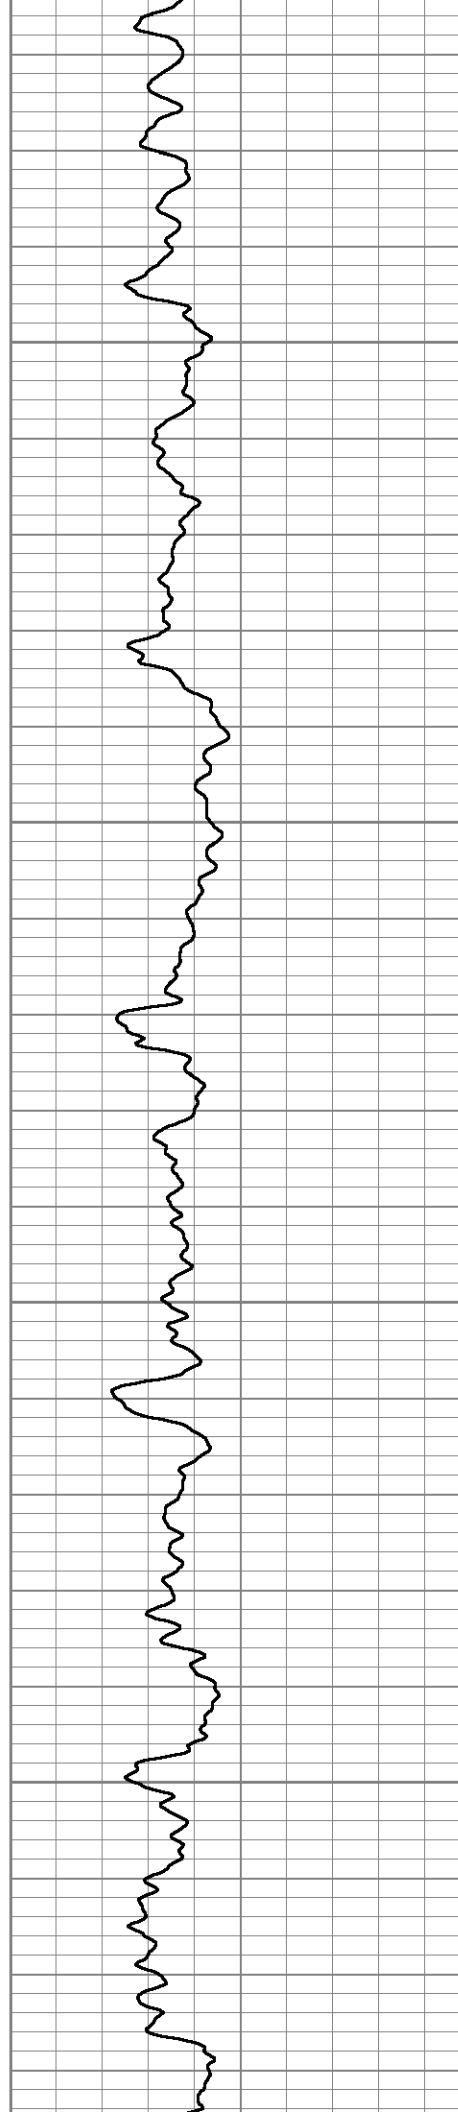

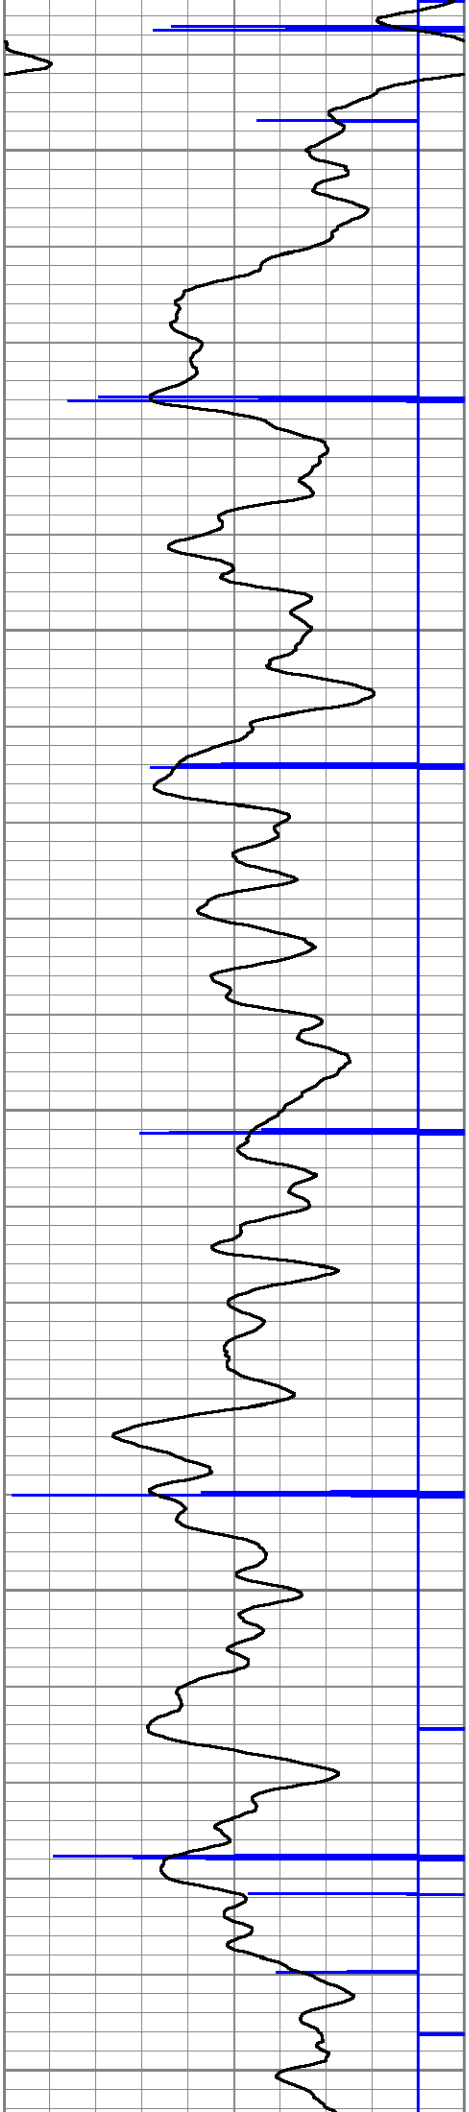



4250


4300

4350

4400

4450

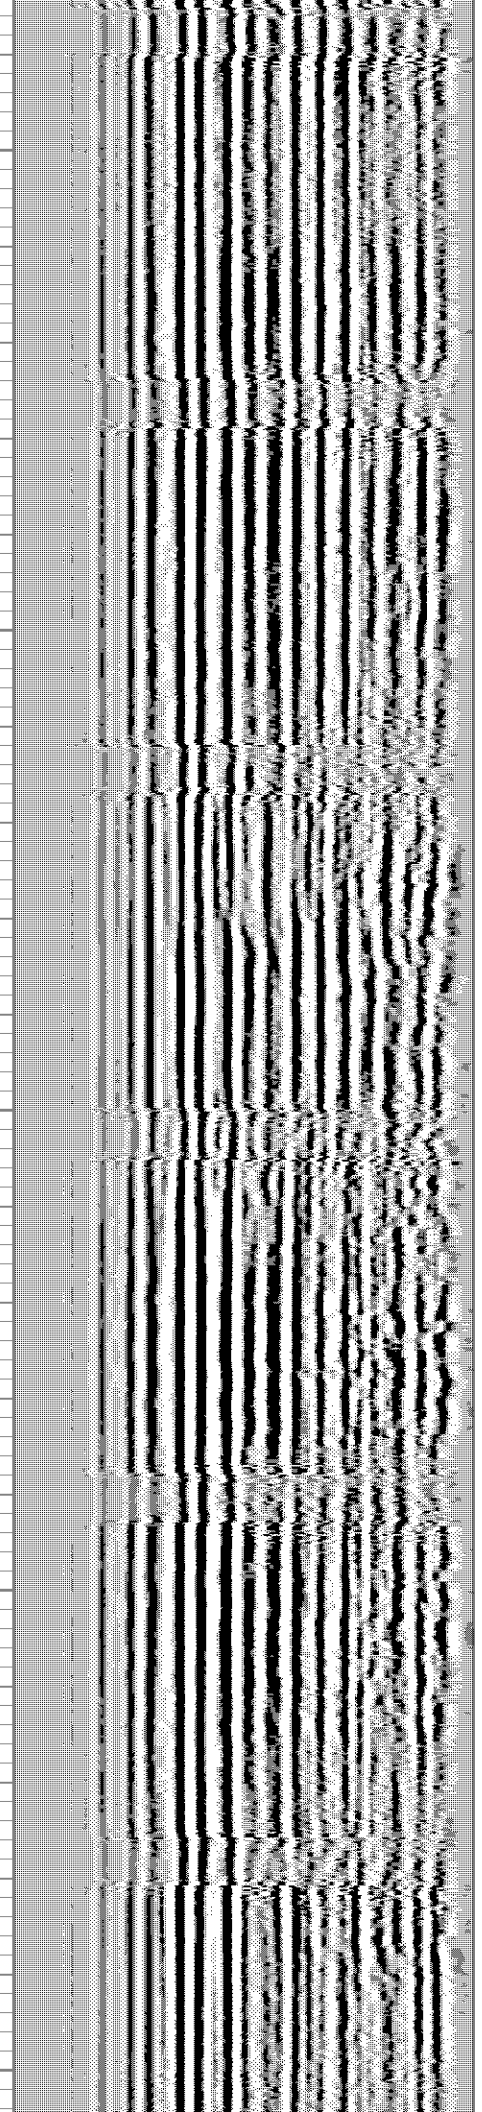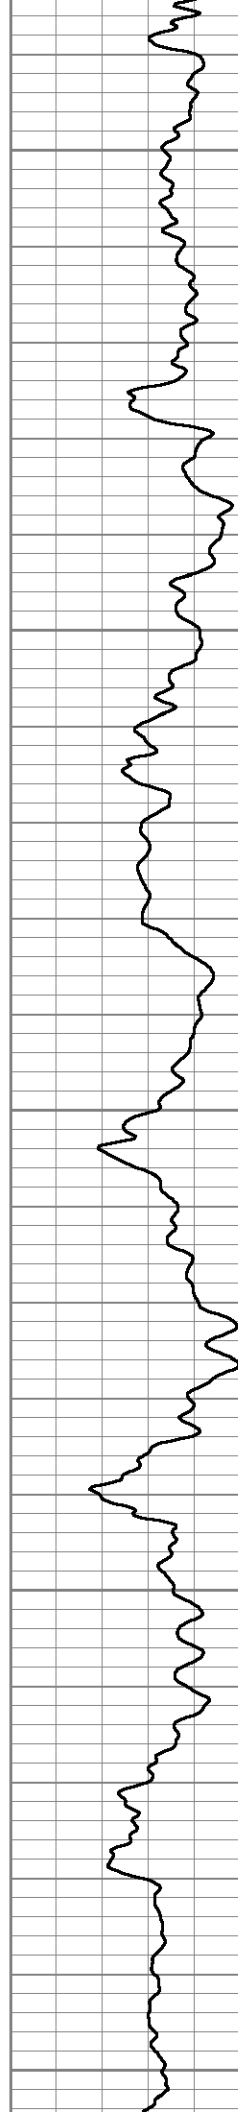


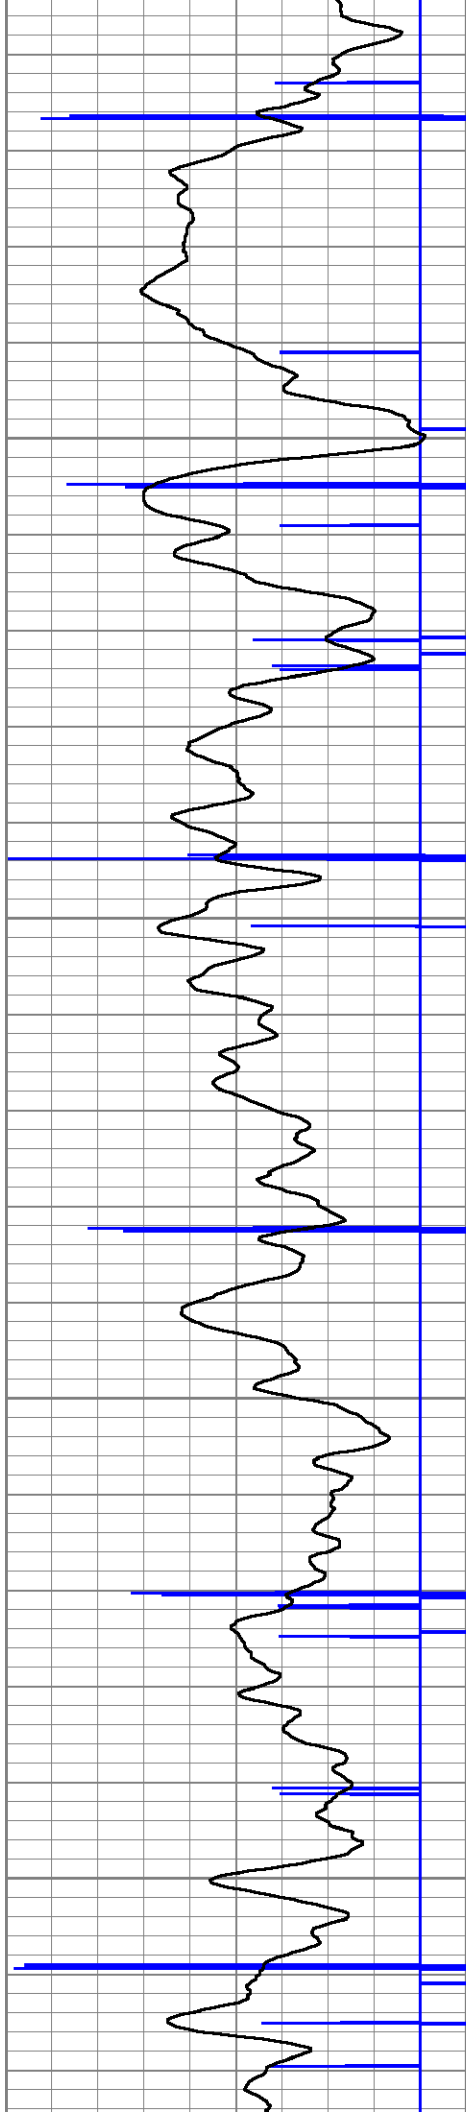



4500

4550

4600

4650

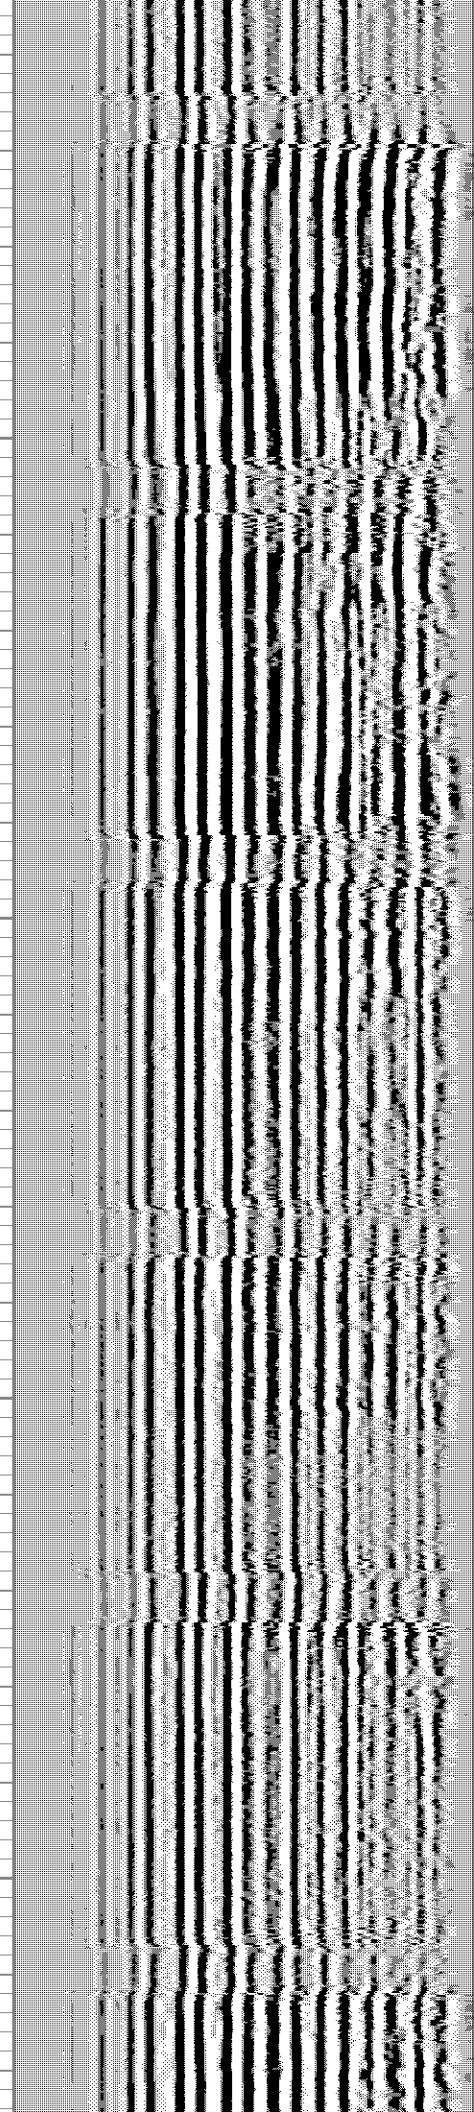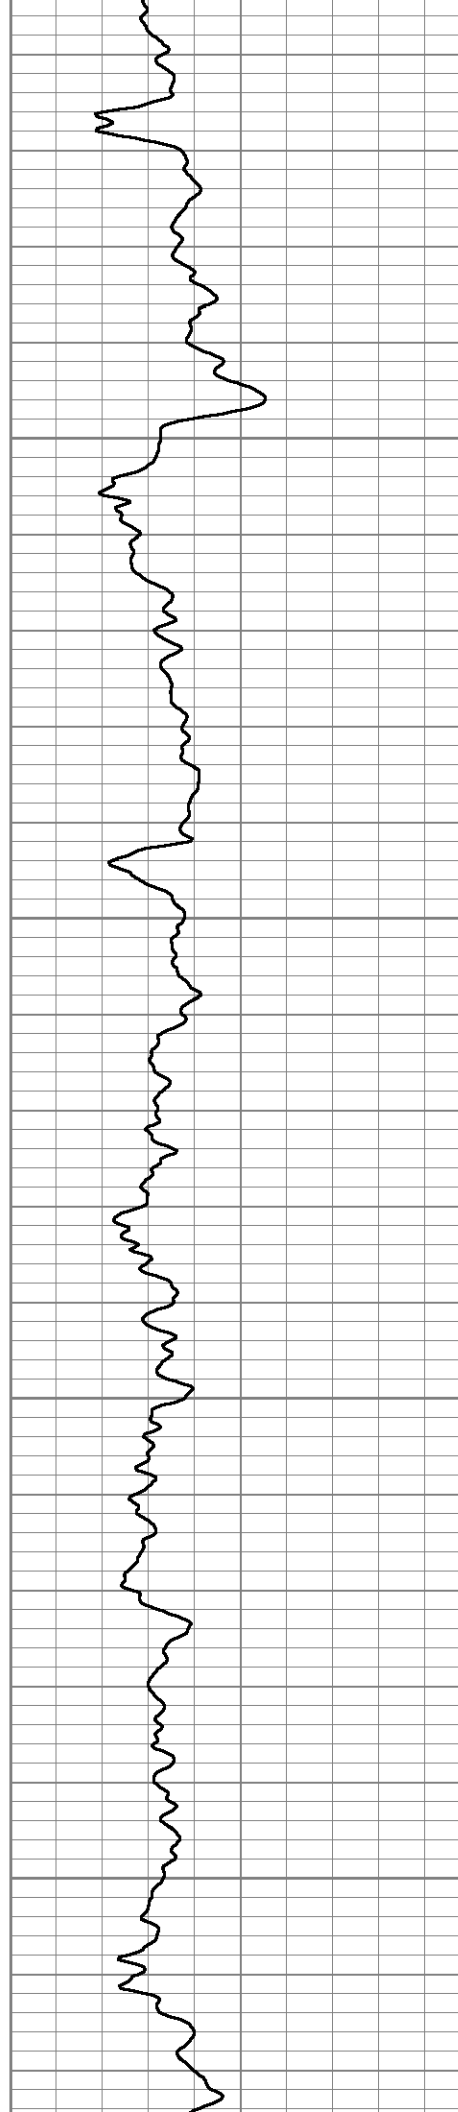


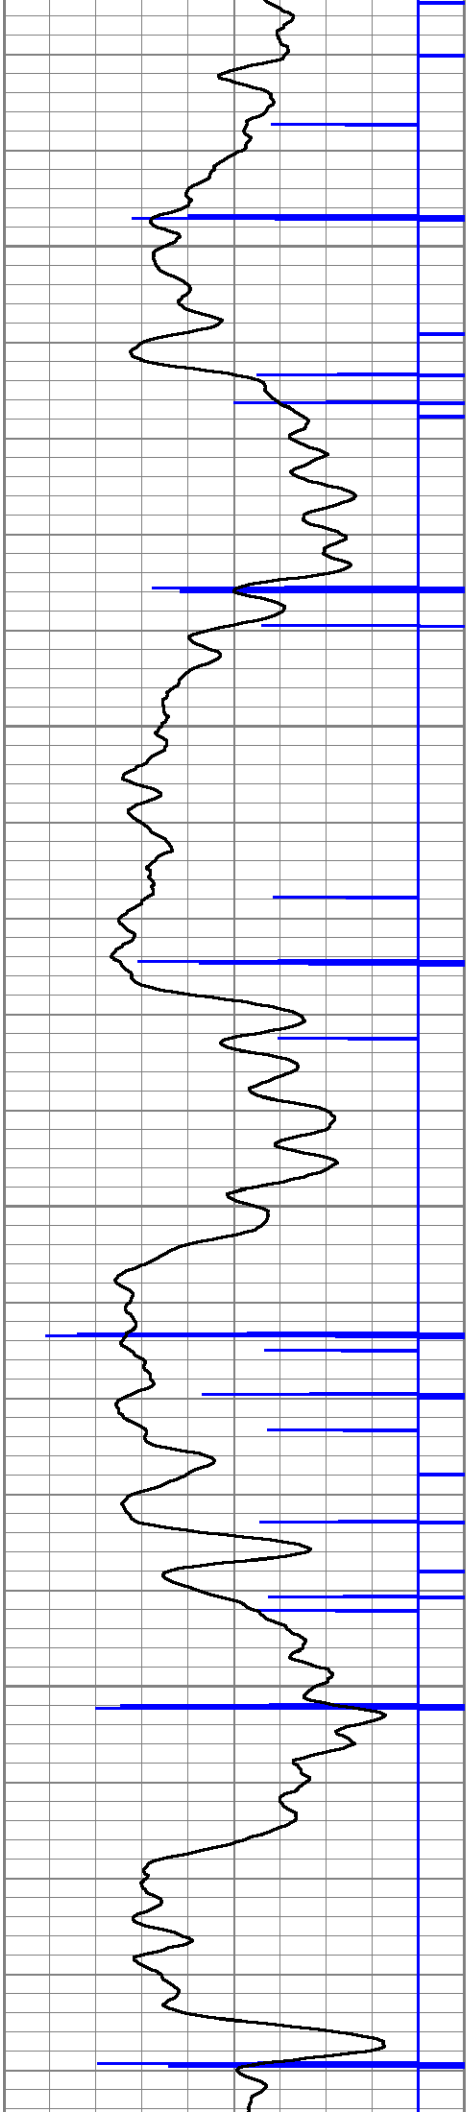



4700

4750

4800

4850

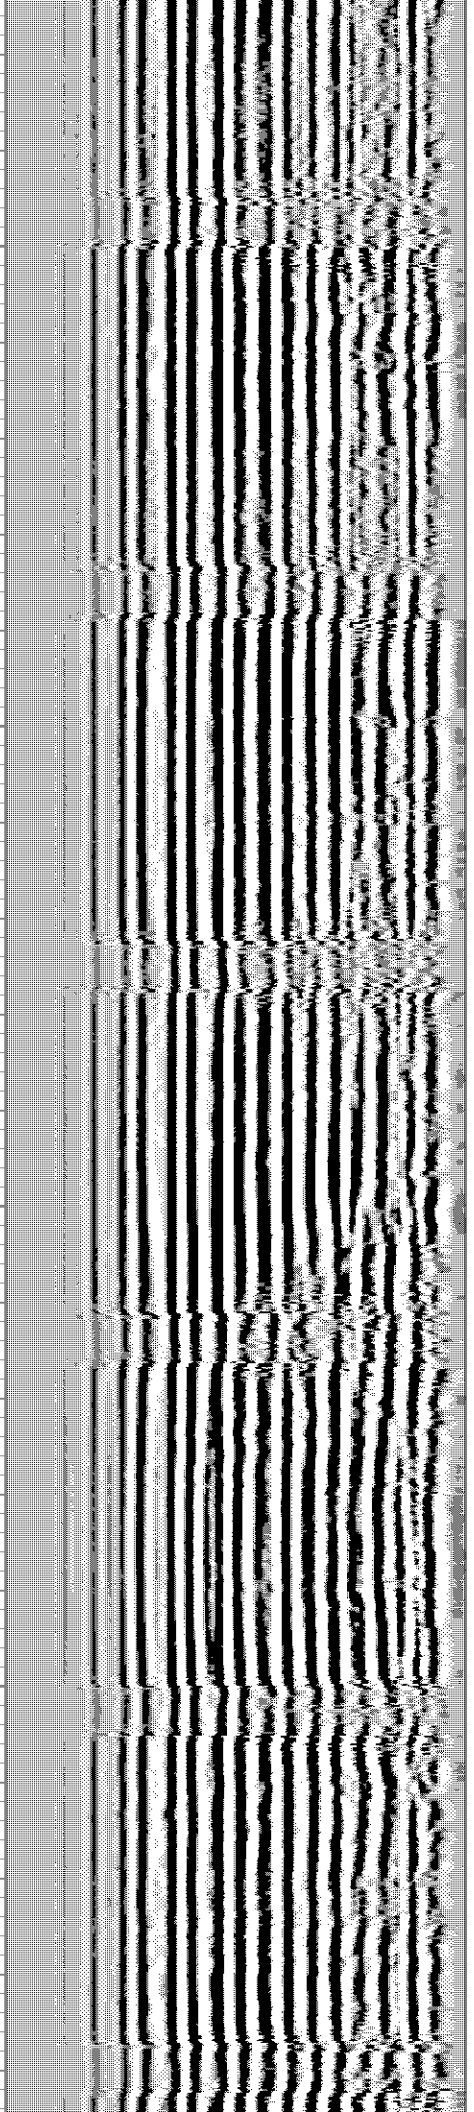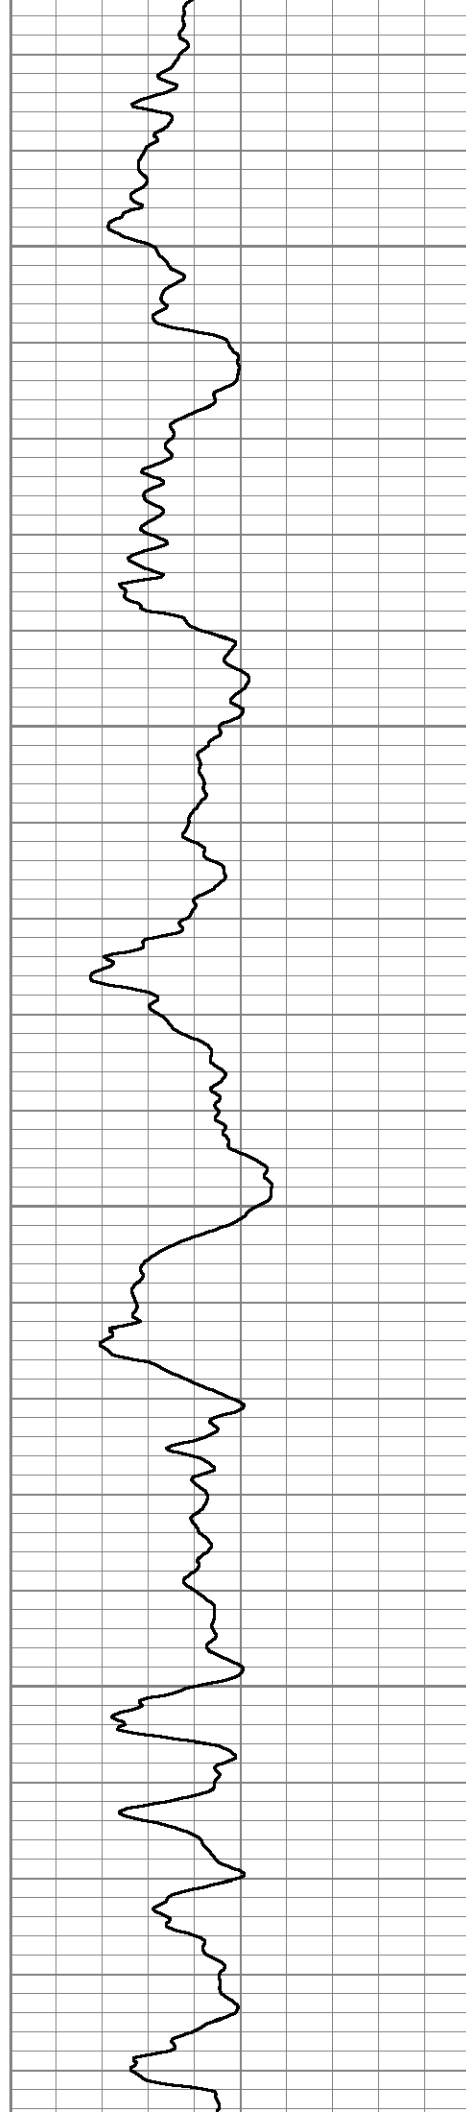

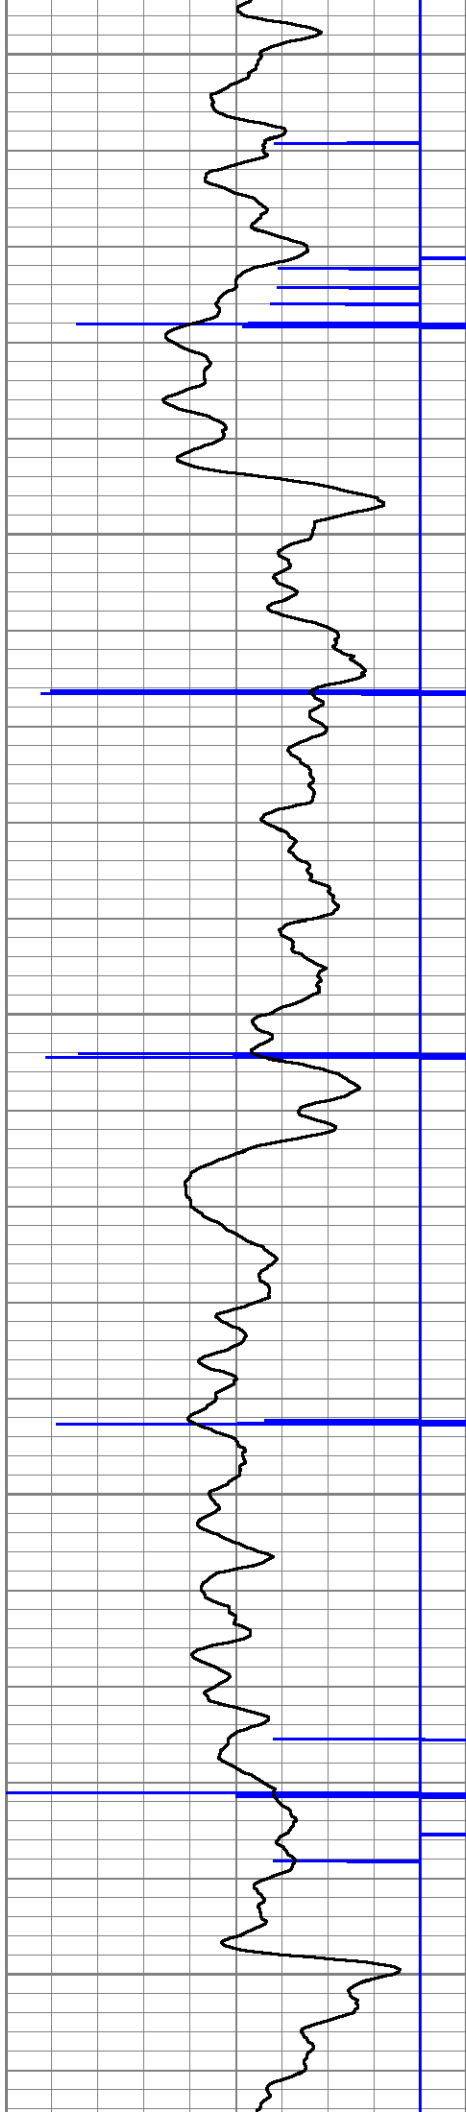



4900


4950

5000

5050

5100

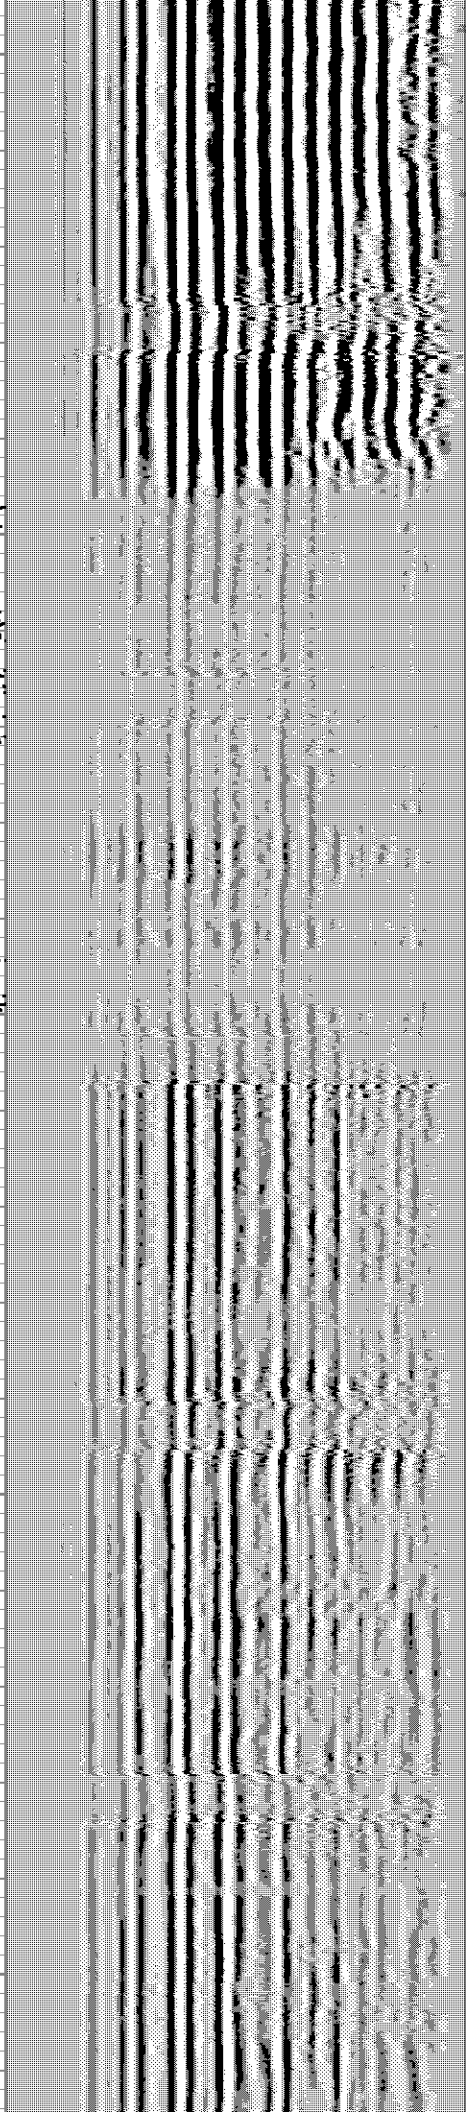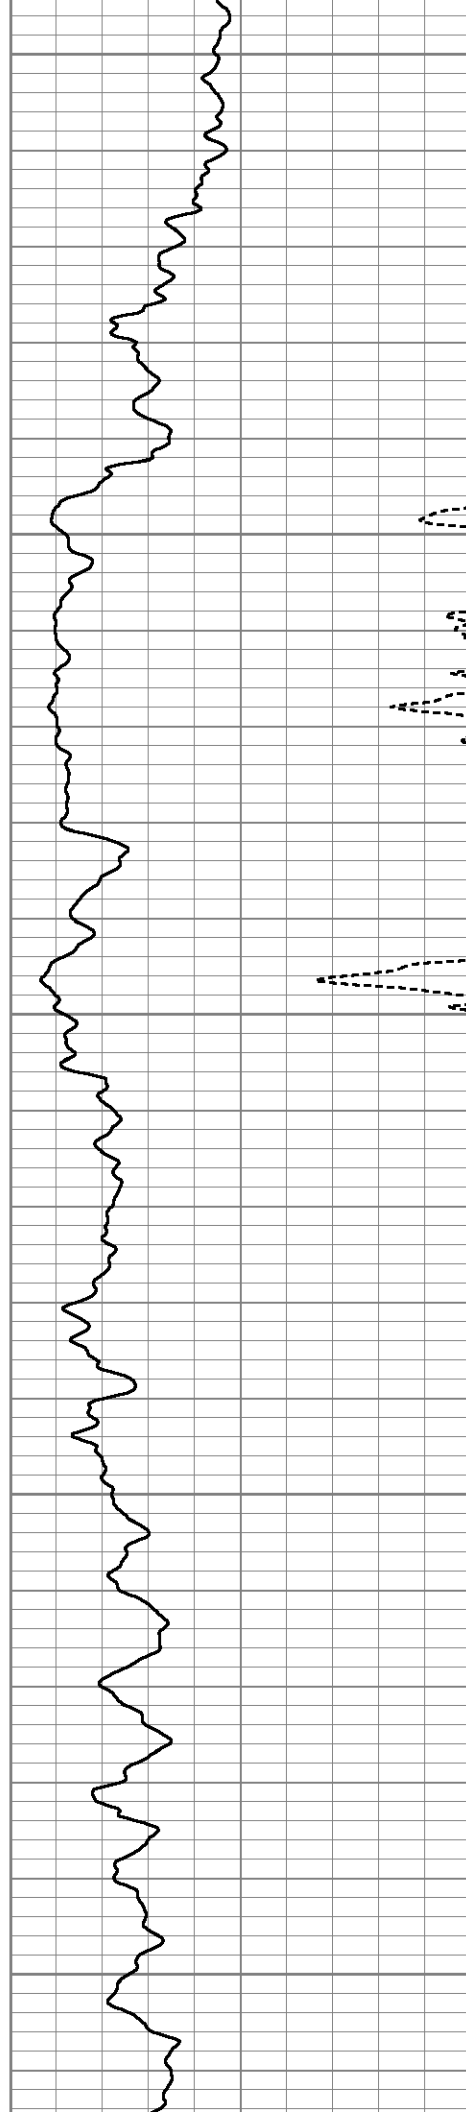

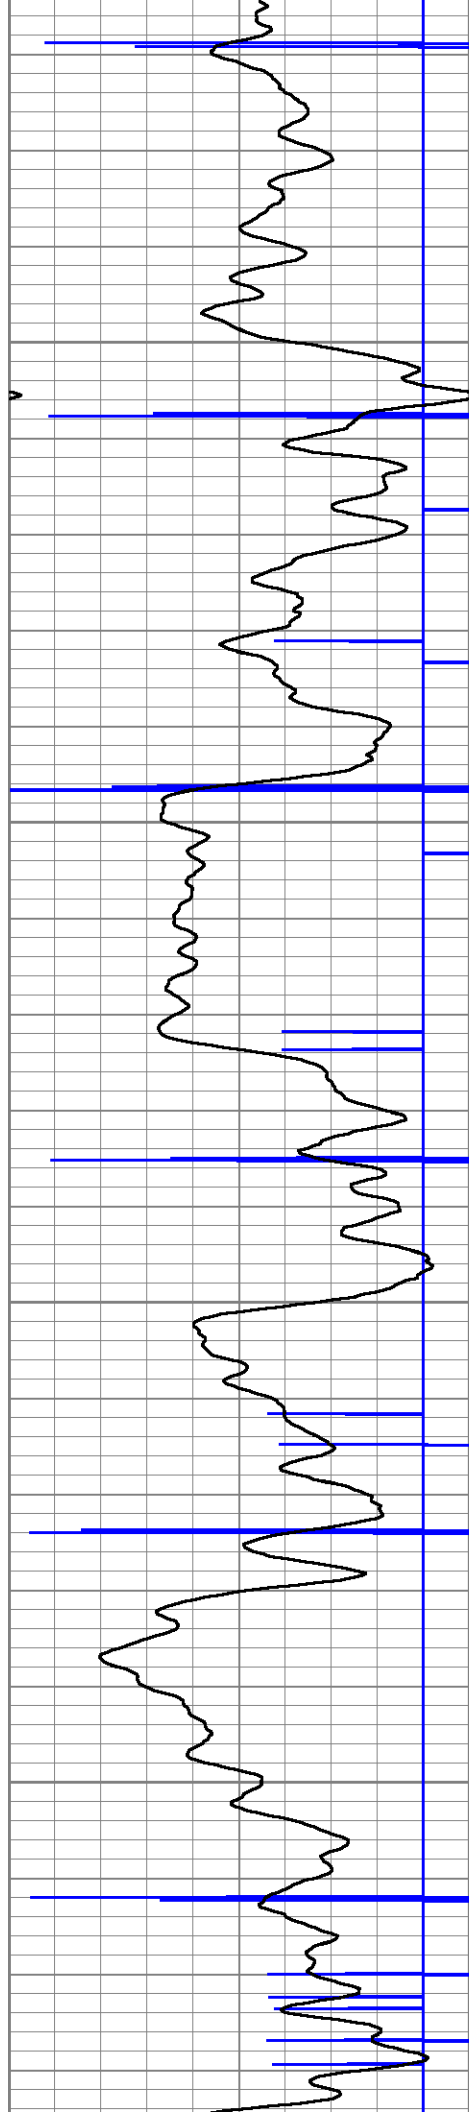



5150

5200

5250

5300

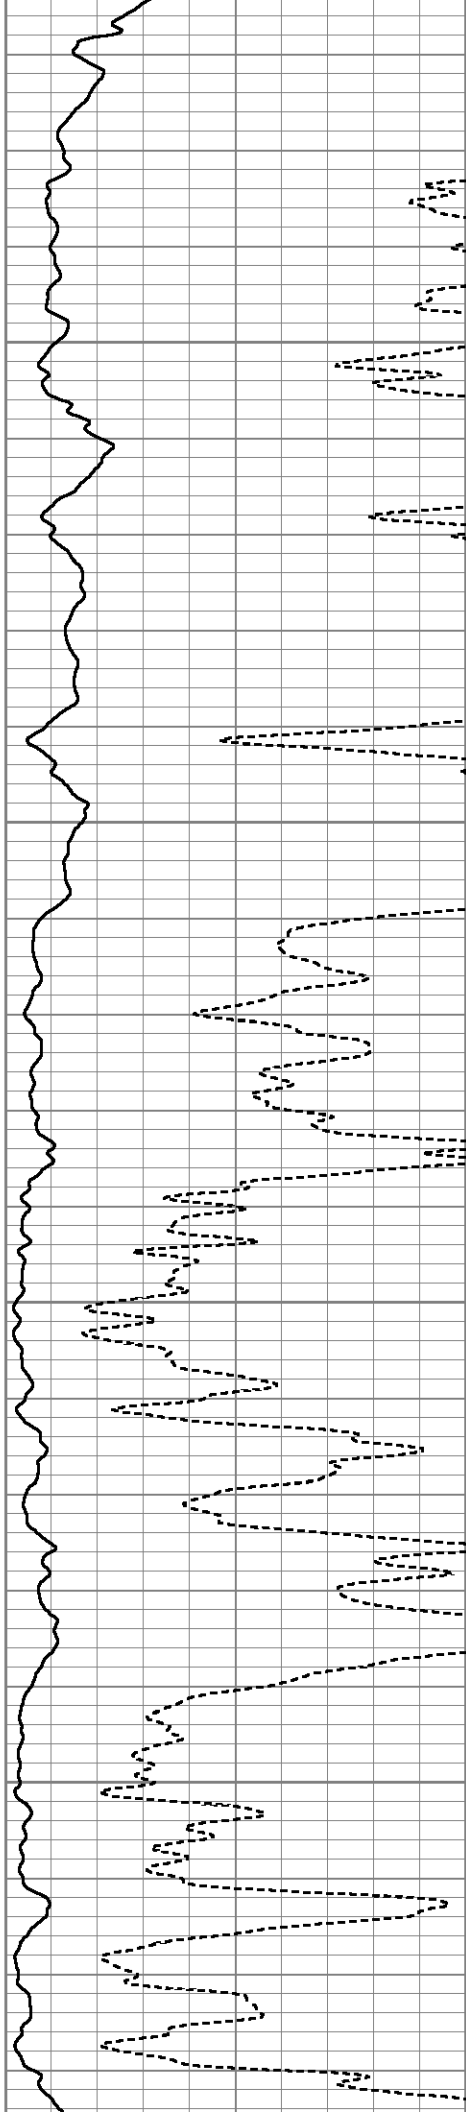

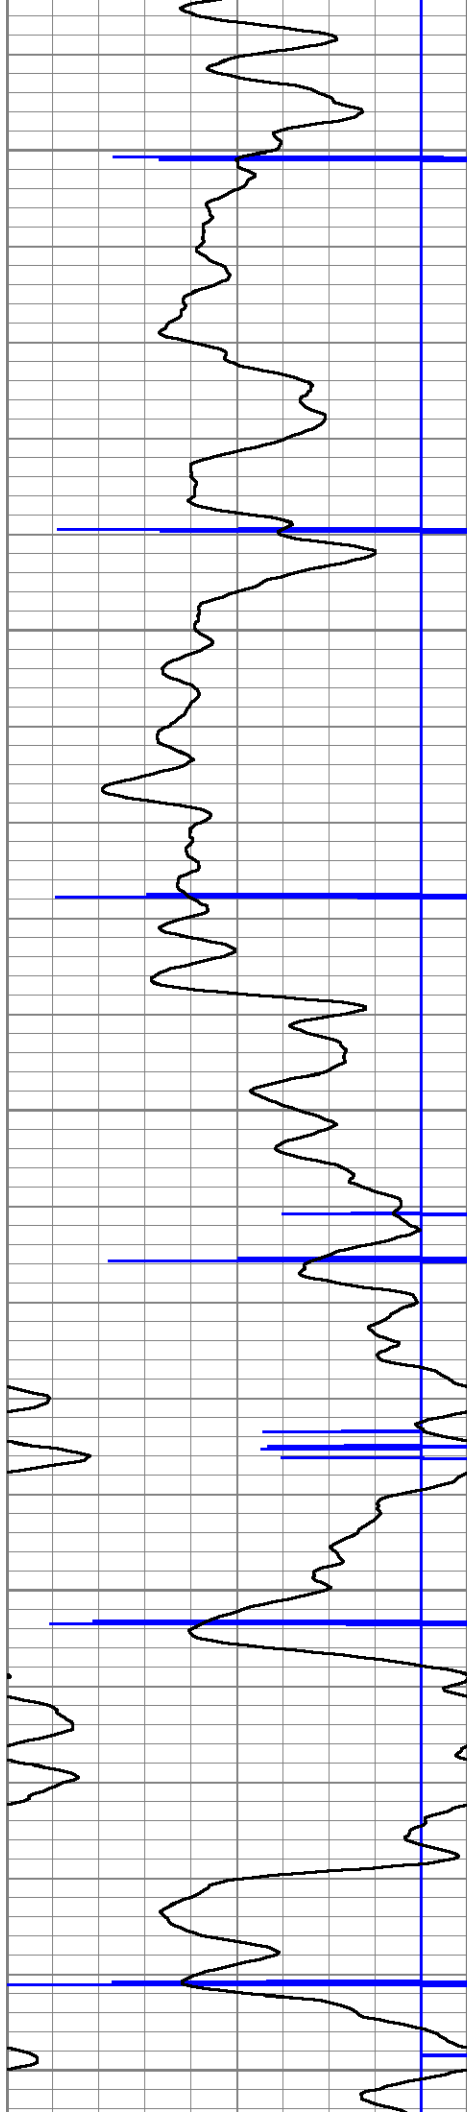



5350


5400

5450

5500

5550

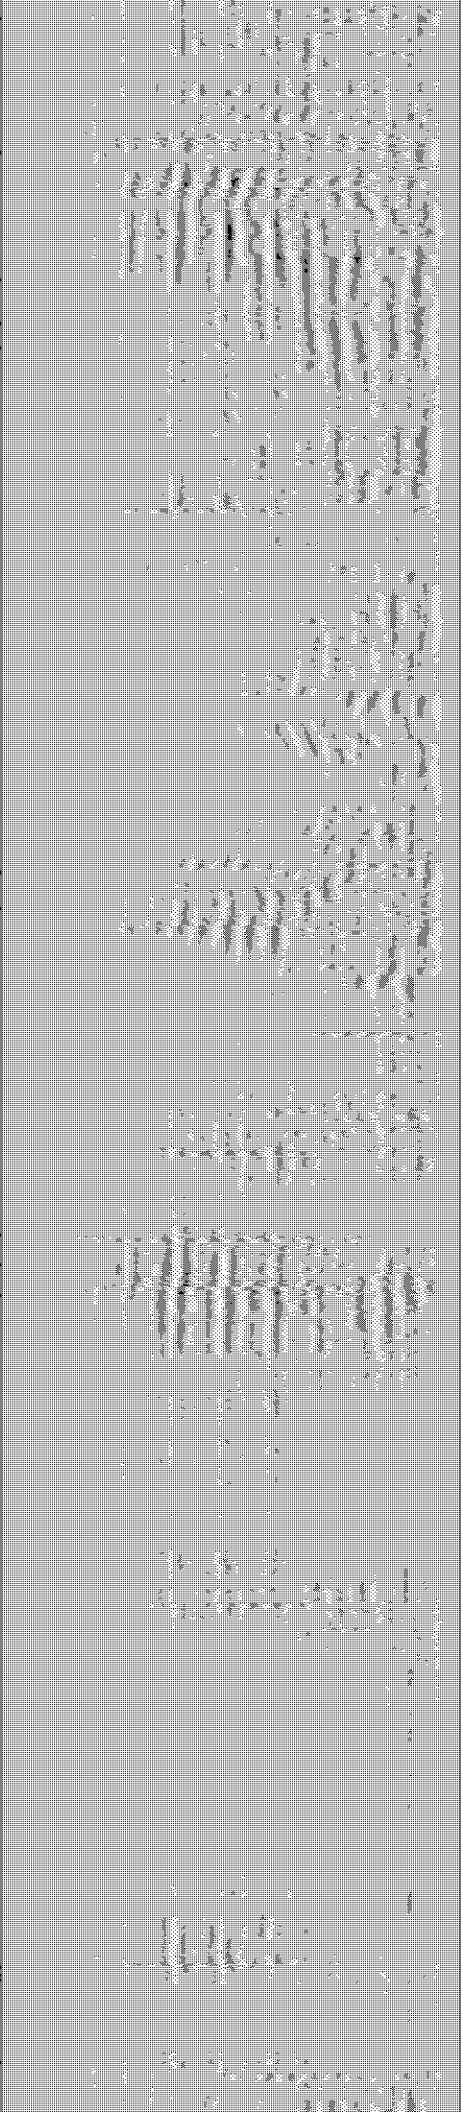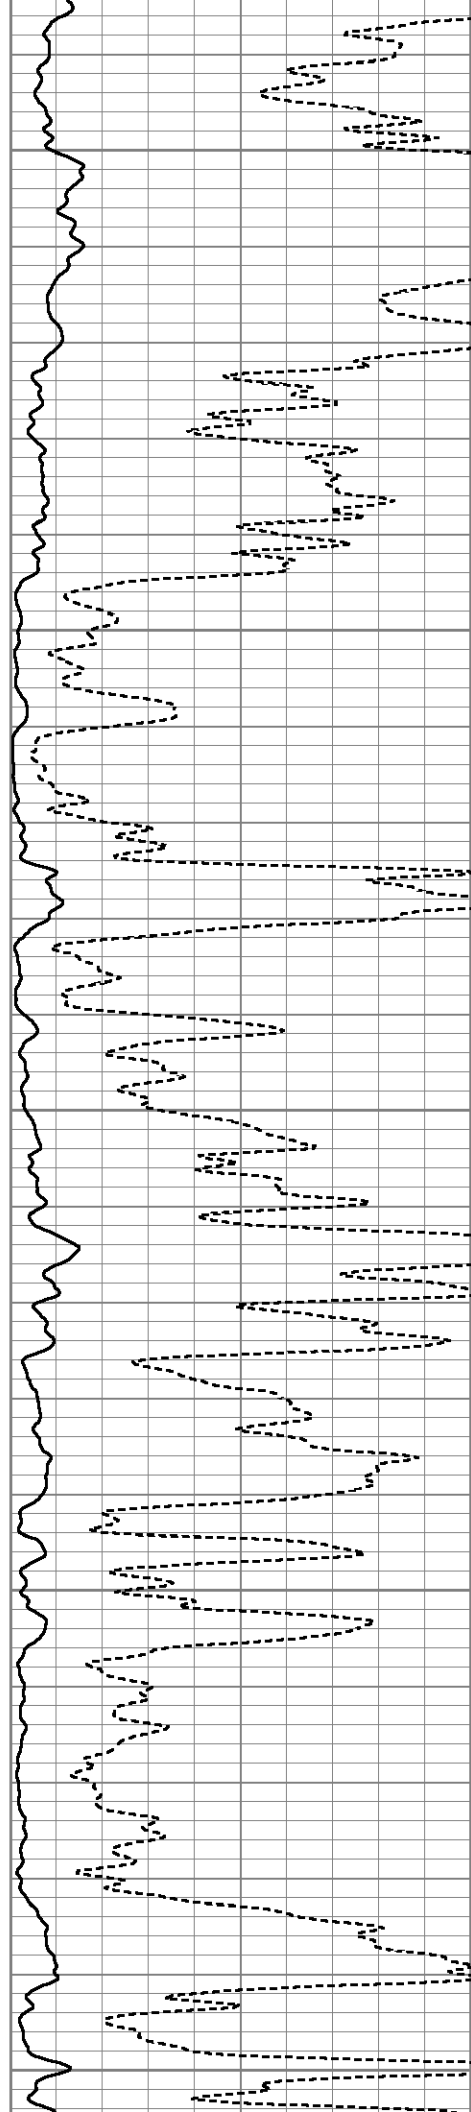

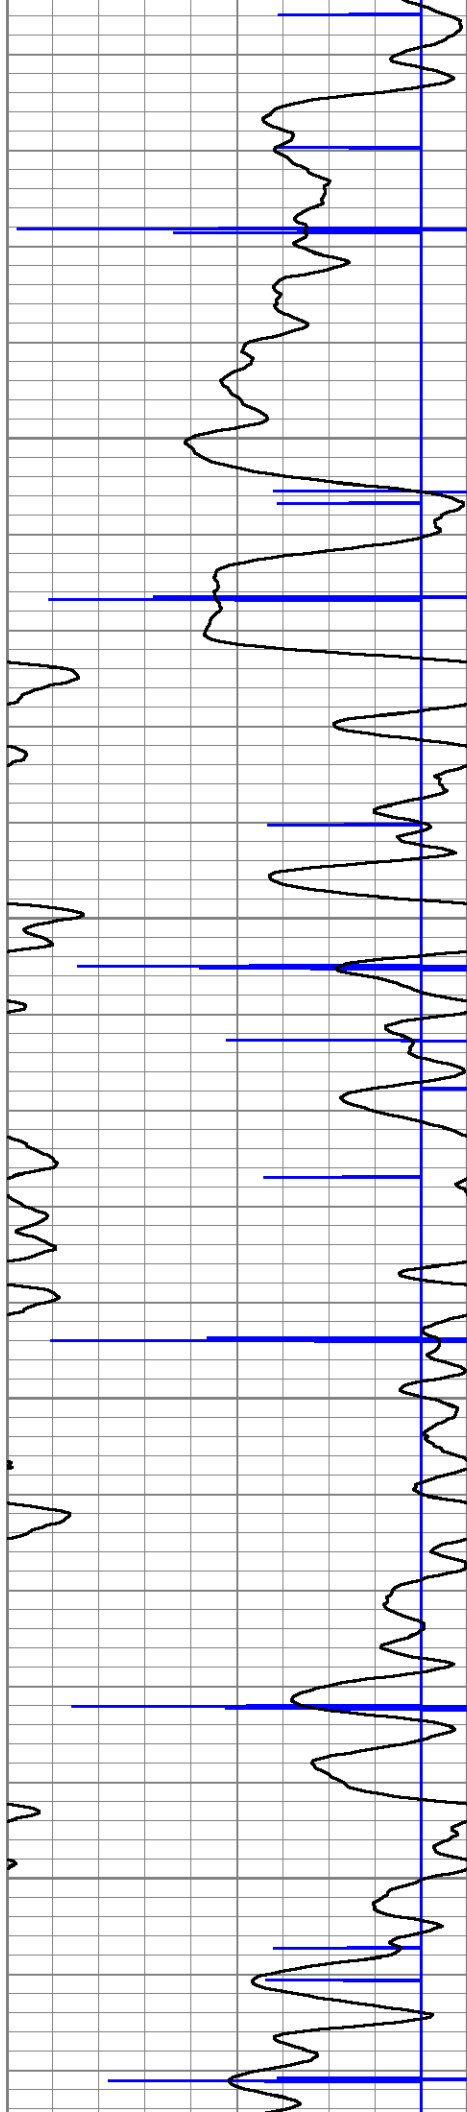



5600

5650

5700

5750

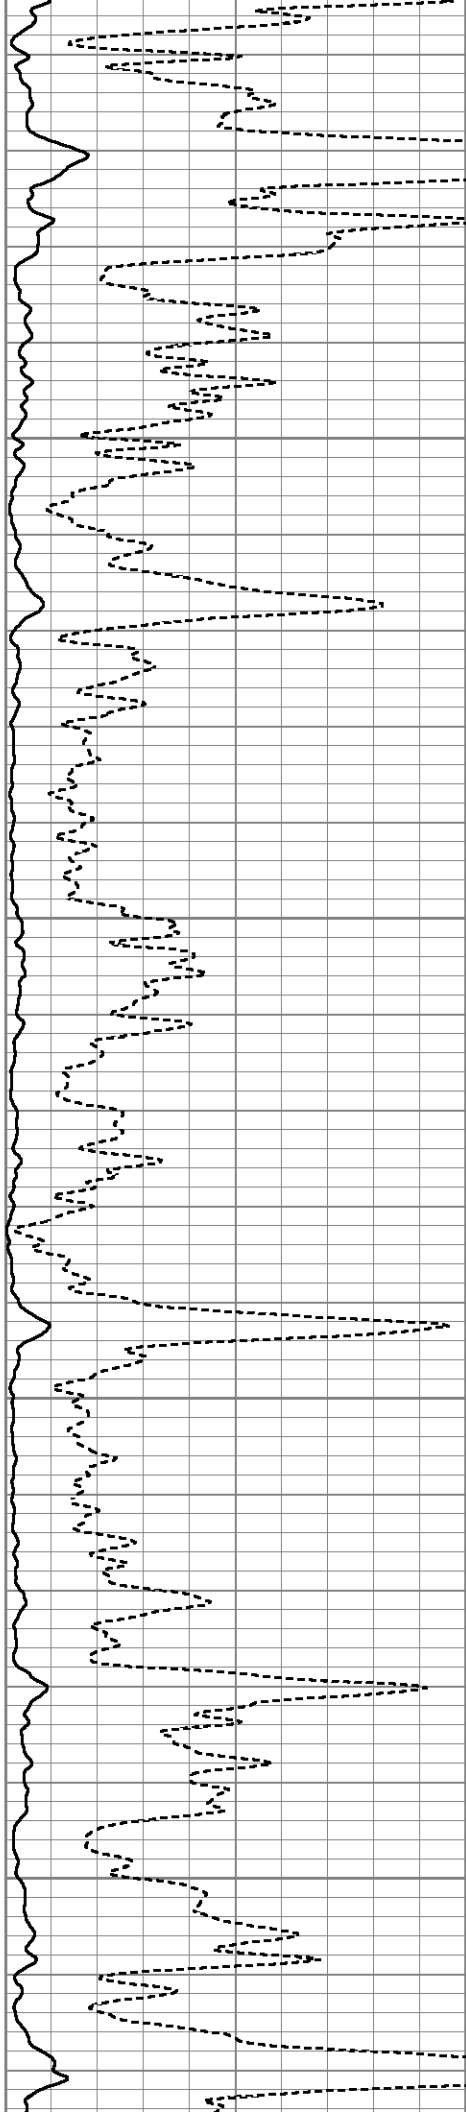


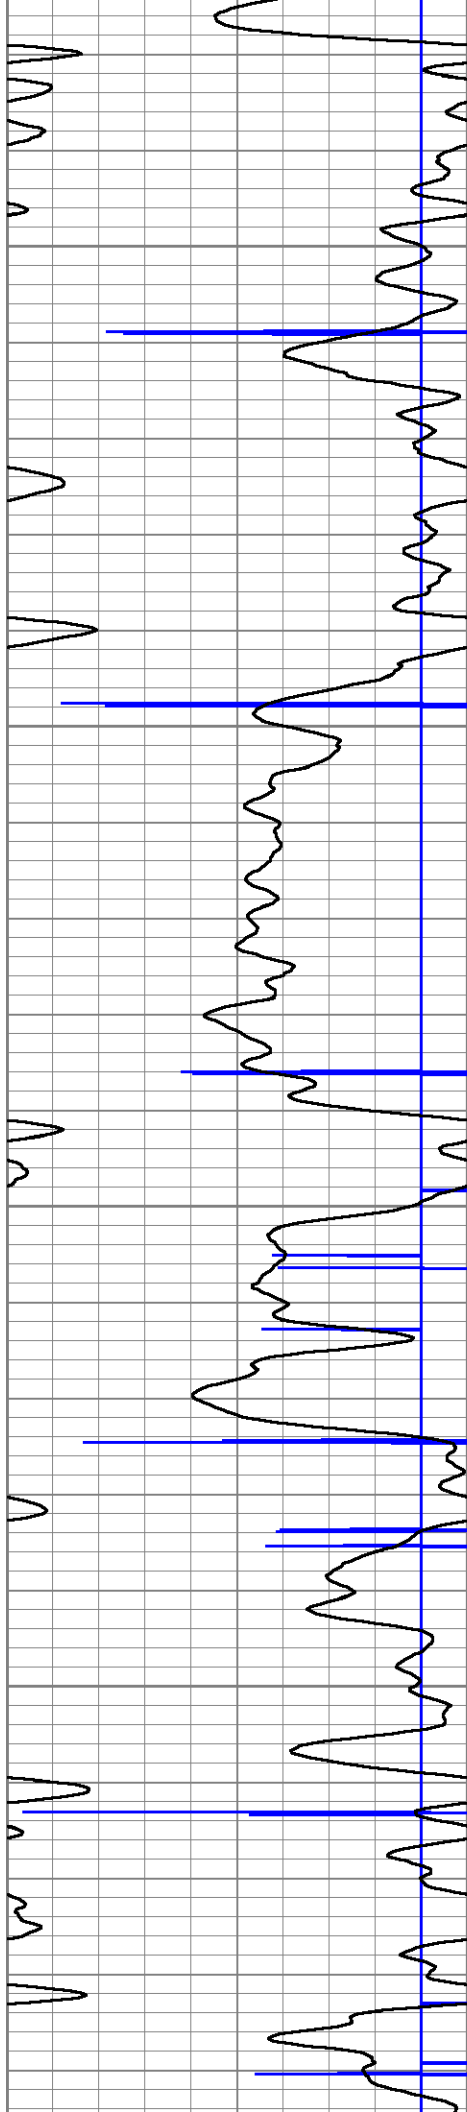



5800

5850

5900

5950

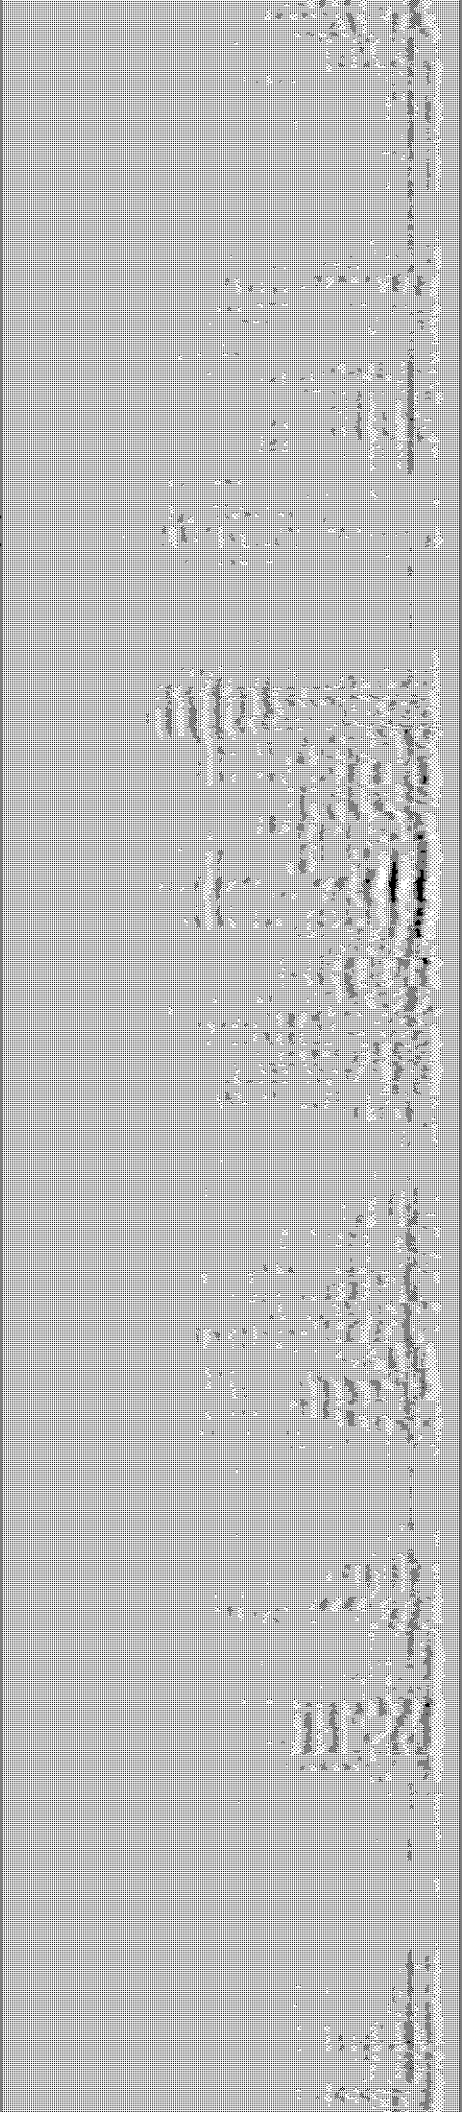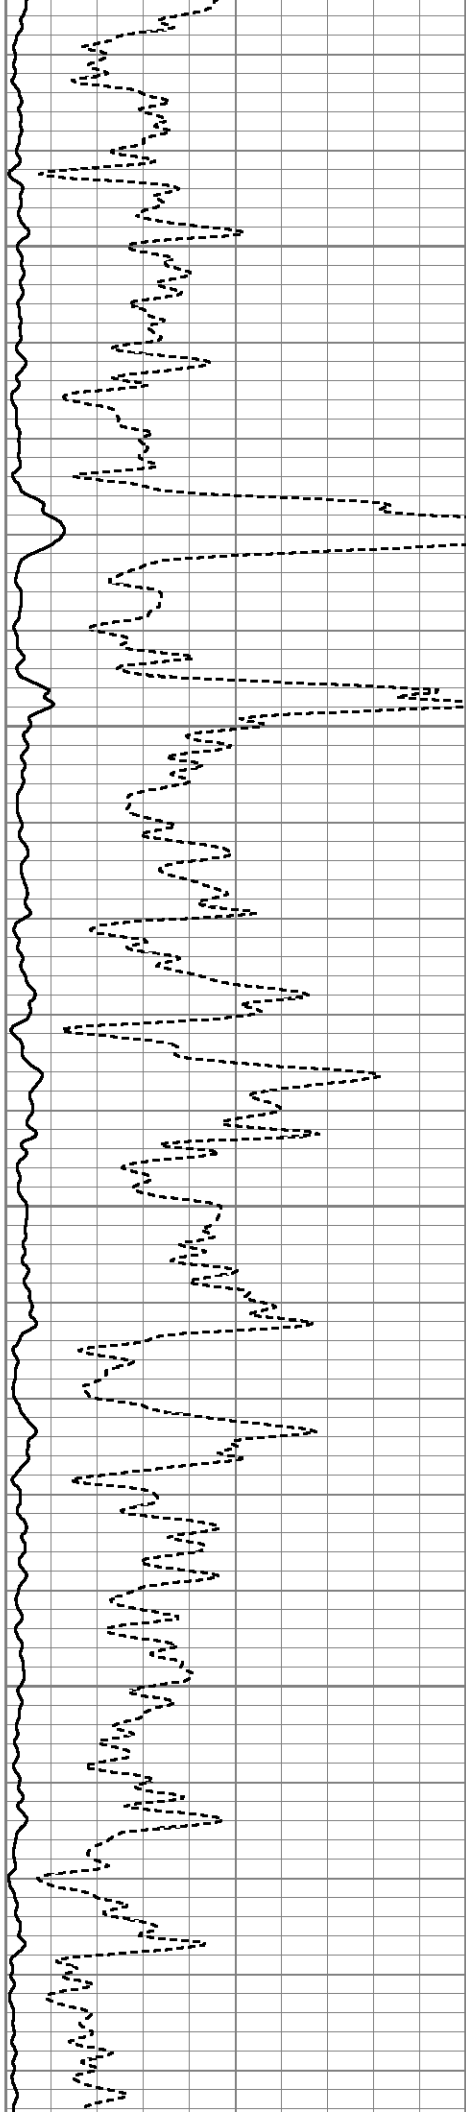

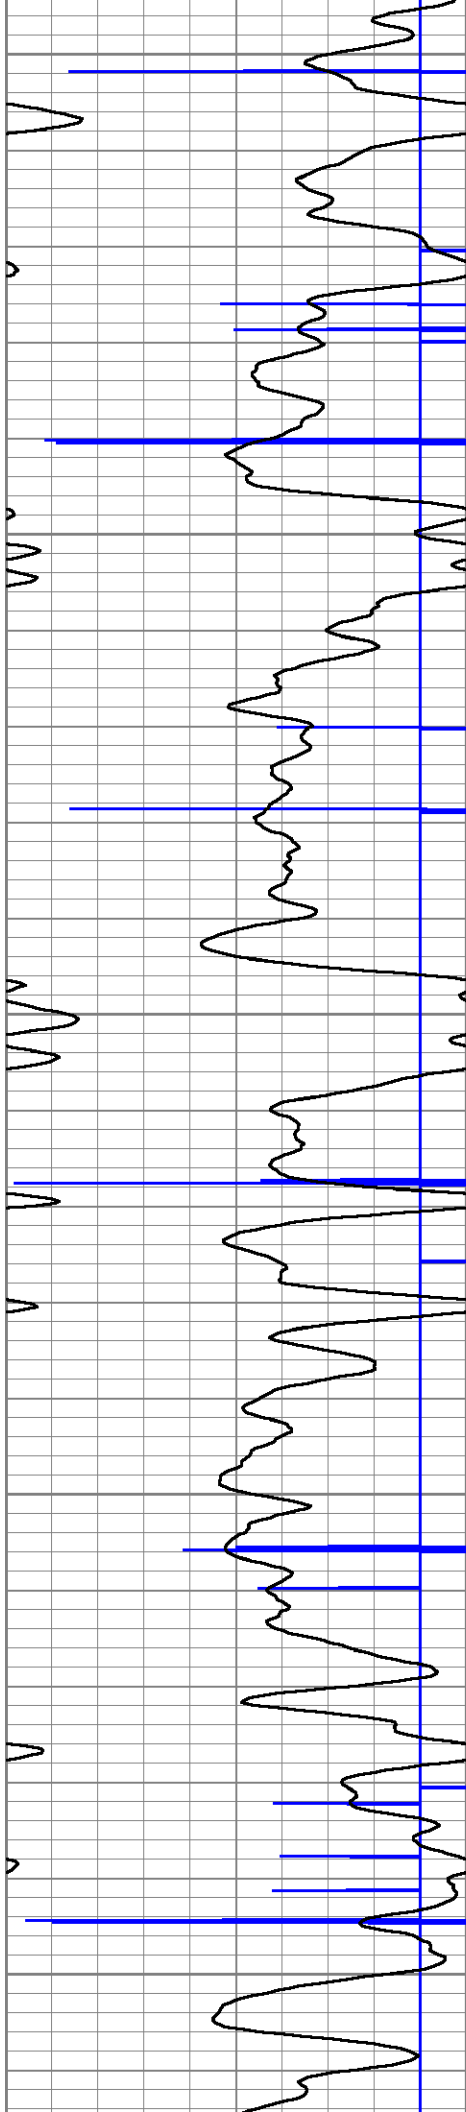



6000


6050

6100

6150

6200

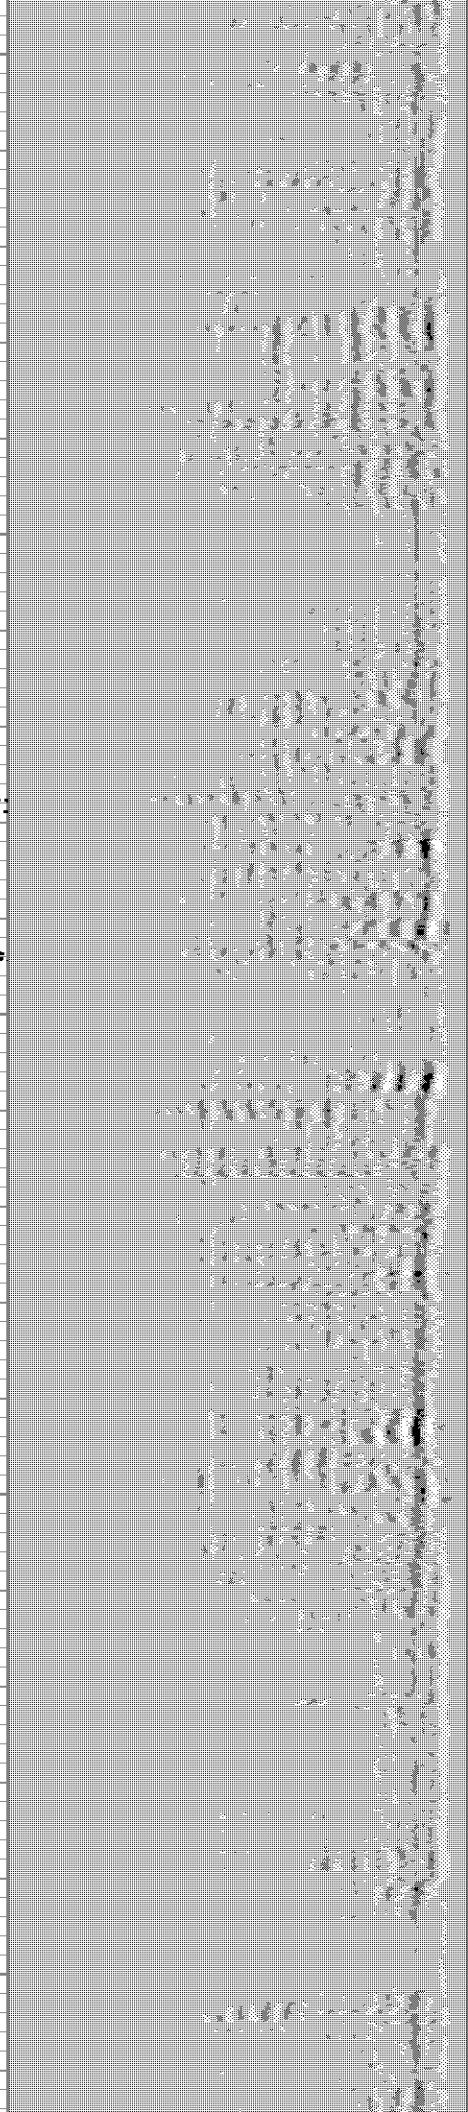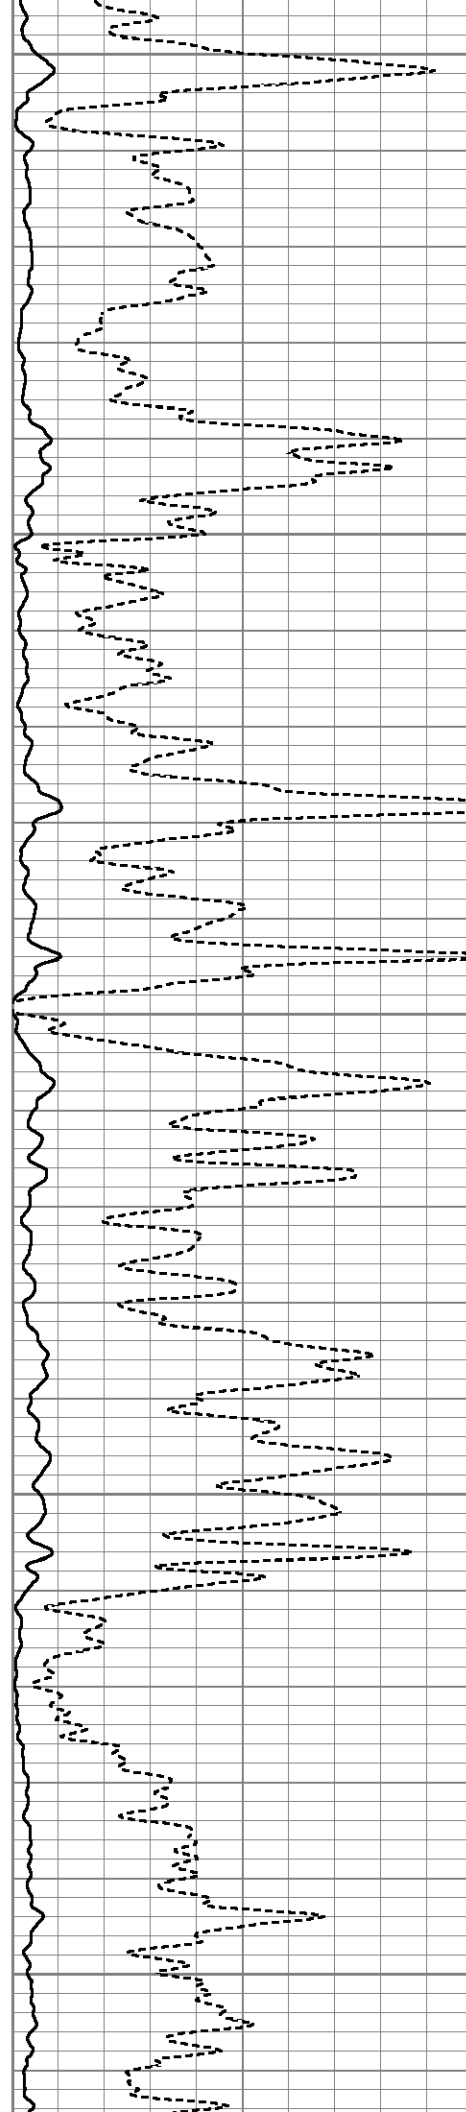


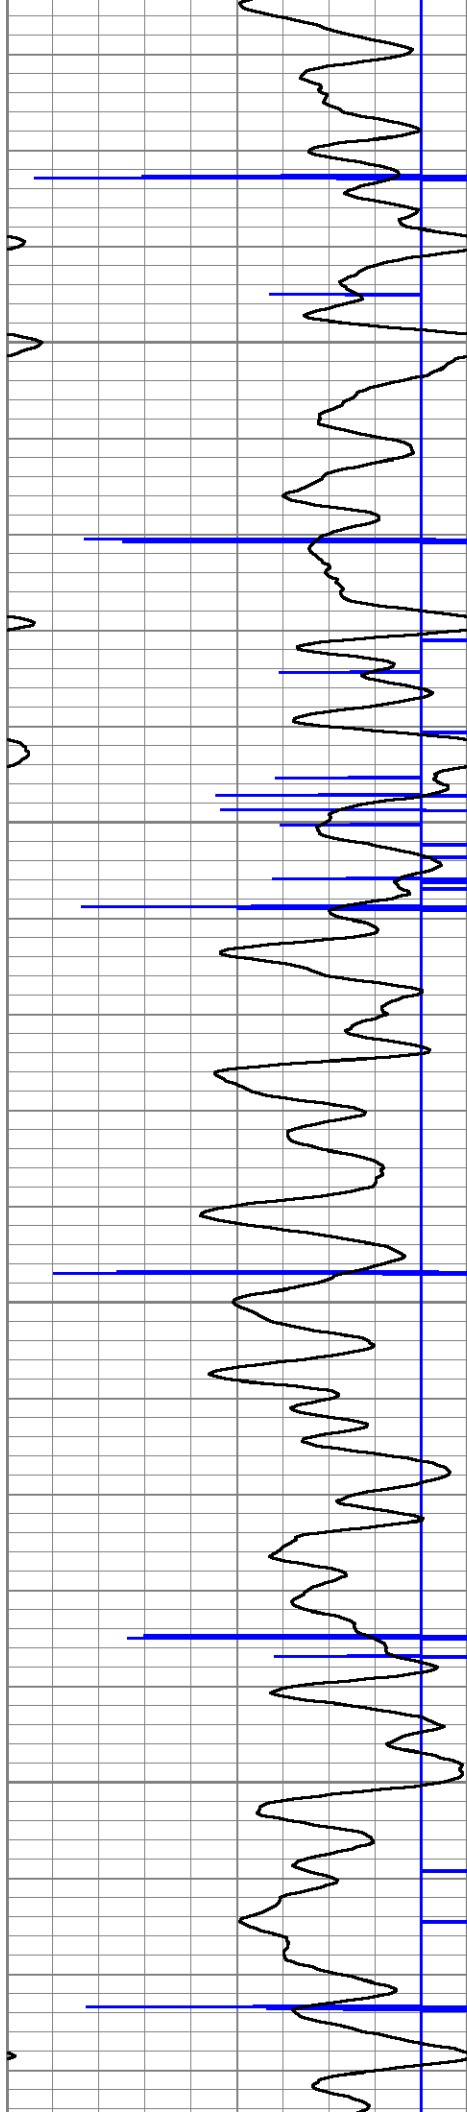



6250

6300

6350

6400

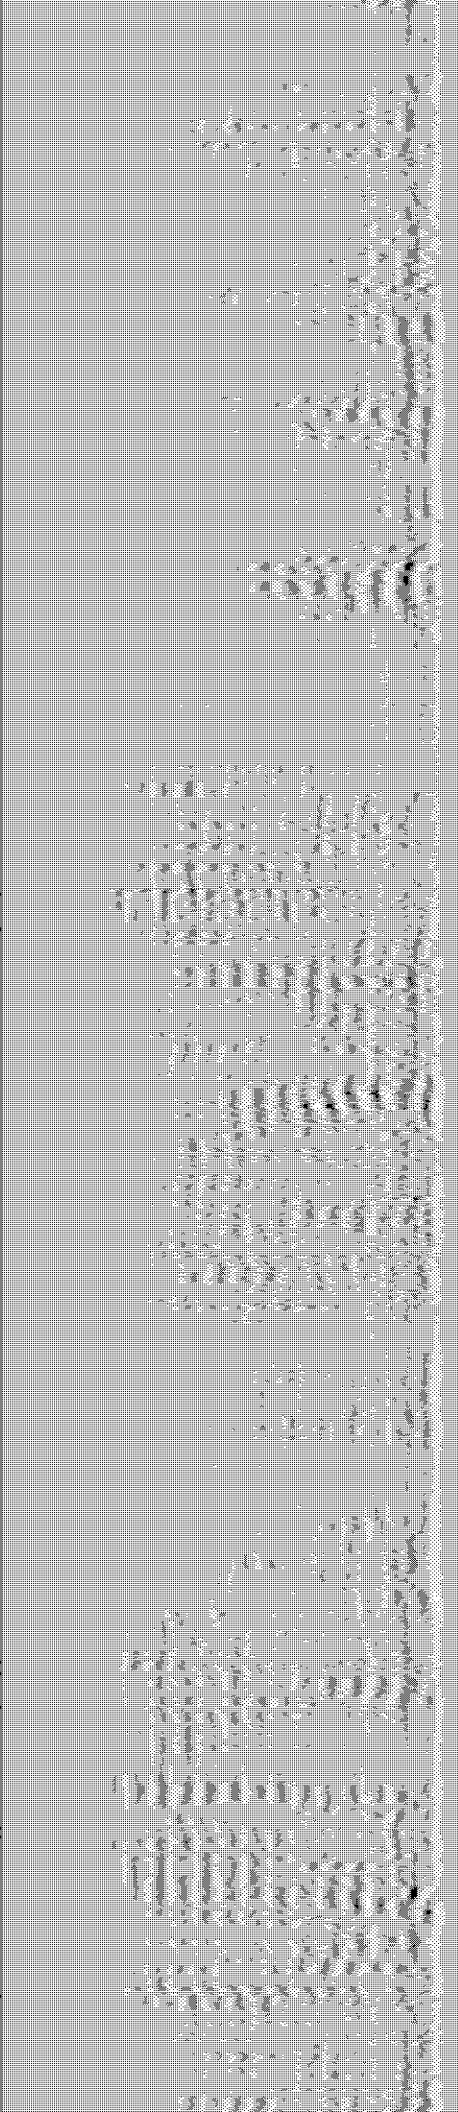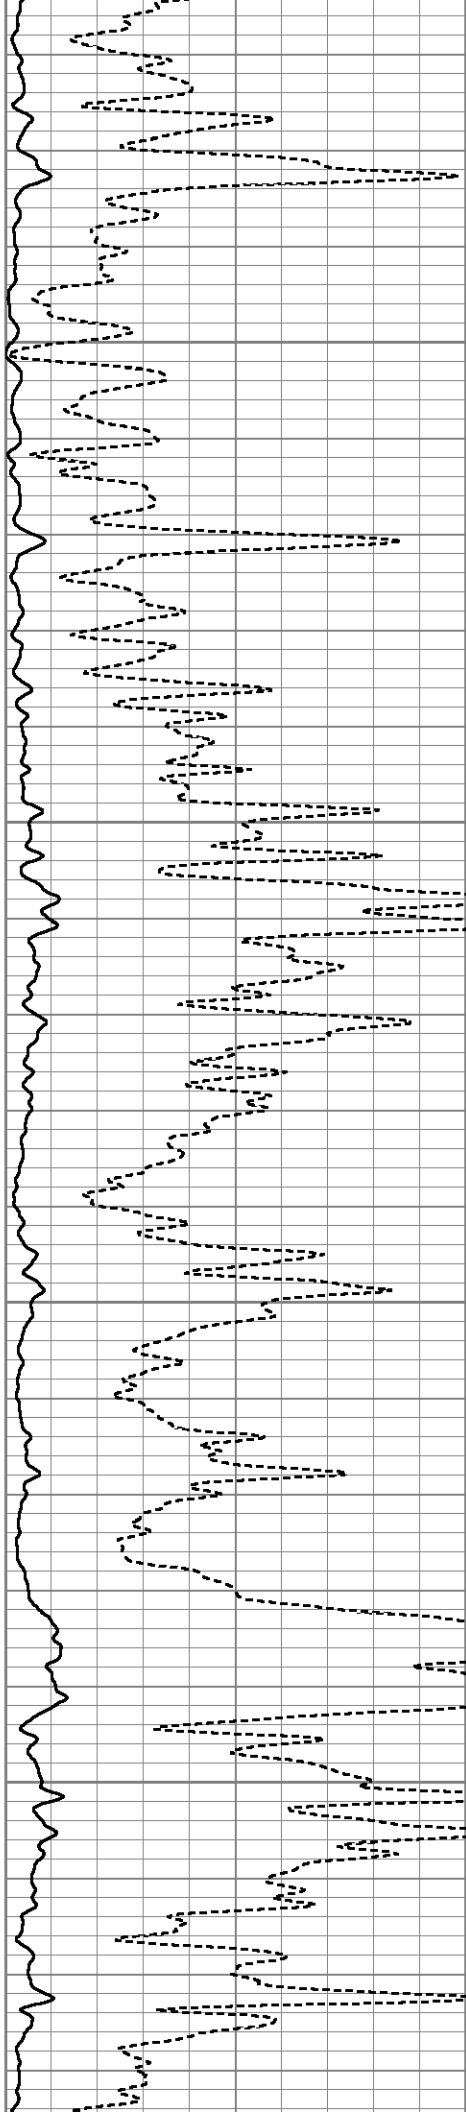

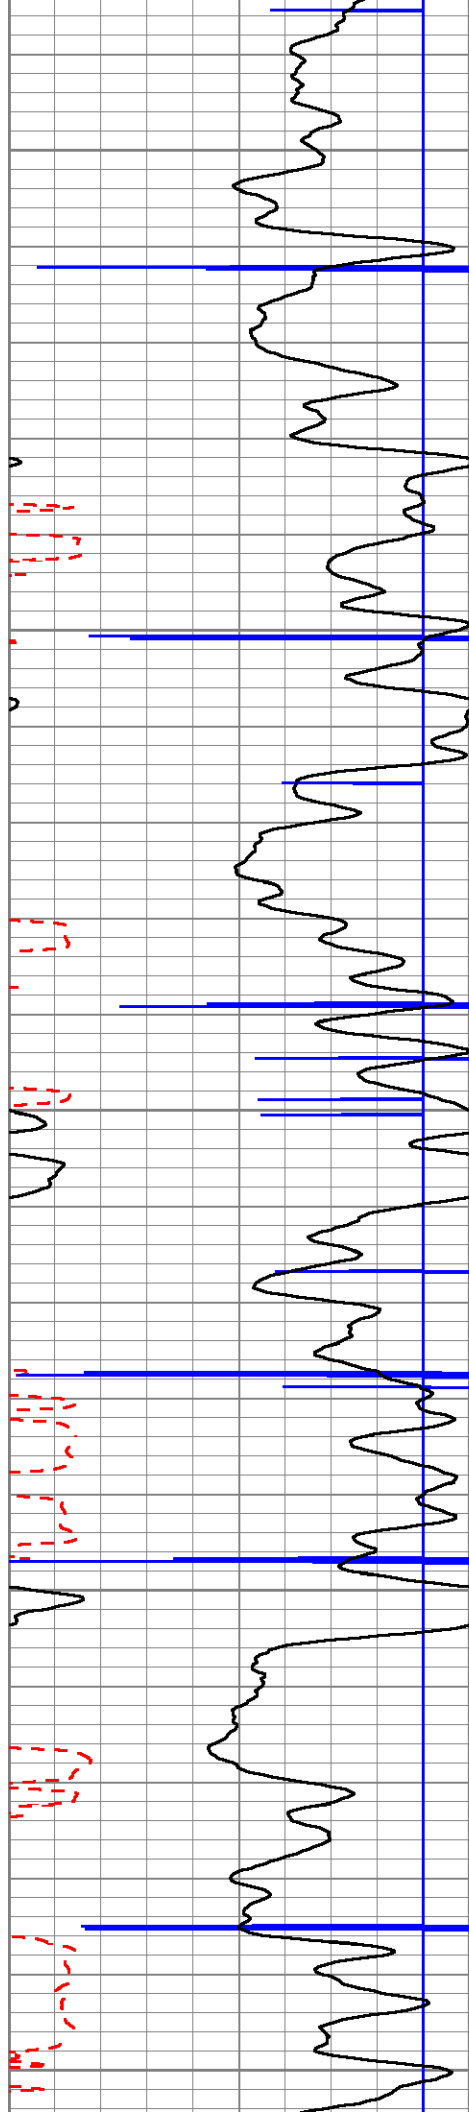



6450


6500

6550

6600

6650

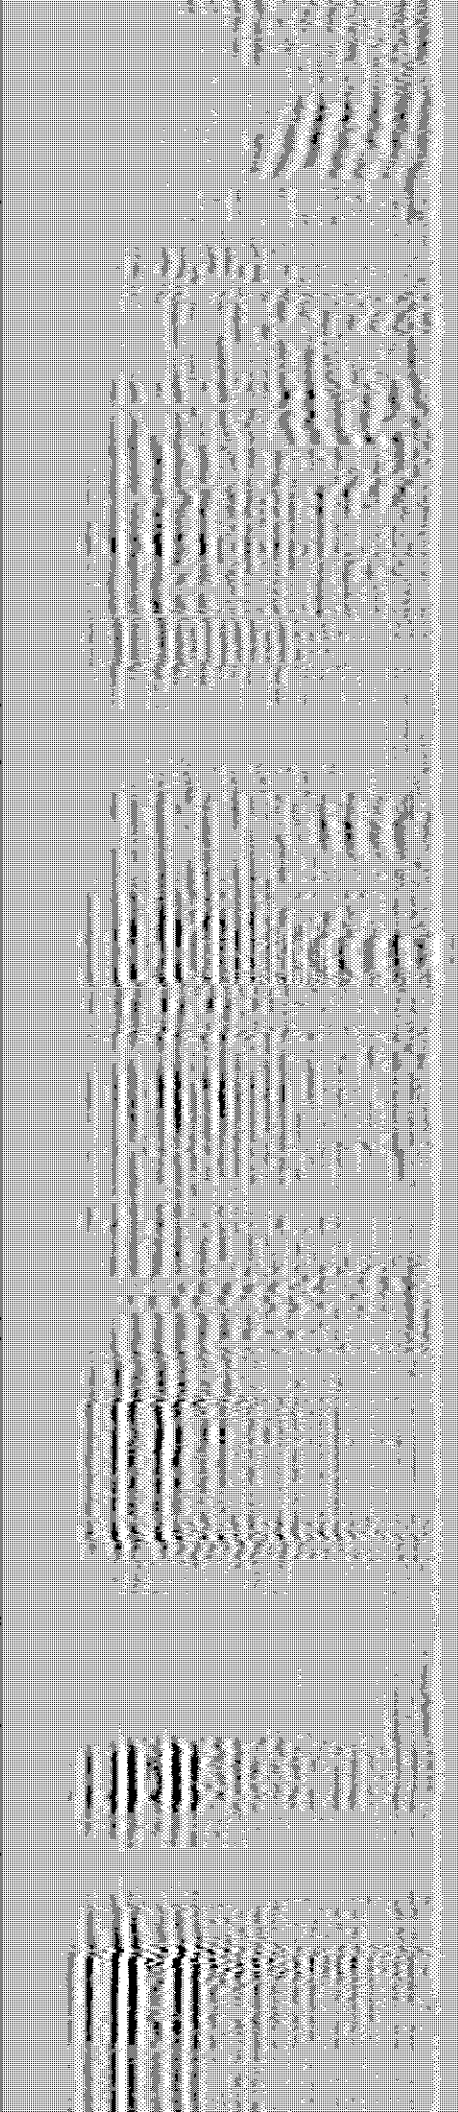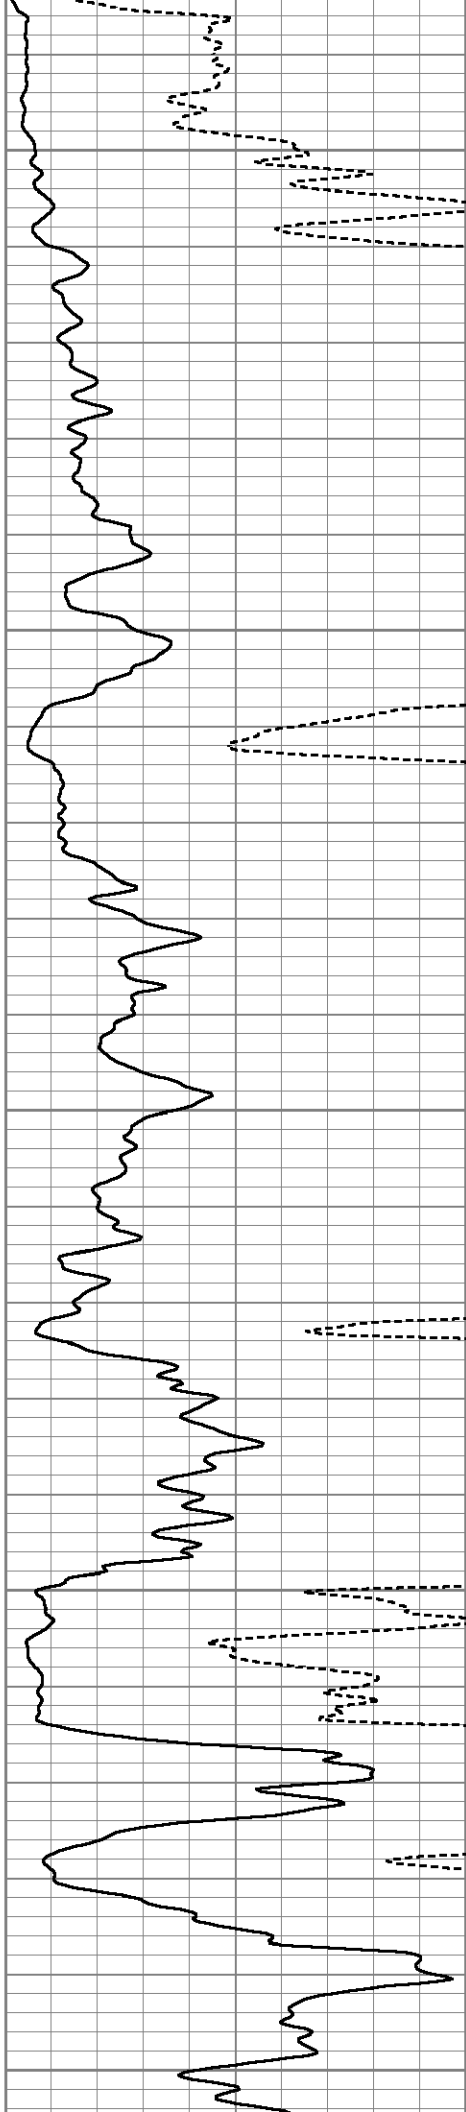


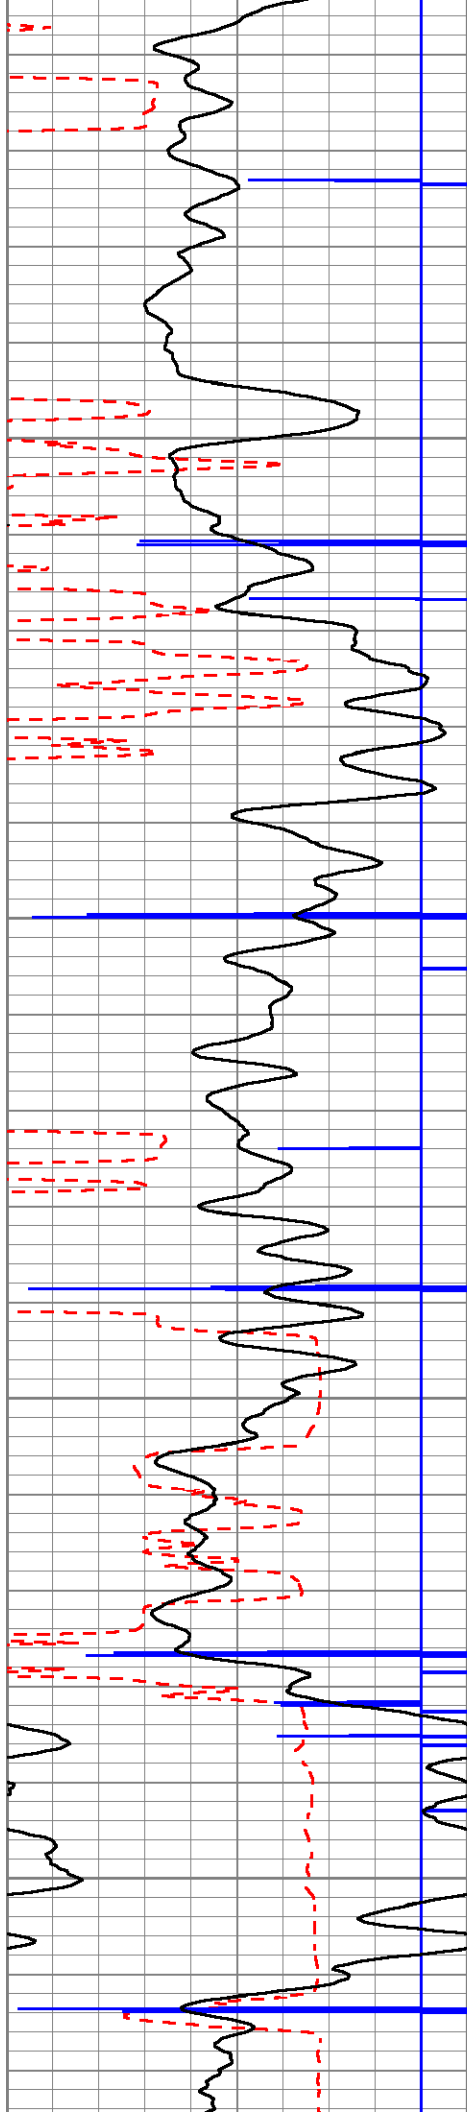



6700

6750

6800

6850

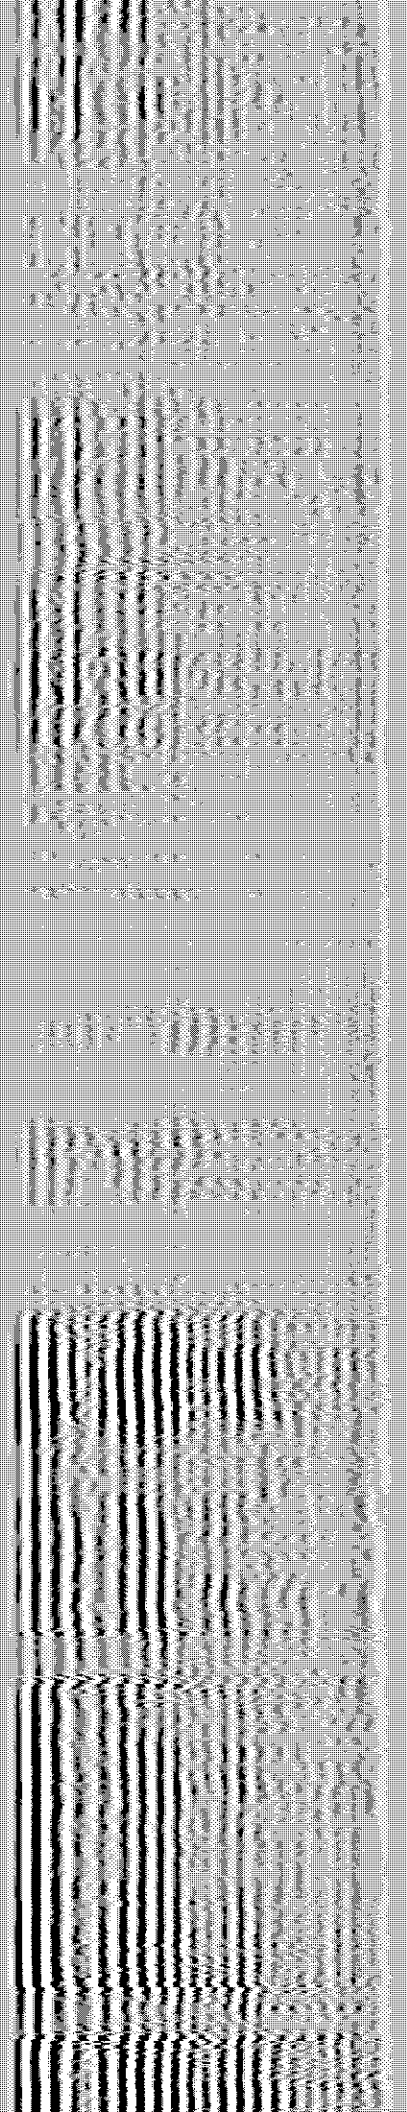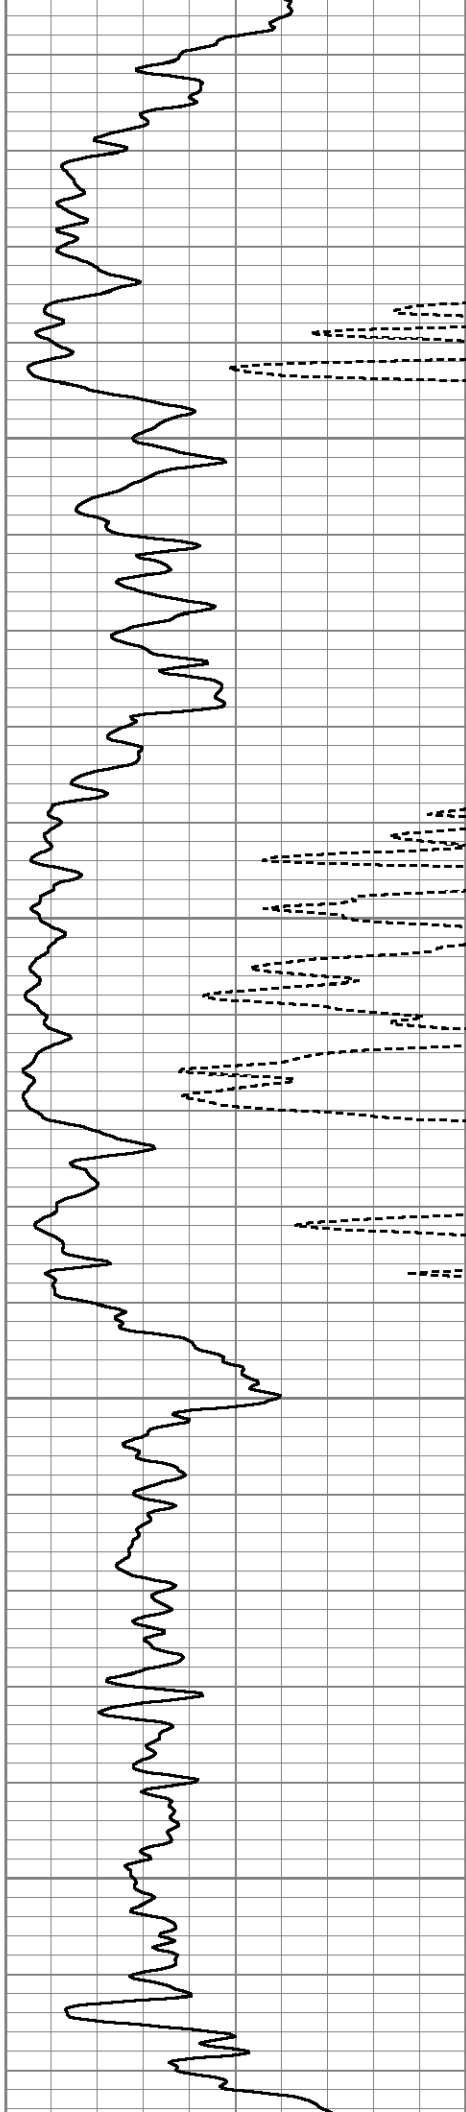


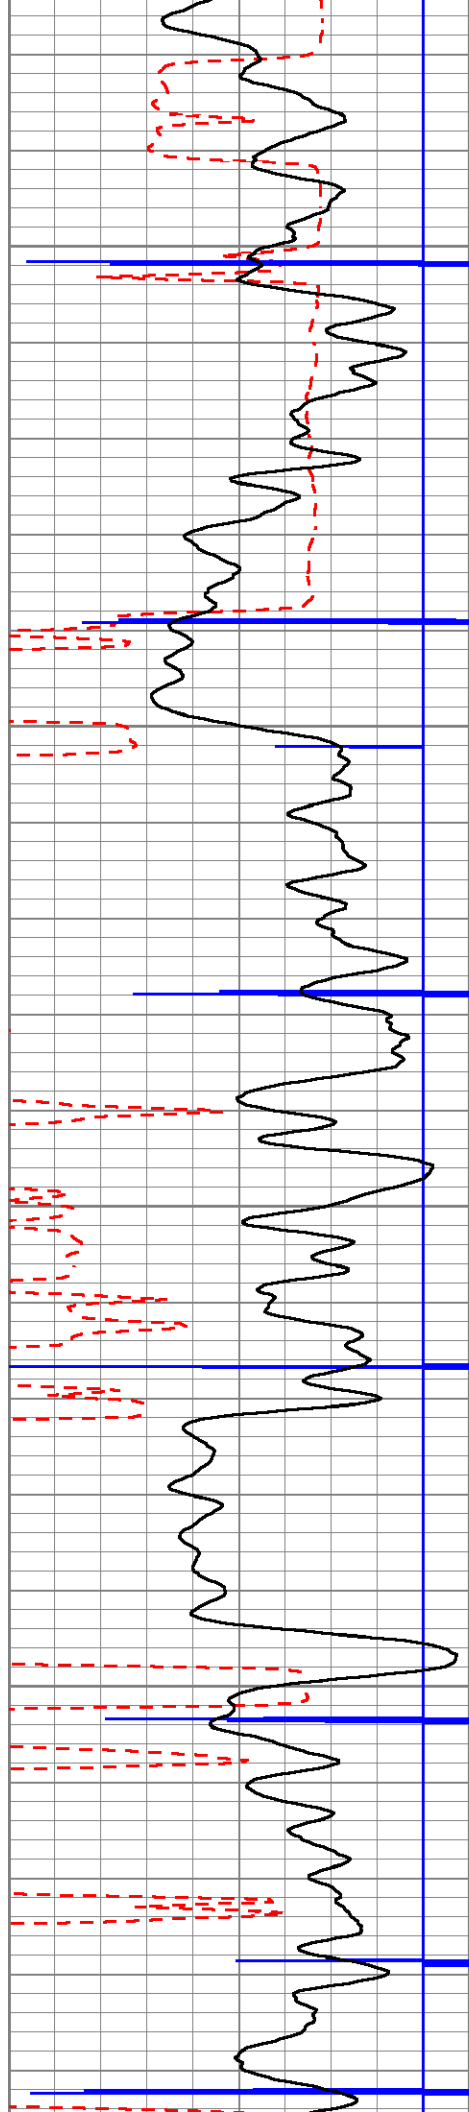



6900

6950

7000

7050

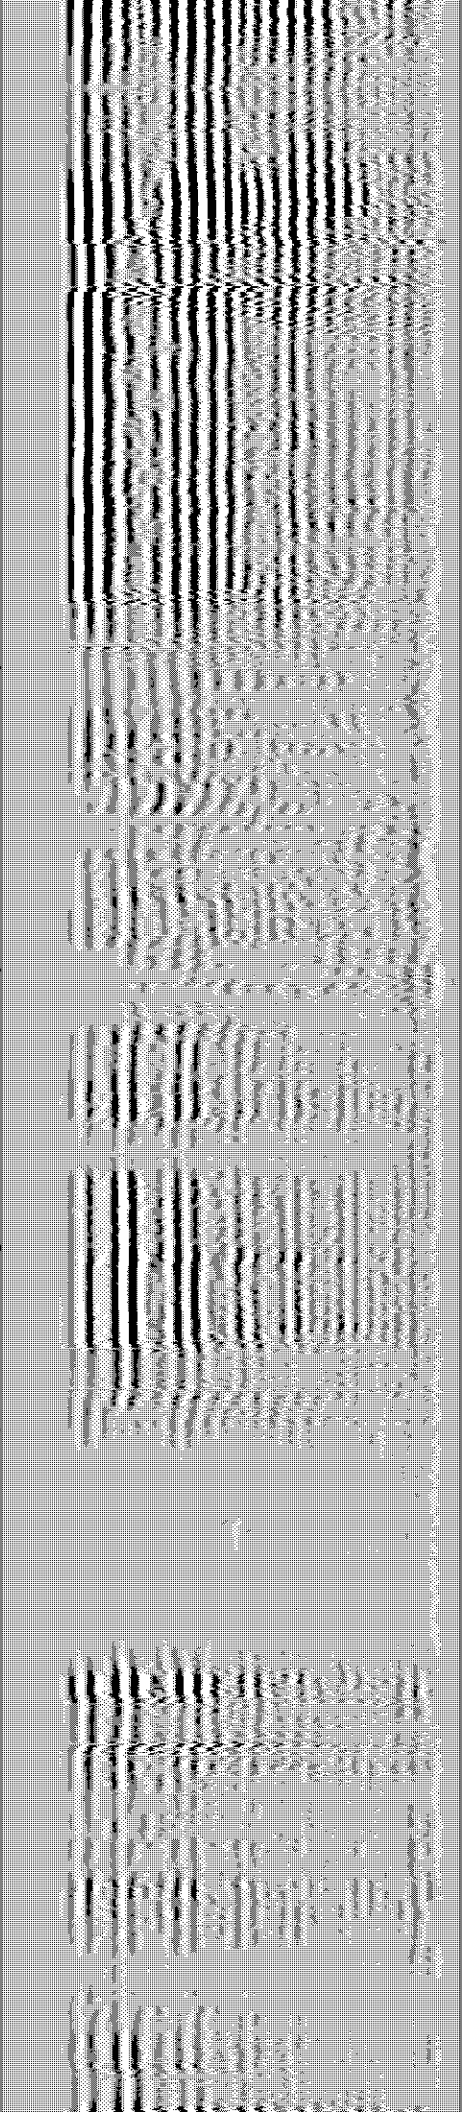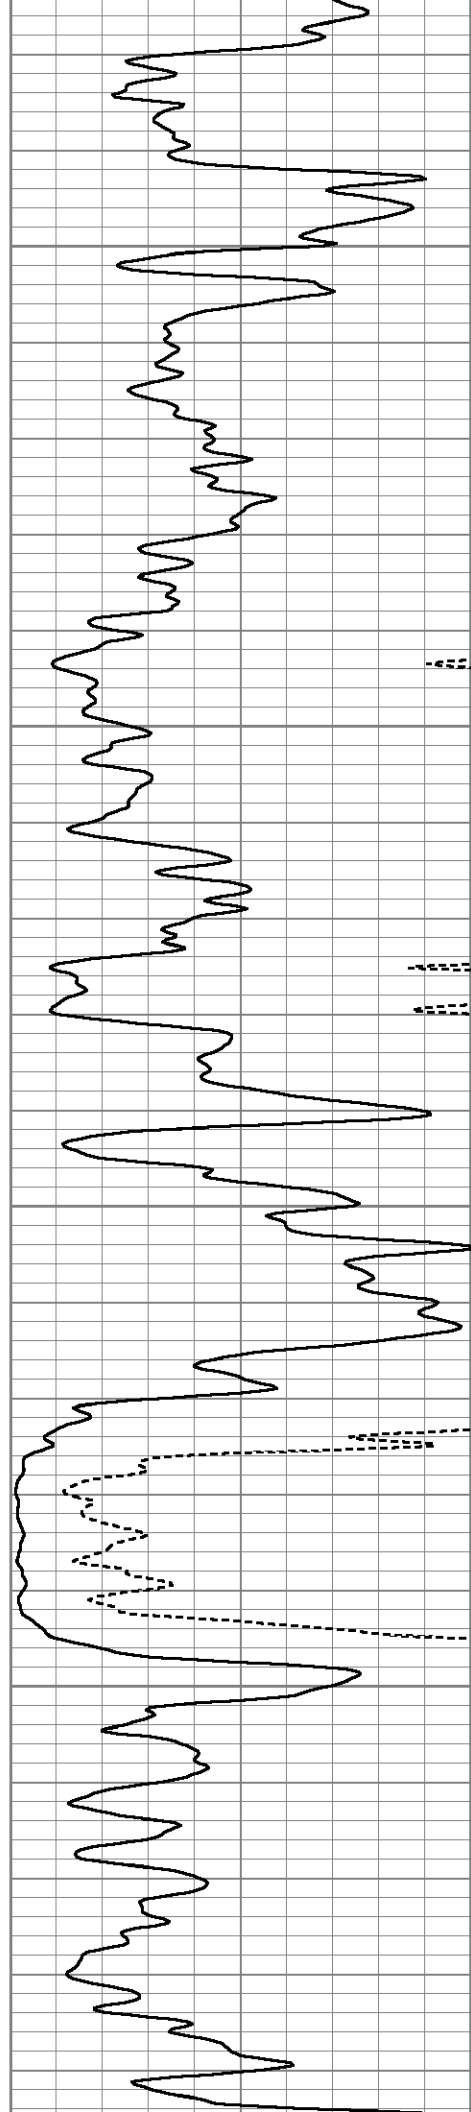

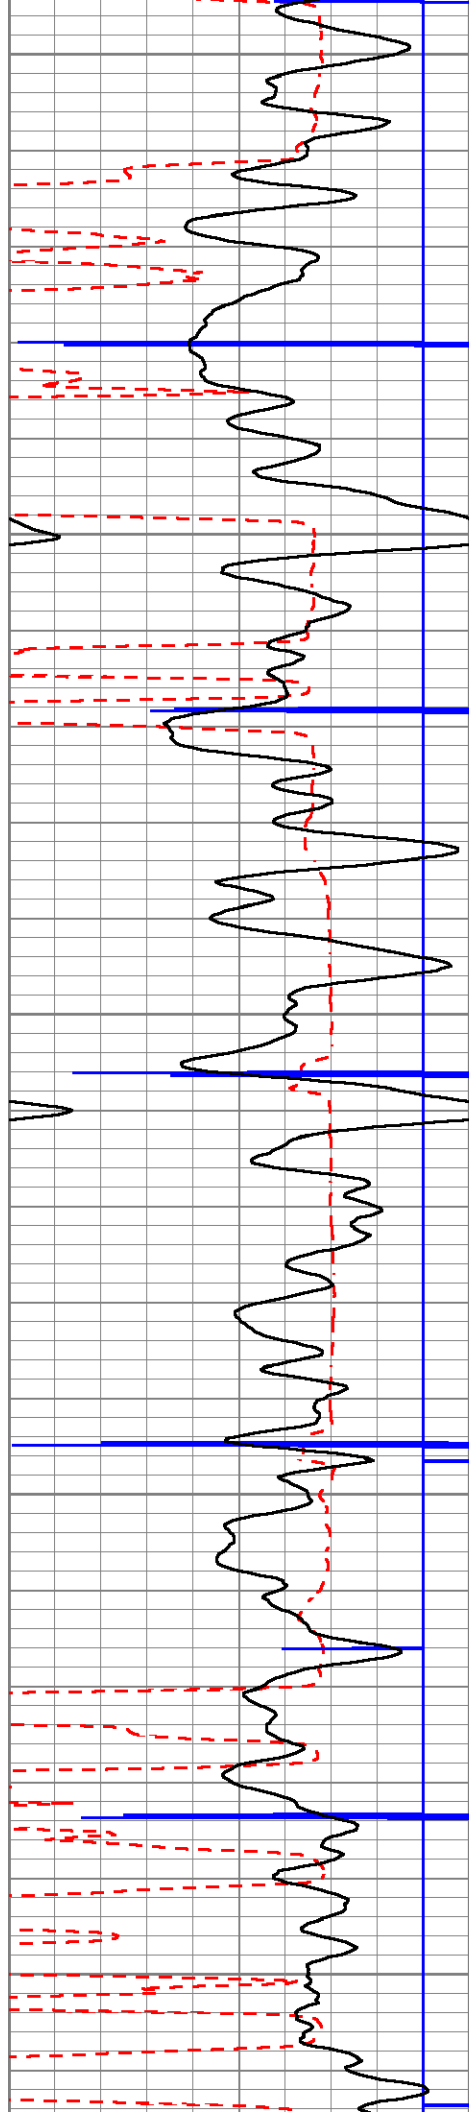



7100


7150

7200

7250

7300

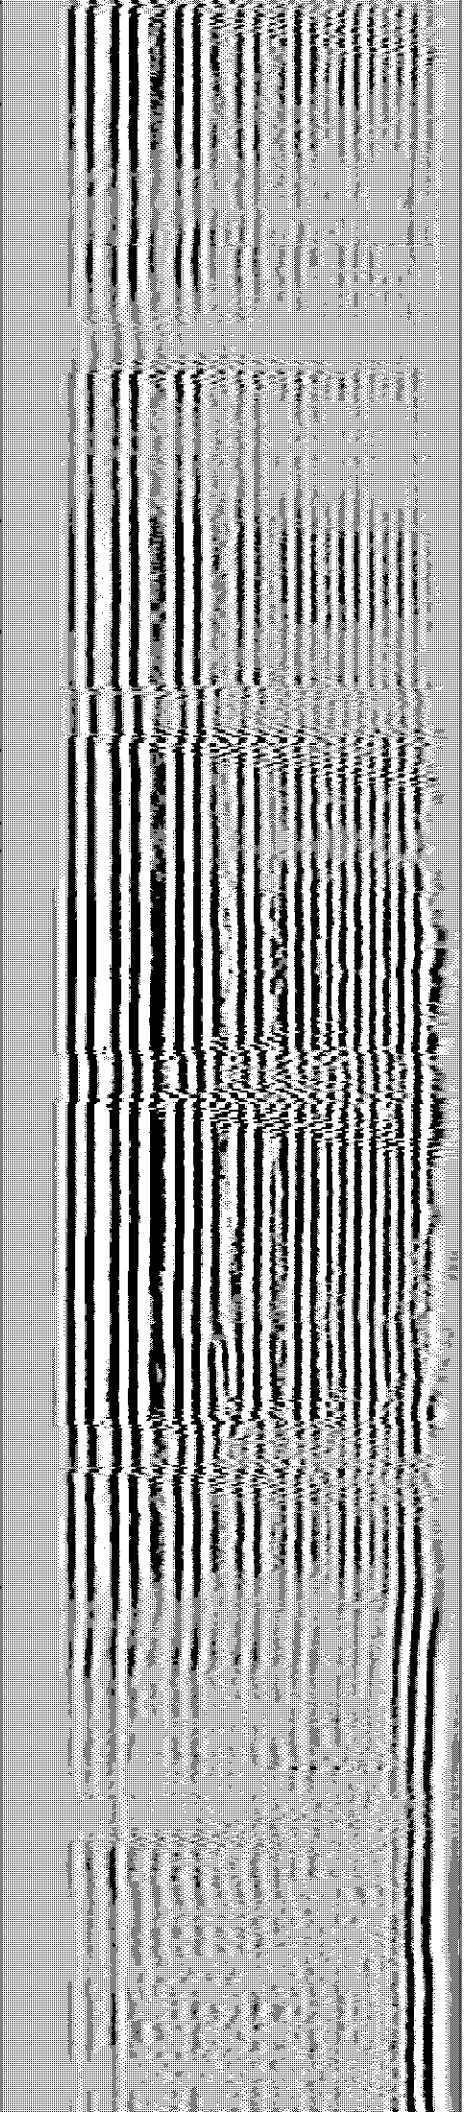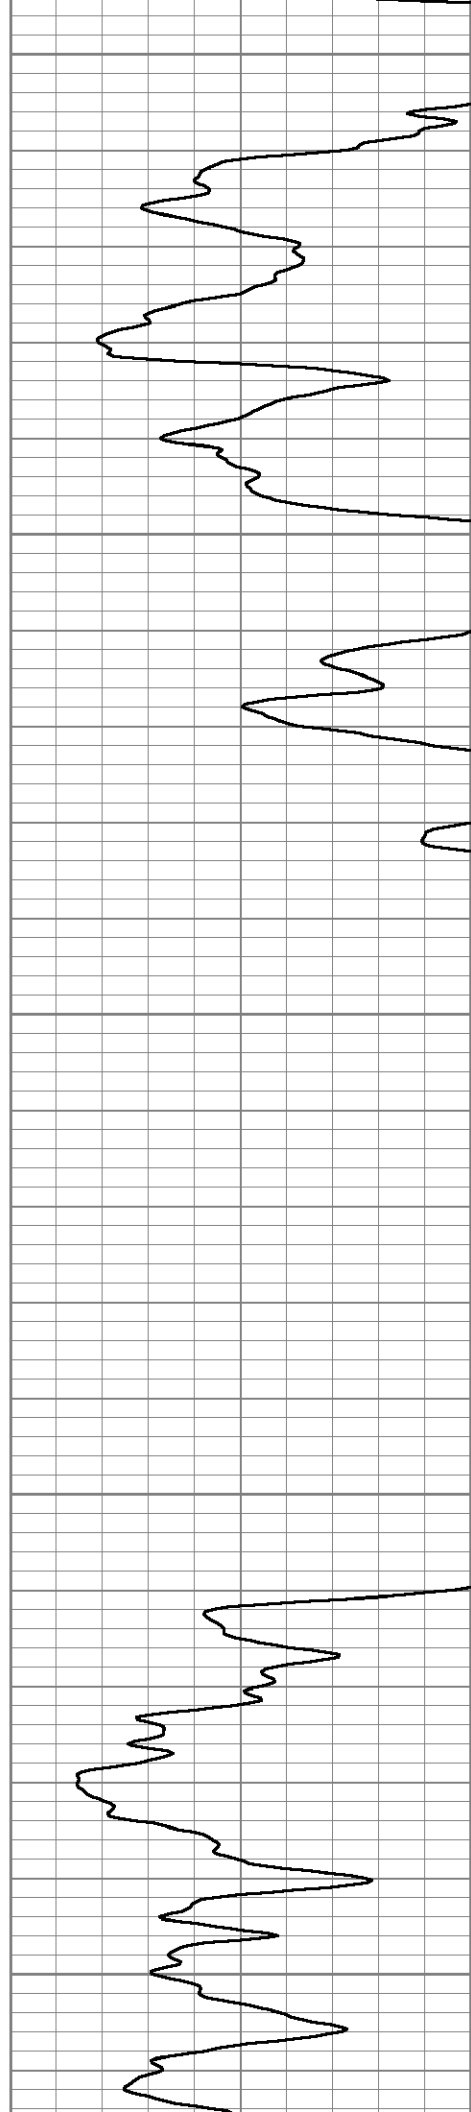


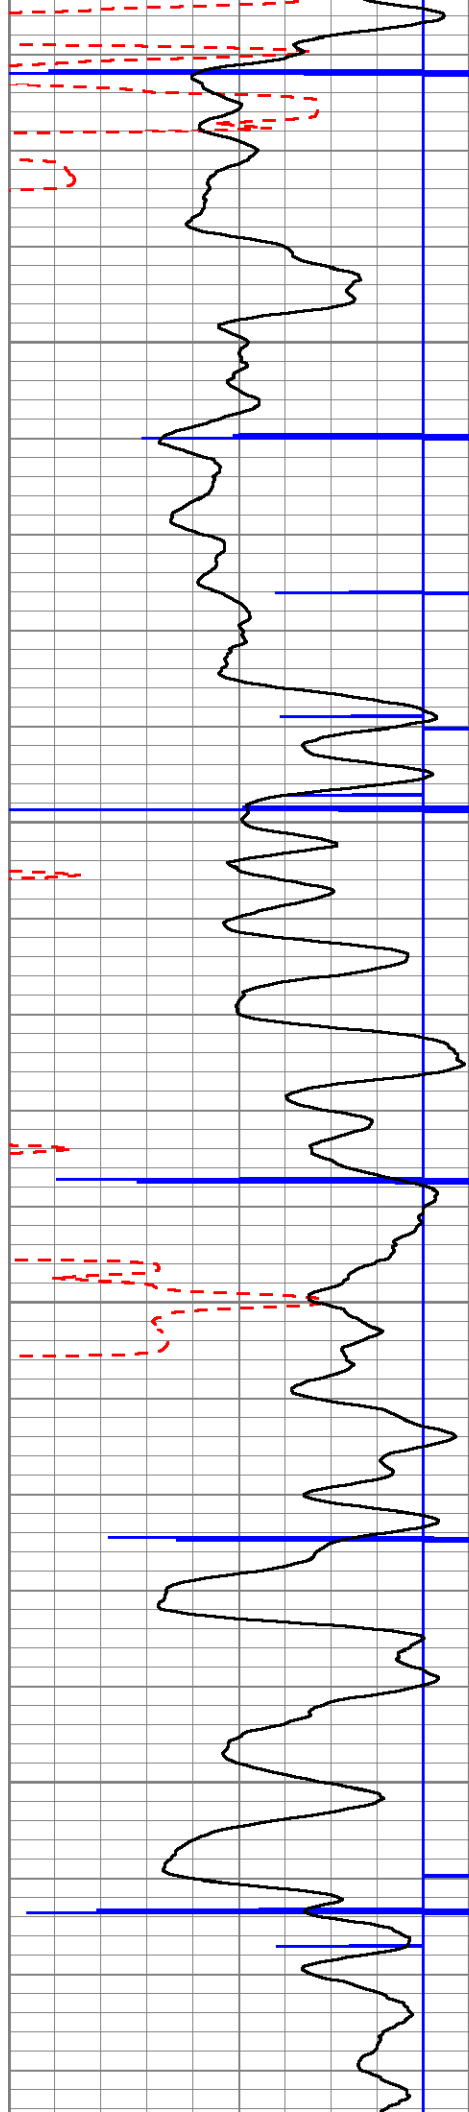



7350

7400

7450

7500

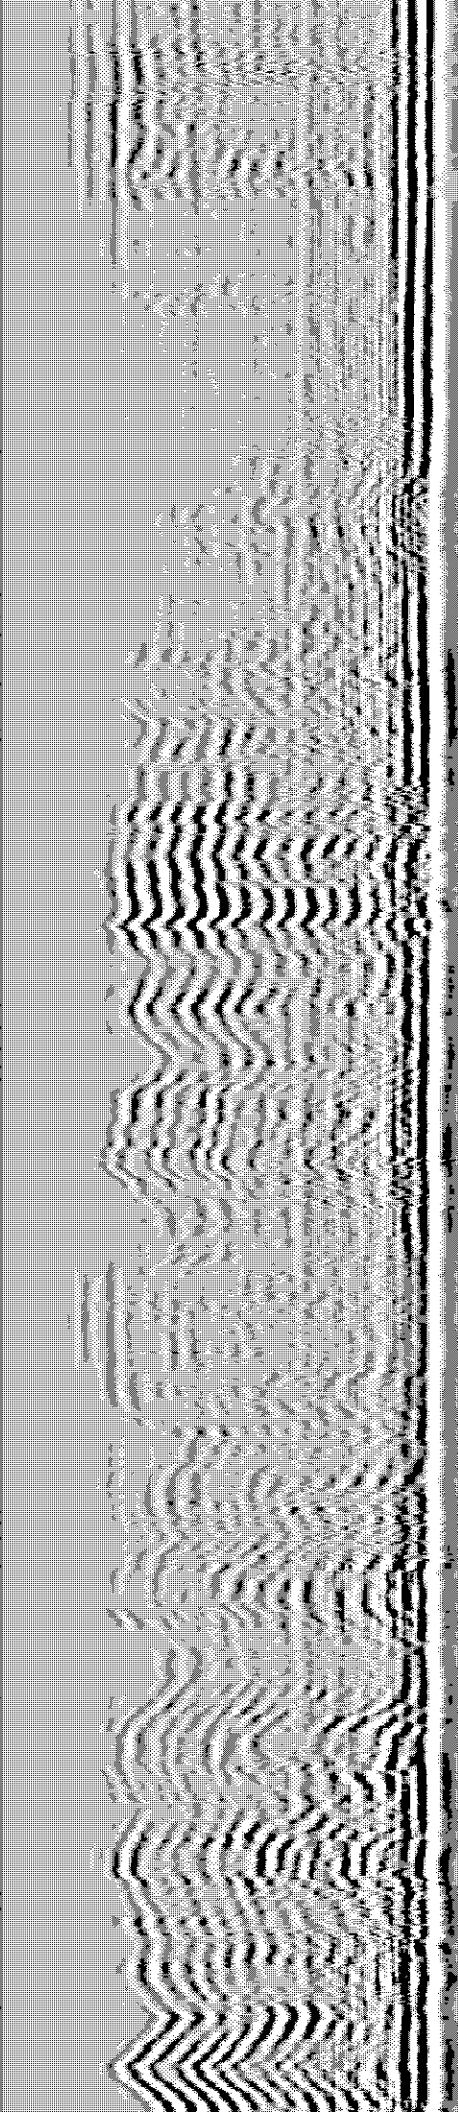
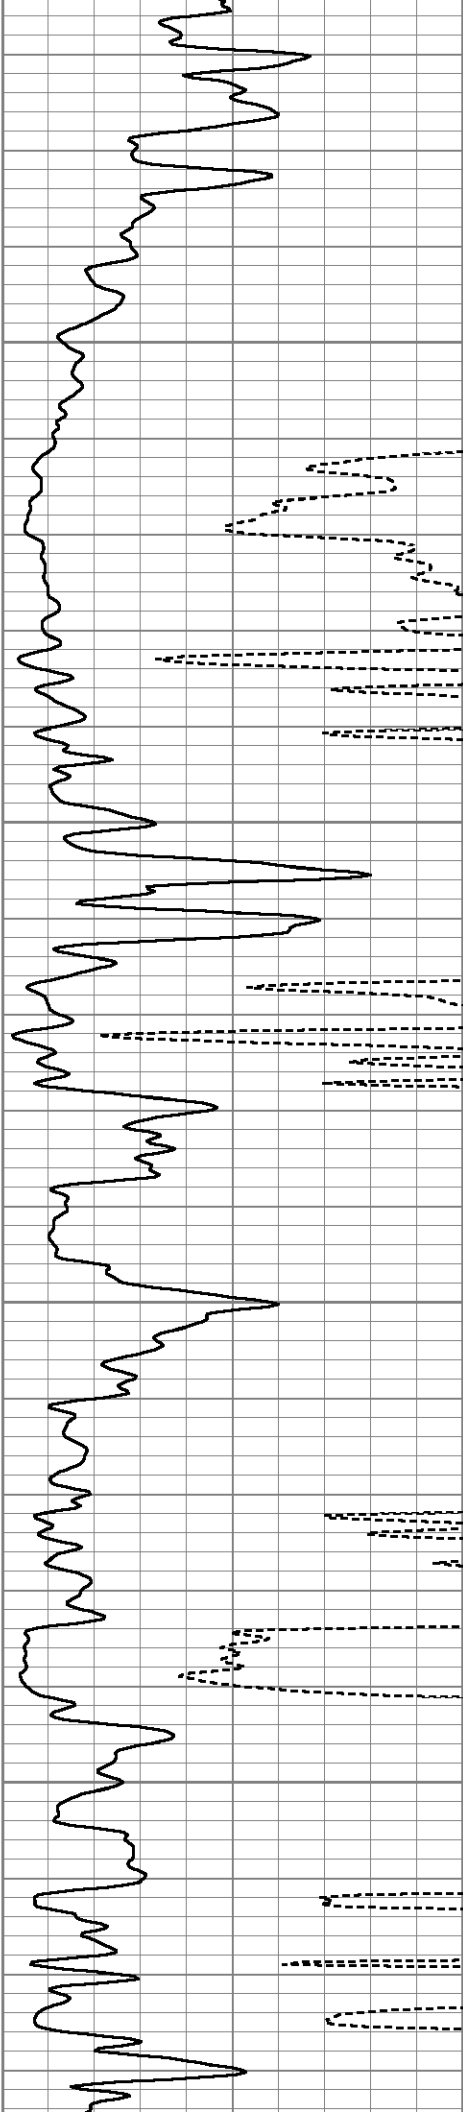


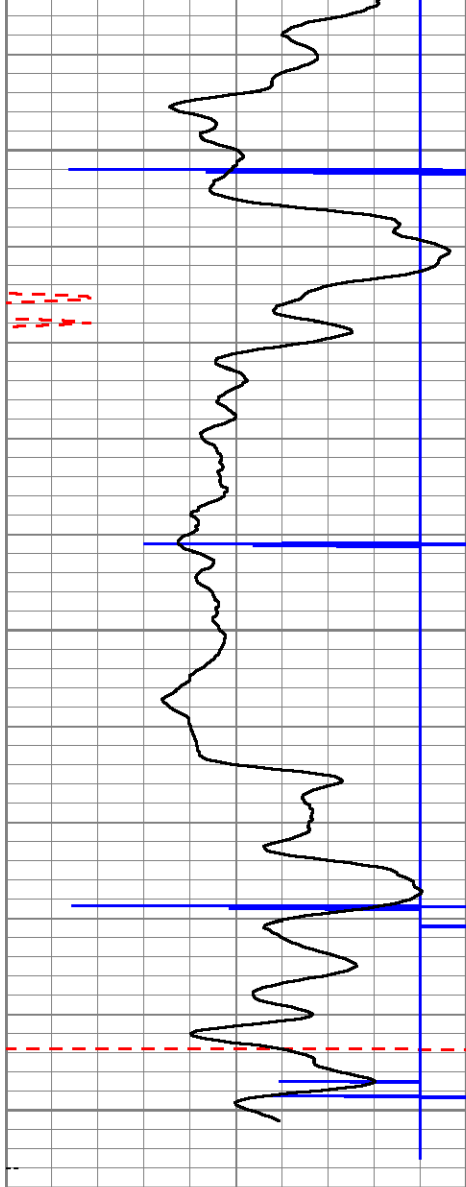

7550

7600

7650

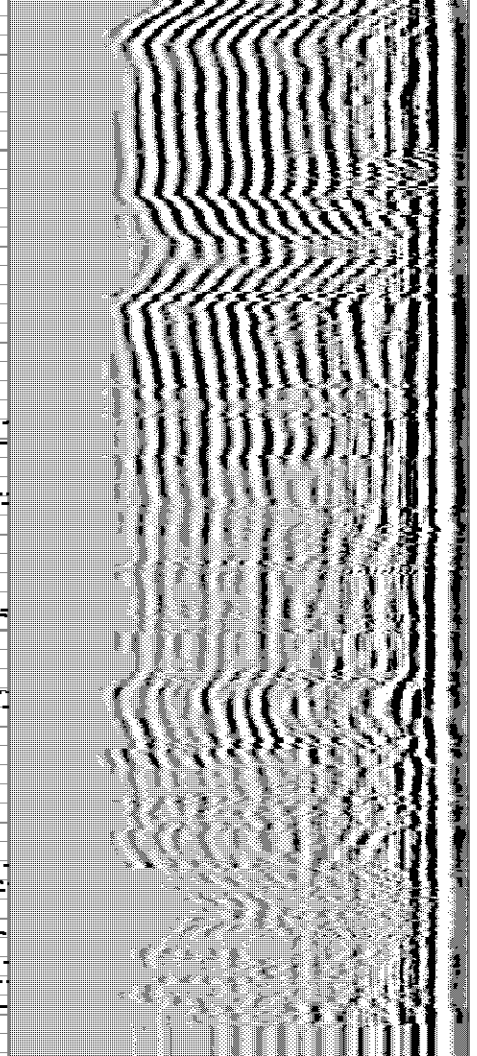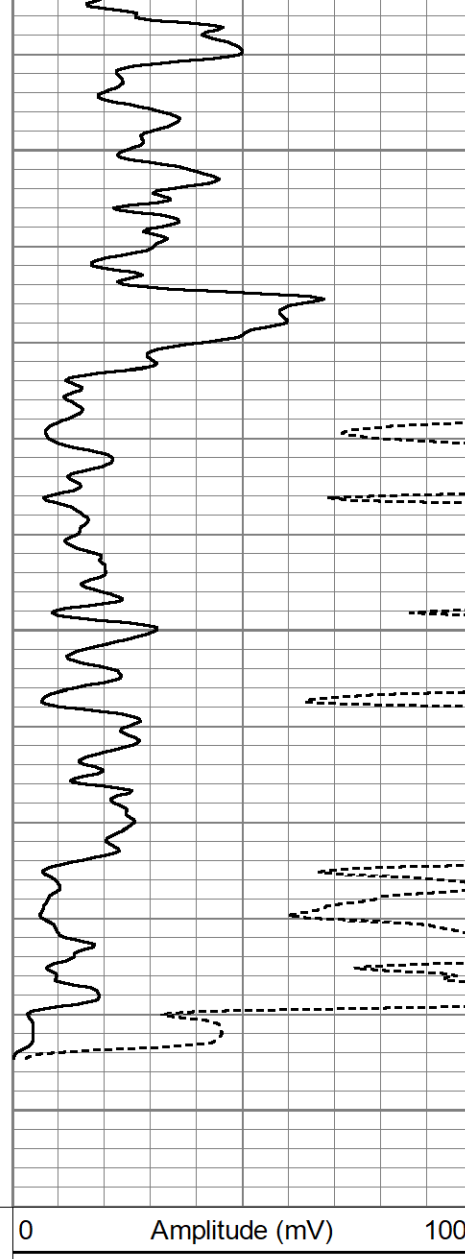

300	TT3FT (usec)	200
-9	Collar Locator	1
0	Gamma Ray	150
0	Line Speed (ft/min)	100

0 Amplitude (mV) 100 200

200 VDL 1200