

MALLARD EXPLORATION

WELD COUNTY, COLORADO (NAD 83)

NE NW SEC. 21 T8N R60W 6th P.M.

GOLDENEYE FED 21-4HN

ORIGINAL WELLBORE

11 July, 2019

Plan: PROPOSAL #2









Project: WELD COUNTY, COLORADO (NAD 83)
Site: NE NW SEC. 21 T8N R60W 6th P.M.
Well: GOLDENEYE FED 21-4HN
Wellbore: ORIGINAL WELLBORE
Design: PROPOSAL #2

ANNOTATIONS										
TVD	MD	Inc	Azi	+N/-S	+E/-W	VSect	Dep	Annotation		
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL: 559ft FNL & 2232ft FWL of Sec 21		
500.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	START NUDGE (2°/100ft BUR)		
1118.31	1123.21	12.46	33.56	56.26	37.33	-52.21	67.52	EOB TO 12.46° INC		
5033.73	5133.15	12.46	33.56	777.46	515.77	-721.50	932.98	END OF TANGENT		
5652.04	5756.36	0.00	0.00	833.72	553.10	-773.71	1000.50	EOD TO VERTICAL		
5752.04	5856.36	0.00	0.00	833.72	553.10	-773.71	1000.50	KOP (10°/100ft BUR)		
6325.00	6756.36	90.00	181.12	260.87	541.90	-204.91	1573.46	LP: 300ft FNL & 2525ft FEL of Sec 21		
6325.00	11457.81	90.00	181.12	-4439.67	449.87	4462.41	6274.91	BHL: 300ft FSL & 2525ft FEL of Sec 21		

PROPOSED LOCAL COORDINATES:

SHL: 559ft FNL & 2232ft FWL Sec 21
HZ LP: 300ft FNL & 2525ft FEL Sec 21
BHL: 300ft FSL & 2525ft FEL of Sec 21

WELLBORE TARGET DETAILS (LAT/LONG)					
Name	TVD	+N/-S	+E/-W	Latitude	Longitude
KOP - GOLDENEYE FED 21-4HN (P2)	5752.04	833.72	553.10	40.655836	-104.095925
HZ LP - GOLDENEYE FED 21-4HN (P2)	6325.00	260.87	541.90	40.654264	-104.095965
BHL - GOLDENEYE FED 21-4HN (P2)	6325.00	-4439.67	449.87	40.641362	-104.096297

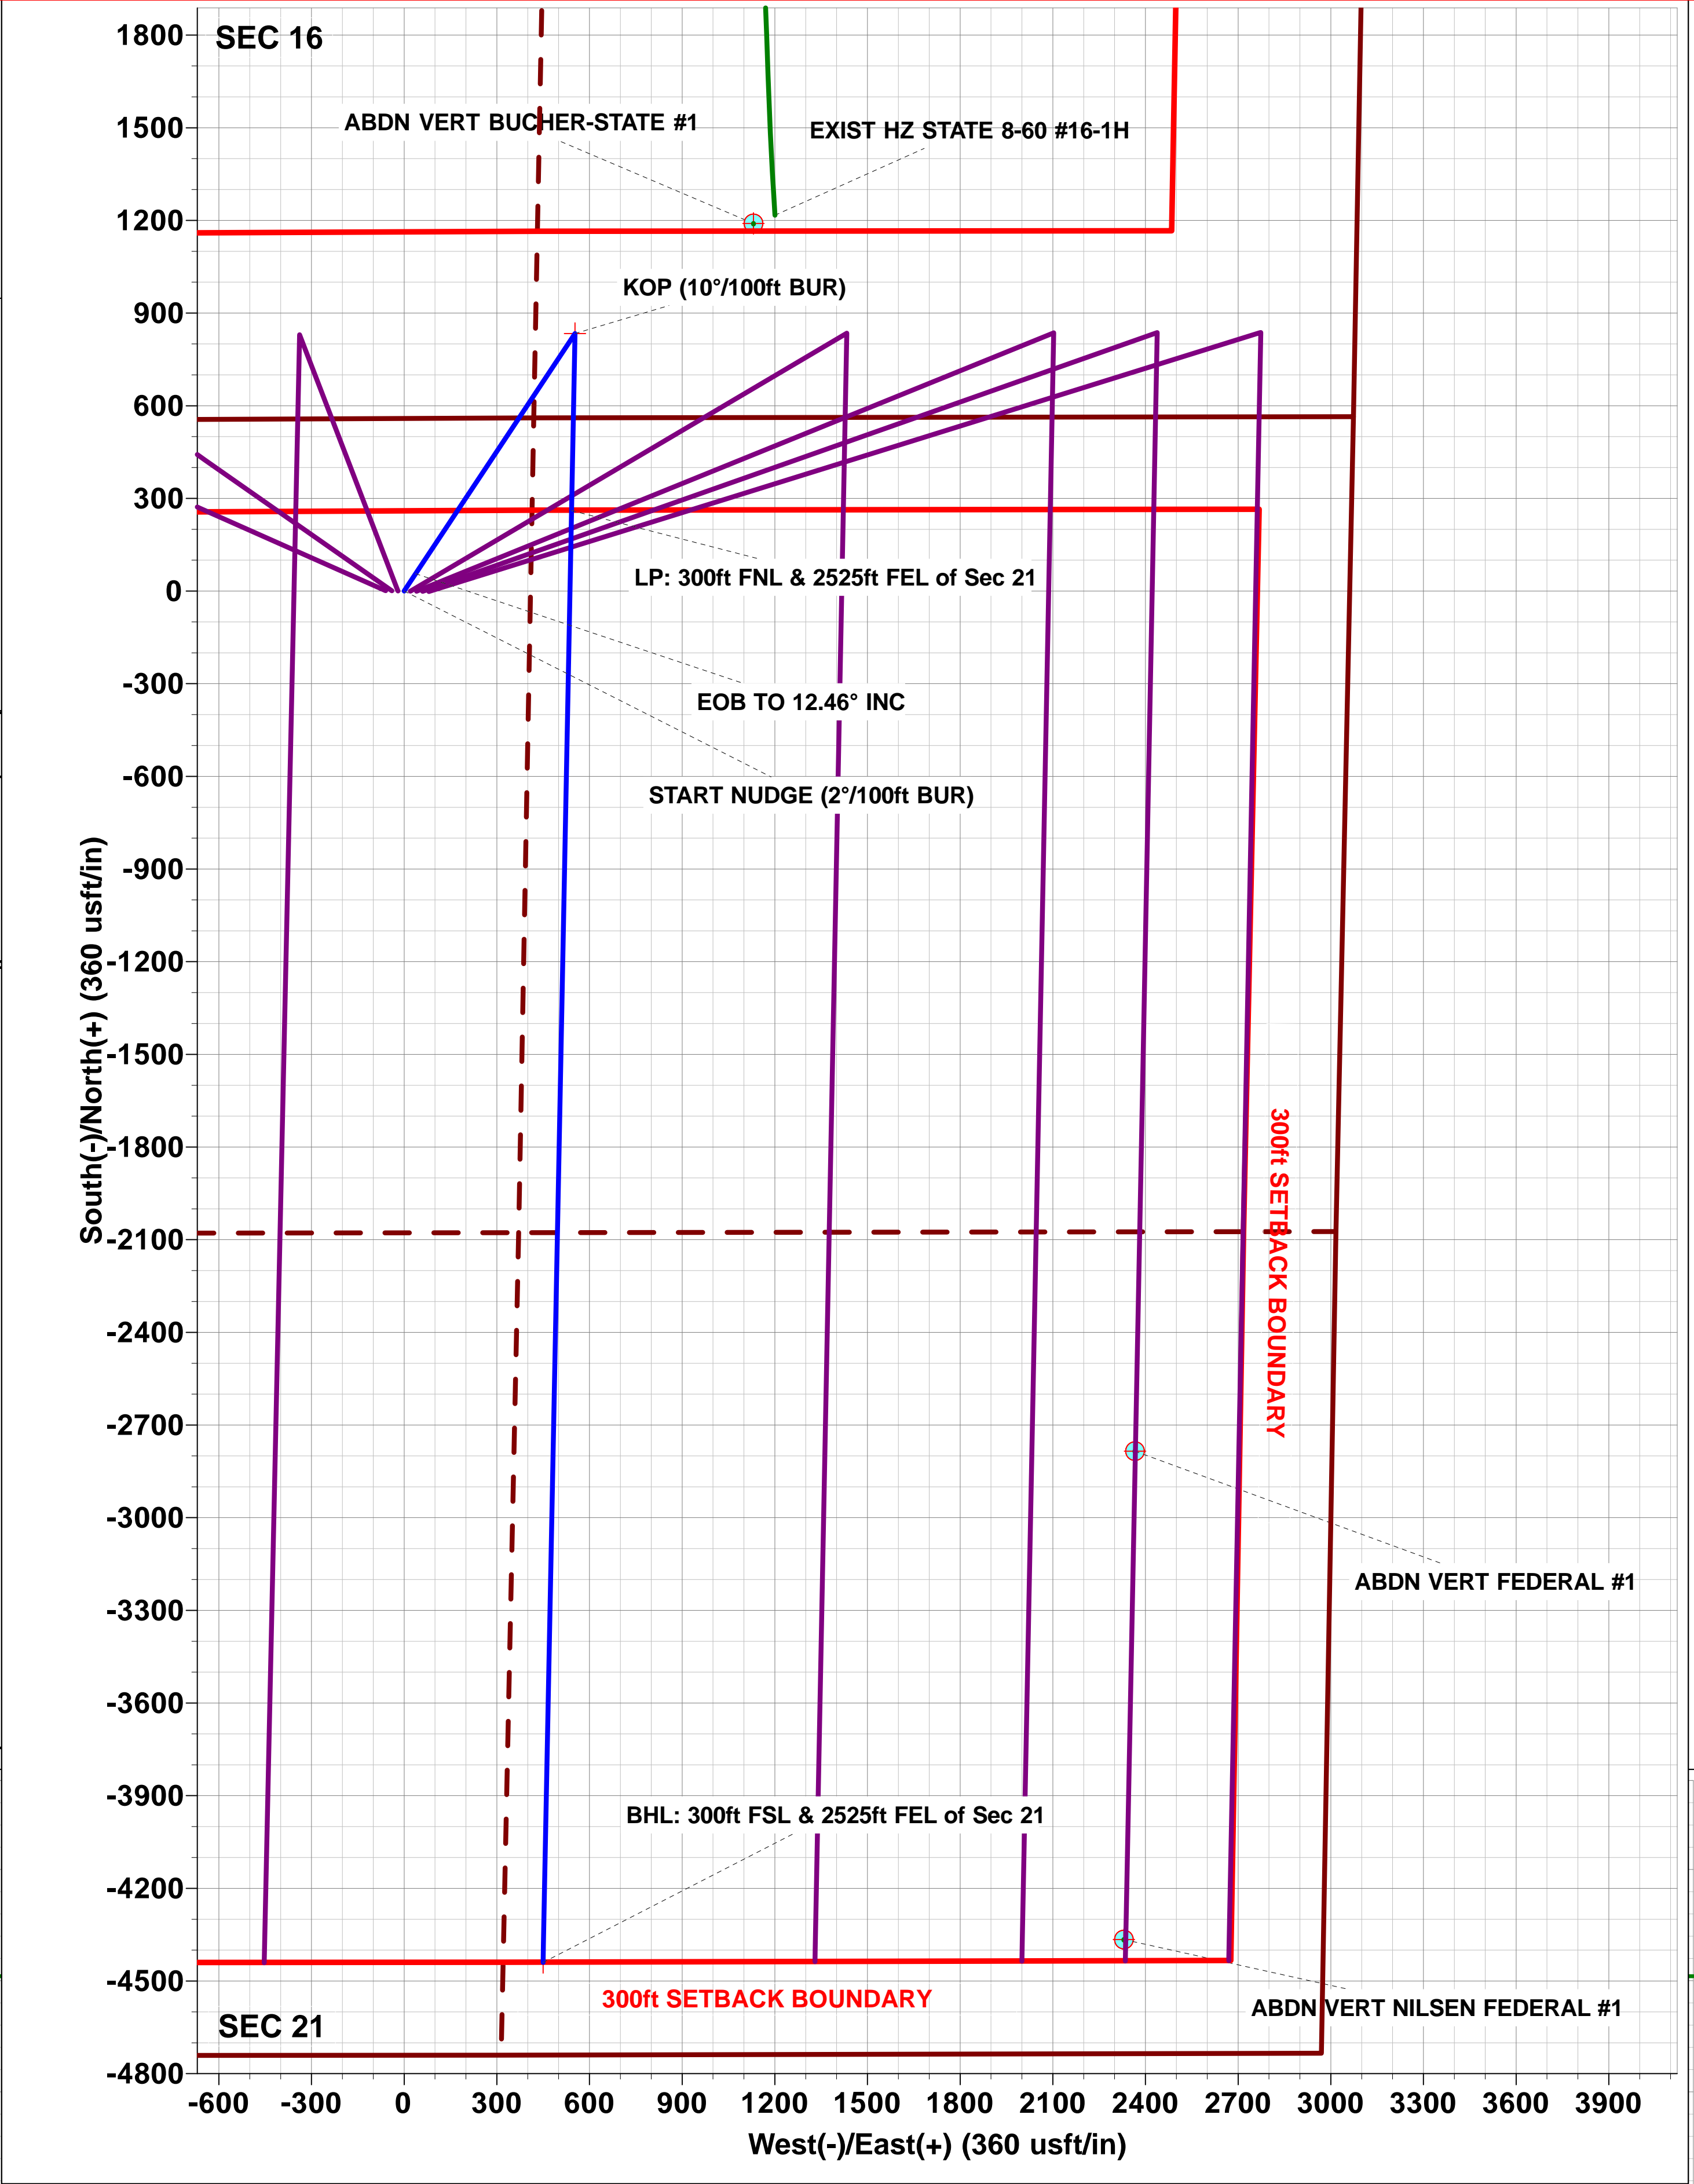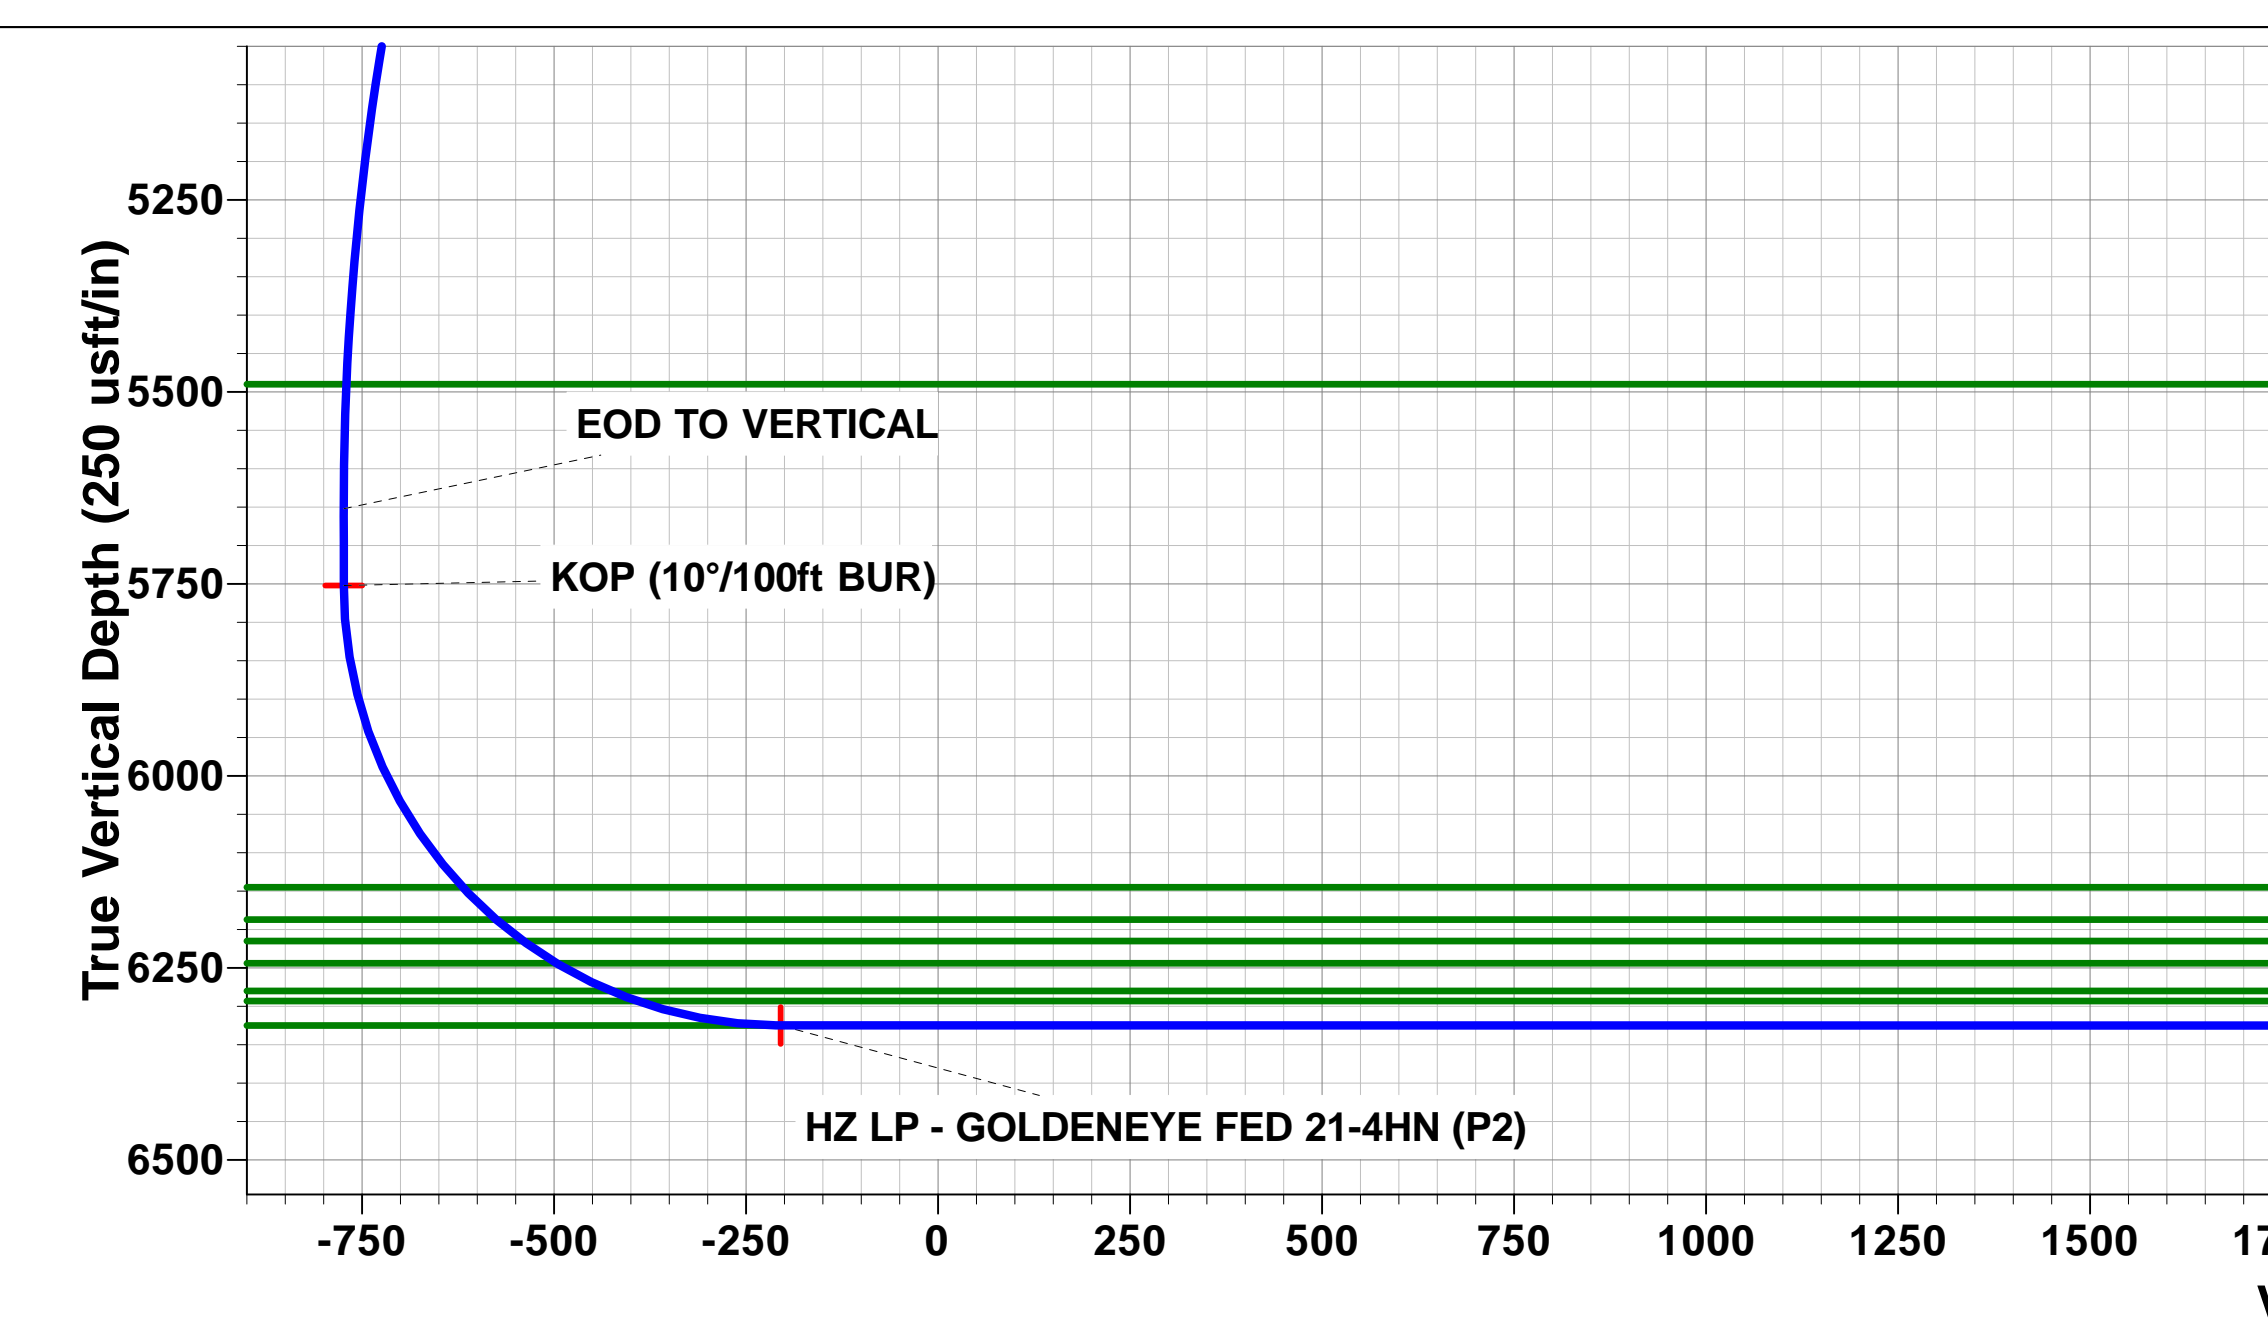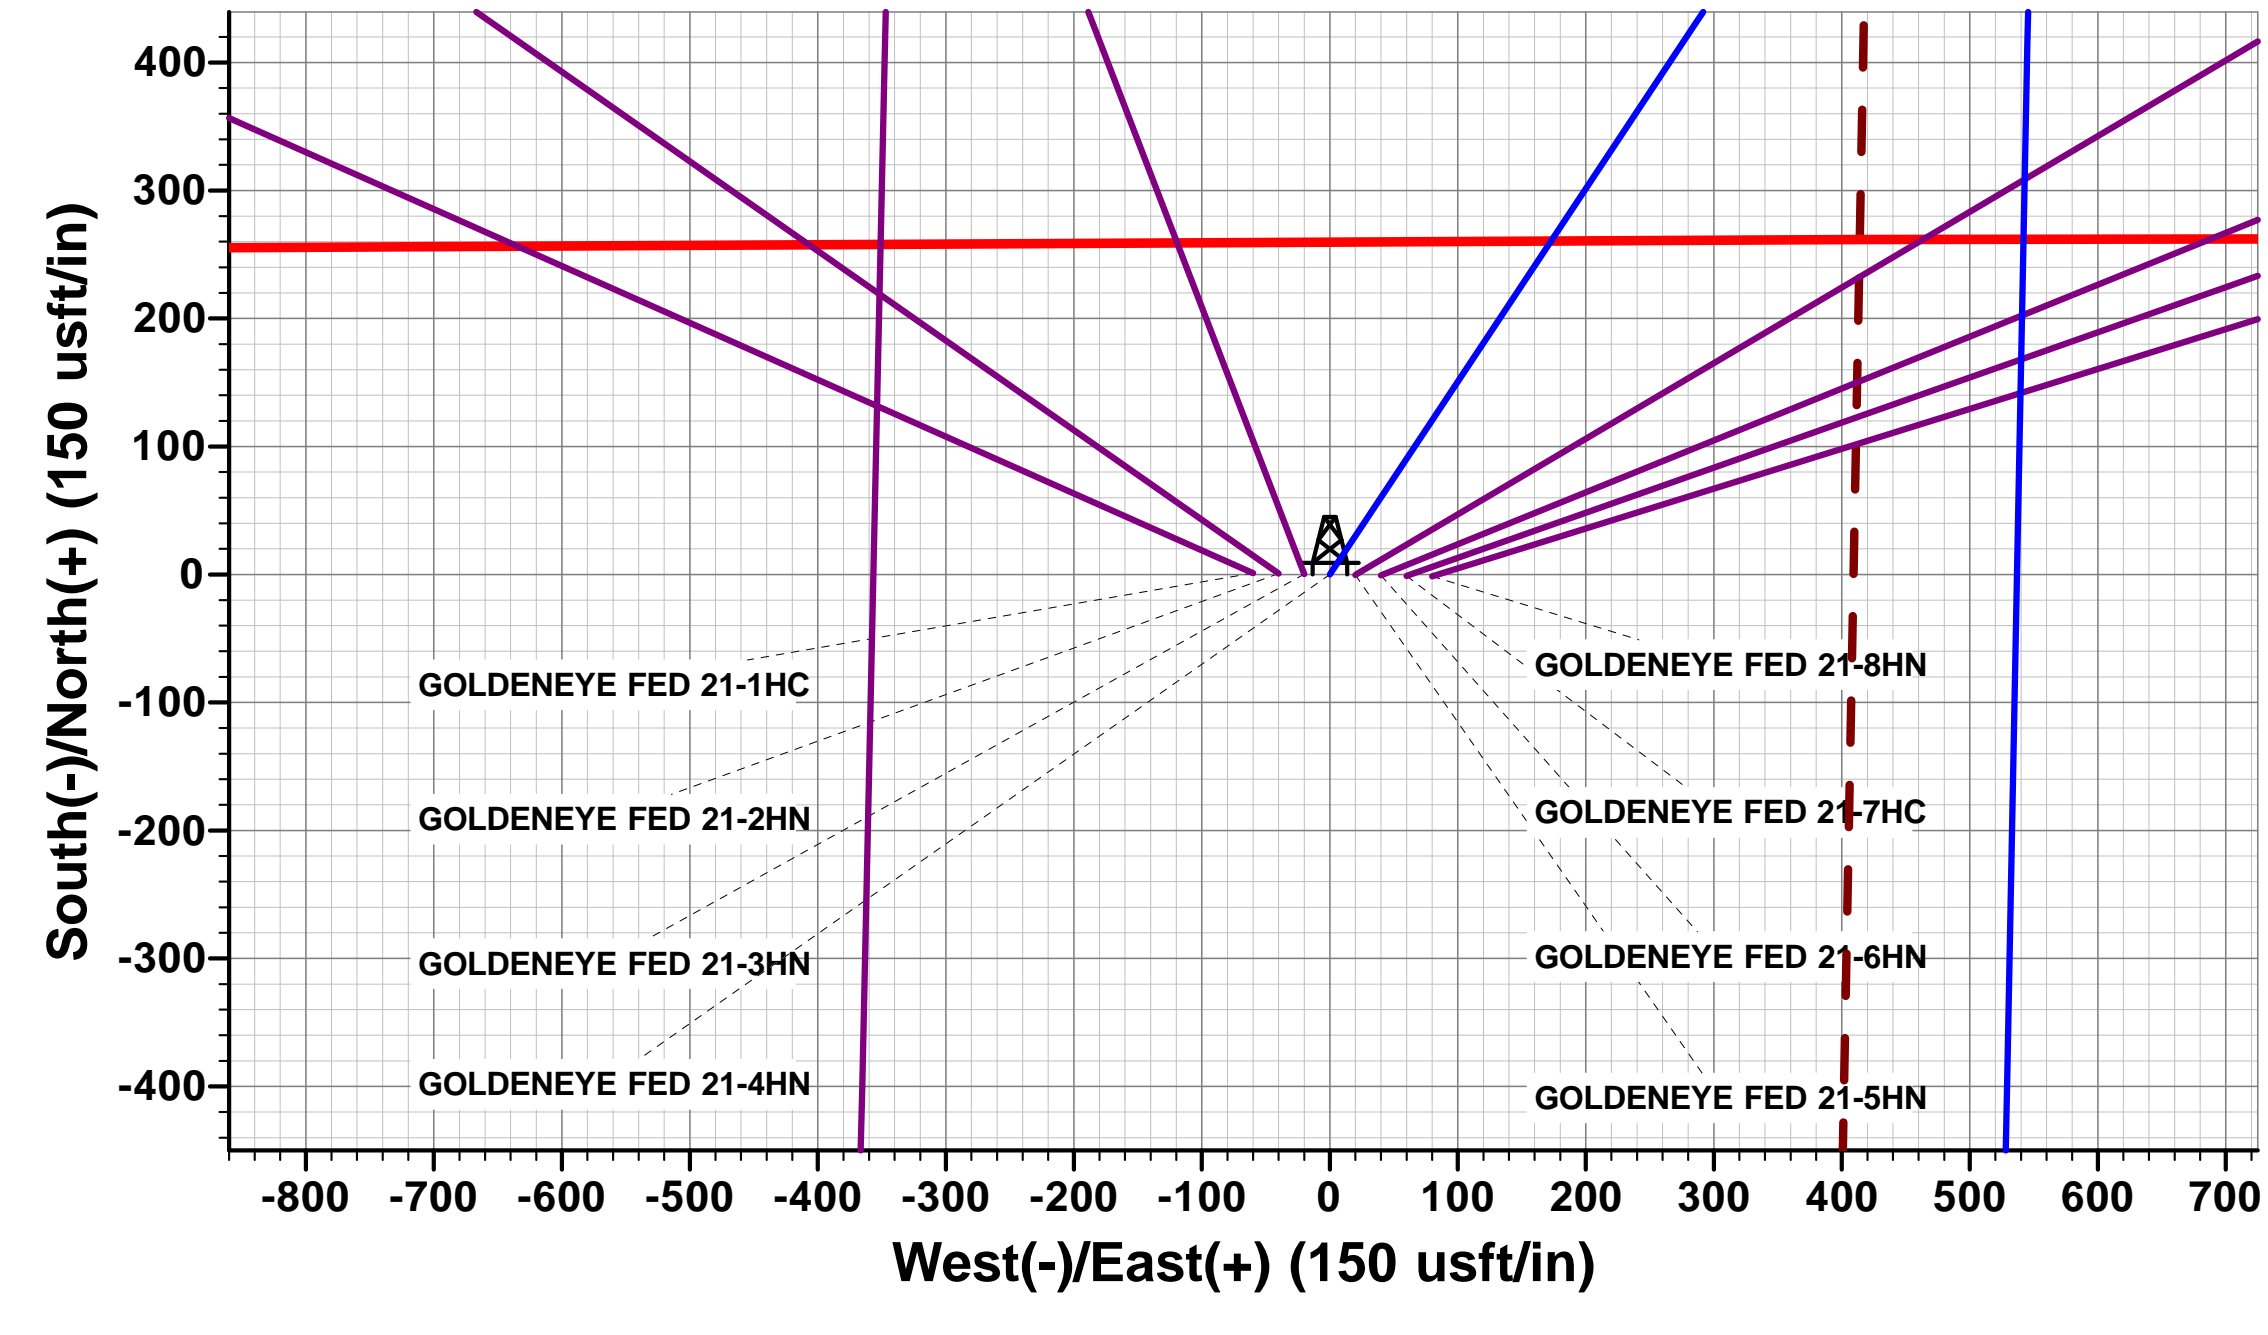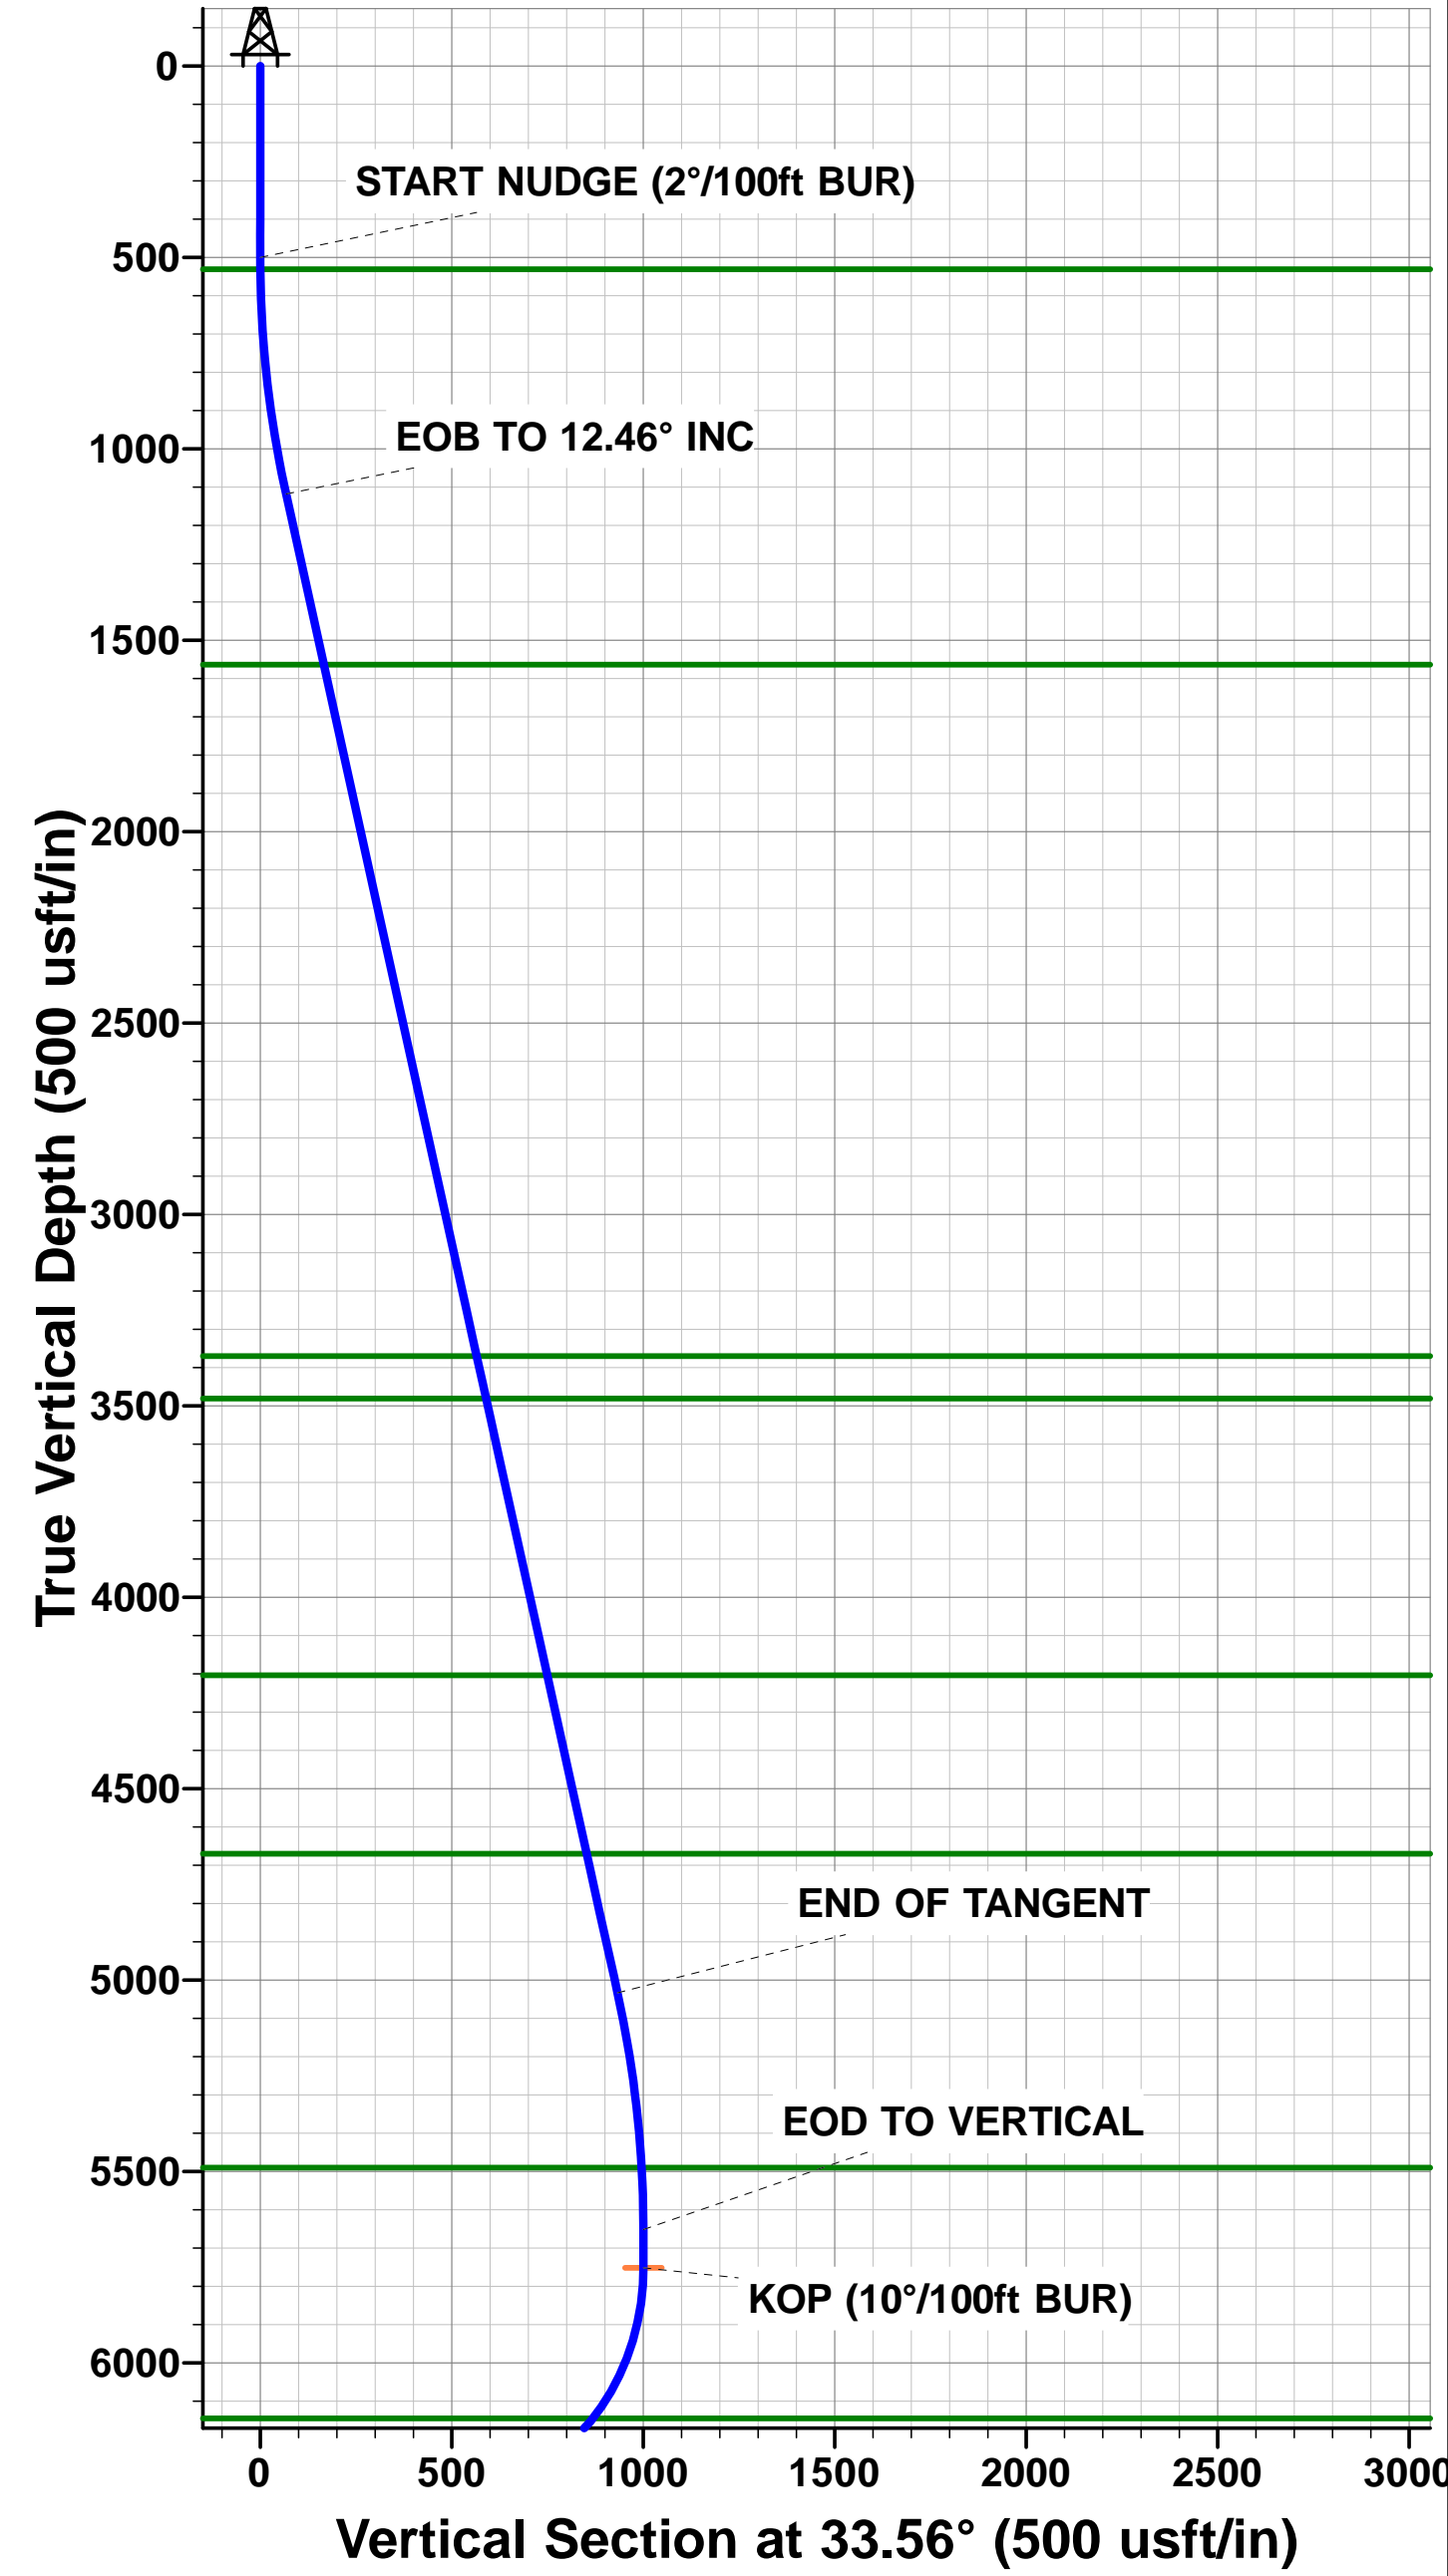

Planning Report



Database:	Database 1	Local Co-ordinate Reference:	Well GOLDENEYE FED 21-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB 20' @ 4957.00usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB 20' @ 4957.00usft
Site:	NE NW SEC. 21 T8N R60W 6th P.M.	North Reference:	True
Well:	GOLDENEYE FED 21-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Project	WELD COUNTY, COLORADO (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		Using geodetic scale factor

Site	NE NW SEC. 21 T8N R60W 6th P.M.		
Site Position:		Northing:	1,484,003.48 usft
From:	Lat/Long	Easting:	3,387,339.89 usft
Position Uncertainty:	0.00 usft	Slot Radius:	1.10 ft
		Latitude:	40.653615
		Longitude:	-104.103964
		Grid Convergence:	0.90 °

Well	GOLDENEYE FED 21-4HN		
Well Position	+N/-S	-24.36 usft	Northing:
	+E/-W	1,677.61 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
		Latitude:	40.653548
		Longitude:	-104.097918
		Ground Level:	4,937.00 usft

Wellbore	ORIGINAL WELLBORE				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	11/07/2019	7.65	67.10	52,354

Design	PROPOSAL #2			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	6,325.00	0.00	0.00	174.21

Plan Sections											
MD (usft)	Inc (°)	Azi (°)	Vertical Depth	SS (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usf)	Build Rate (°/100usf)	Turn Rate (°/100usf)	TFO (°)	Target
0.00	0.00	0.00	0.00	-4,957.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	-4,457.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,123.21	12.46	33.56	1,118.31	-3,838.69	56.26	37.33	2.00	2.00	0.00	33.56	
5,133.15	12.46	33.56	5,033.73	76.73	777.46	515.77	0.00	0.00	0.00	0.00	
5,756.36	0.00	0.00	5,652.04	695.04	833.72	553.10	2.00	-2.00	0.00	180.00	
5,856.36	0.00	0.00	5,752.04	795.04	833.72	553.10	0.00	0.00	0.00	0.00	KOP - GOLDENEYE
6,756.36	90.00	181.12	6,325.00	1,368.00	260.87	541.90	10.00	10.00	-19.88	181.12	HZ LP - GOLDENEYE
11,457.81	90.00	181.12	6,325.00	1,368.00	-4,439.67	449.87	0.00	0.00	0.00	79.96	BHL - GOLDENEYE

Planning Report



Database:	Database 1	Local Co-ordinate Reference:	Well GOLDENEYE FED 21-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB 20' @ 4957.00usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB 20' @ 4957.00usft
Site:	NE NW SEC. 21 T8N R60W 6th P.M.	North Reference:	True
Well:	GOLDENEYE FED 21-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Planned Survey										
MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
SHL: 559ft FNL & 2232ft FWL of Sec 21										
0.00	0.00	0.00	0.00	4,957.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	4,857.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	4,757.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	4,657.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	4,557.00	0.00	0.00	0.00	0.00	0.00	0.00
START NUDGE (2°/100ft BUR)										
500.00	0.00	0.00	500.00	4,457.00	0.00	0.00	0.00	0.00	0.00	0.00
Fox Hills Base										
531.00	0.62	33.56	531.00	4,426.00	0.14	0.09	-0.13	2.00	2.00	0.00
600.00	2.00	33.56	599.98	4,357.02	1.45	0.96	-1.35	2.00	2.00	0.00
700.00	4.00	33.56	699.84	4,257.16	5.82	3.86	-5.40	2.00	2.00	0.00
800.00	6.00	33.56	799.45	4,157.55	13.08	8.68	-12.14	2.00	2.00	0.00
900.00	8.00	33.56	898.70	4,058.30	23.23	15.41	-21.56	2.00	2.00	0.00
1,000.00	10.00	33.56	997.47	3,959.53	36.27	24.06	-33.66	2.00	2.00	0.00
1,100.00	12.00	33.56	1,095.62	3,861.38	52.17	34.61	-48.41	2.00	2.00	0.00
EOB TO 12.46° INC										
1,123.21	12.46	33.56	1,118.31	3,838.69	56.26	37.33	-52.21	2.00	2.00	0.00
1,200.00	12.46	33.56	1,193.29	3,763.71	70.08	46.49	-65.03	0.00	0.00	0.00
1,300.00	12.46	33.56	1,290.93	3,666.07	88.06	58.42	-81.72	0.00	0.00	0.00
1,400.00	12.46	33.56	1,388.57	3,568.43	106.05	70.35	-98.41	0.00	0.00	0.00
1,500.00	12.46	33.56	1,486.22	3,470.78	124.03	82.28	-115.10	0.00	0.00	0.00
Pierre Shale Top										
1,579.66	12.46	33.56	1,564.00	3,393.00	138.36	91.79	-128.40	0.00	0.00	0.00
1,600.00	12.46	33.56	1,583.86	3,373.14	142.02	94.21	-131.79	0.00	0.00	0.00
1,700.00	12.46	33.56	1,681.50	3,275.50	160.00	106.15	-148.48	0.00	0.00	0.00
1,800.00	12.46	33.56	1,779.14	3,177.86	177.99	118.08	-165.18	0.00	0.00	0.00
1,900.00	12.46	33.56	1,876.79	3,080.21	195.97	130.01	-181.87	0.00	0.00	0.00
2,000.00	12.46	33.56	1,974.43	2,982.57	213.96	141.94	-198.56	0.00	0.00	0.00
2,100.00	12.46	33.56	2,072.07	2,884.93	231.94	153.87	-215.25	0.00	0.00	0.00
2,200.00	12.46	33.56	2,169.72	2,787.28	249.93	165.80	-231.94	0.00	0.00	0.00
2,300.00	12.46	33.56	2,267.36	2,689.64	267.91	177.74	-248.63	0.00	0.00	0.00
2,400.00	12.46	33.56	2,365.00	2,592.00	285.90	189.67	-265.32	0.00	0.00	0.00
2,500.00	12.46	33.56	2,462.65	2,494.35	303.88	201.60	-282.01	0.00	0.00	0.00
2,600.00	12.46	33.56	2,560.29	2,396.71	321.87	213.53	-298.70	0.00	0.00	0.00
2,700.00	12.46	33.56	2,657.93	2,299.07	339.85	225.46	-315.39	0.00	0.00	0.00
2,800.00	12.46	33.56	2,755.58	2,201.42	357.84	237.39	-332.08	0.00	0.00	0.00
2,900.00	12.46	33.56	2,853.22	2,103.78	375.82	249.32	-348.77	0.00	0.00	0.00
3,000.00	12.46	33.56	2,950.86	2,006.14	393.81	261.26	-365.46	0.00	0.00	0.00
3,100.00	12.46	33.56	3,048.51	1,908.49	411.79	273.19	-382.15	0.00	0.00	0.00
3,200.00	12.46	33.56	3,146.15	1,810.85	429.78	285.12	-398.84	0.00	0.00	0.00
3,300.00	12.46	33.56	3,243.79	1,713.21	447.76	297.05	-415.53	0.00	0.00	0.00
3,400.00	12.46	33.56	3,341.43	1,615.57	465.75	308.98	-432.23	0.00	0.00	0.00
Richard Sandstone										
3,429.26	12.46	33.56	3,370.00	1,587.00	471.01	312.47	-437.11	0.00	0.00	0.00
3,500.00	12.46	33.56	3,439.08	1,517.92	483.73	320.91	-448.92	0.00	0.00	0.00
Parkman Sandstone										
3,542.93	12.46	33.56	3,481.00	1,476.00	491.45	326.04	-456.08	0.00	0.00	0.00
3,600.00	12.46	33.56	3,536.72	1,420.28	501.72	332.85	-465.61	0.00	0.00	0.00
3,700.00	12.46	33.56	3,634.36	1,322.64	519.70	344.78	-482.30	0.00	0.00	0.00
3,800.00	12.46	33.56	3,732.01	1,224.99	537.69	356.71	-498.99	0.00	0.00	0.00
3,900.00	12.46	33.56	3,829.65	1,127.35	555.67	368.64	-515.68	0.00	0.00	0.00
4,000.00	12.46	33.56	3,927.29	1,029.71	573.66	380.57	-532.37	0.00	0.00	0.00

Planning Report



Database:	Database 1	Local Co-ordinate Reference:	Well GOLDENEYE FED 21-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB 20' @ 4957.00usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB 20' @ 4957.00usft
Site:	NE NW SEC. 21 T8N R60W 6th P.M.	North Reference:	True
Well:	GOLDENEYE FED 21-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Planned Survey										
MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,100.00	12.46	33.56	4,024.94	932.06	591.64	392.50	-549.06	0.00	0.00	0.00
4,200.00	12.46	33.56	4,122.58	834.42	609.63	404.43	-565.75	0.00	0.00	0.00
Sussex Sandstone										
4,283.39	12.46	33.56	4,204.00	753.00	624.63	414.38	-579.67	0.00	0.00	0.00
4,300.00	12.46	33.56	4,220.22	736.78	627.61	416.37	-582.44	0.00	0.00	0.00
4,400.00	12.46	33.56	4,317.87	639.13	645.60	428.30	-599.13	0.00	0.00	0.00
4,500.00	12.46	33.56	4,415.51	541.49	663.58	440.23	-615.82	0.00	0.00	0.00
4,600.00	12.46	33.56	4,513.15	443.85	681.57	452.16	-632.51	0.00	0.00	0.00
4,700.00	12.46	33.56	4,610.79	346.21	699.55	464.09	-649.20	0.00	0.00	0.00
Shannon Sandstone										
4,760.63	12.46	33.56	4,670.00	287.00	710.46	471.33	-659.32	0.00	0.00	0.00
4,800.00	12.46	33.56	4,708.44	248.56	717.54	476.02	-665.89	0.00	0.00	0.00
4,900.00	12.46	33.56	4,806.08	150.92	735.52	487.96	-682.58	0.00	0.00	0.00
5,000.00	12.46	33.56	4,903.72	53.28	753.51	499.89	-699.28	0.00	0.00	0.00
5,100.00	12.46	33.56	5,001.37	-44.37	771.49	511.82	-715.97	0.00	0.00	0.00
END OF TANGENT										
5,133.15	12.46	33.56	5,033.73	-76.73	777.46	515.77	-721.50	0.00	0.00	0.00
5,200.00	11.13	33.56	5,099.17	-142.17	788.84	523.33	-732.07	2.00	-2.00	0.00
5,300.00	9.13	33.56	5,197.61	-240.61	803.49	533.05	-745.66	2.00	-2.00	0.00
5,400.00	7.13	33.56	5,296.60	-339.60	815.27	540.86	-756.60	2.00	-2.00	0.00
5,500.00	5.13	33.56	5,396.02	-439.02	824.17	546.76	-764.85	2.00	-2.00	0.00
TeePee Buttes										
5,594.23	3.24	33.56	5,490.00	-533.00	829.90	550.56	-770.17	2.00	-2.00	0.00
5,600.00	3.13	33.56	5,495.76	-538.76	830.17	550.74	-770.41	2.00	-2.00	0.00
5,700.00	1.13	33.56	5,595.69	-638.69	833.26	552.79	-773.28	2.00	-2.00	0.00
EOD TO VERTICAL										
5,756.36	0.00	0.00	5,652.04	-695.04	833.72	553.10	-773.71	2.00	-2.00	0.00
5,800.00	0.00	0.00	5,695.68	-738.68	833.72	553.10	-773.71	0.00	0.00	0.00
KOP (10°/100ft BUR)										
5,856.36	0.00	0.00	5,752.04	-795.04	833.72	553.10	-773.71	0.00	0.00	0.00
5,900.00	4.36	181.12	5,795.64	-838.64	832.06	553.07	-772.06	10.00	10.00	0.00
6,000.00	14.36	181.12	5,894.18	-937.18	815.81	552.75	-755.93	10.00	10.00	0.00
6,100.00	24.36	181.12	5,988.41	-1,031.41	782.70	552.10	-723.06	10.00	10.00	0.00
6,200.00	34.36	181.12	6,075.45	-1,118.45	733.74	551.15	-674.44	10.00	10.00	0.00
Sharon Springs										
6,289.38	43.30	181.12	6,145.00	-1,188.00	677.76	550.05	-618.86	10.00	10.00	0.00
6,300.00	44.36	181.12	6,152.66	-1,195.66	670.41	549.91	-611.55	10.00	10.00	0.00
Niobrara Top										
6,350.25	49.36	181.12	6,187.00	-1,230.00	633.75	549.19	-575.16	9.95	9.95	0.00
Niobrara A Chalk										
6,395.38	53.90	181.12	6,215.00	-1,258.00	598.37	548.50	-540.03	10.06	10.06	0.00
6,400.00	54.36	181.12	6,217.70	-1,260.70	594.63	548.43	-536.31	10.00	10.00	0.00
Niobrara A Chalk Base										
6,447.99	59.16	181.12	6,244.00	-1,287.00	554.51	547.64	-496.48	10.00	10.00	0.00
6,500.00	64.36	181.12	6,268.60	-1,311.60	508.71	546.75	-451.00	10.00	10.00	0.00
Niobrara B1 Chalk Top										
6,527.77	67.14	181.12	6,280.00	-1,323.00	483.41	546.25	-425.87	10.00	10.00	0.00
Niobrara B1 Chalk Base										
6,563.97	70.76	181.12	6,293.00	-1,336.00	449.63	545.59	-392.34	10.00	10.00	0.00
6,600.00	74.36	181.12	6,303.80	-1,346.80	415.27	544.92	-358.22	10.00	10.00	0.00
6,700.00	84.36	181.12	6,322.23	-1,365.23	317.13	543.00	-260.77	10.00	10.00	0.00
LP: 300ft FNL & 2525ft FEL of Sec 21 - Niobrara B2 Chalk Top (Target)										

Planning Report



Database:	Database 1	Local Co-ordinate Reference:	Well GOLDENEYE FED 21-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB 20' @ 4957.00usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB 20' @ 4957.00usft
Site:	NE NW SEC. 21 T8N R60W 6th P.M.	North Reference:	True
Well:	GOLDENEYE FED 21-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Planned Survey										
MD (usft)	Inc (°)	Azi (°)	TVD (usft)	SS (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
6,756.36	90.00	181.12	6,325.00	-1,368.00	260.87	541.90	-204.91	10.00	10.00	0.00
6,800.00	90.00	181.12	6,325.00	-1,368.00	217.24	541.05	-161.59	0.00	0.00	0.00
6,900.00	90.00	181.12	6,325.00	-1,368.00	117.26	539.09	-62.31	0.00	0.00	0.00
7,000.00	90.00	181.12	6,325.00	-1,368.00	17.28	537.14	36.96	0.00	0.00	0.00
7,100.00	90.00	181.12	6,325.00	-1,368.00	-82.70	535.18	136.24	0.00	0.00	0.00
7,200.00	90.00	181.12	6,325.00	-1,368.00	-182.68	533.23	235.51	0.00	0.00	0.00
7,300.00	90.00	181.12	6,325.00	-1,368.00	-282.67	531.27	334.78	0.00	0.00	0.00
7,400.00	90.00	181.12	6,325.00	-1,368.00	-382.65	529.32	434.06	0.00	0.00	0.00
7,500.00	90.00	181.12	6,325.00	-1,368.00	-482.63	527.36	533.33	0.00	0.00	0.00
7,600.00	90.00	181.12	6,325.00	-1,368.00	-582.61	525.41	632.61	0.00	0.00	0.00
7,700.00	90.00	181.12	6,325.00	-1,368.00	-682.59	523.45	731.88	0.00	0.00	0.00
7,800.00	90.00	181.12	6,325.00	-1,368.00	-782.57	521.49	831.16	0.00	0.00	0.00
7,900.00	90.00	181.12	6,325.00	-1,368.00	-882.55	519.54	930.43	0.00	0.00	0.00
8,000.00	90.00	181.12	6,325.00	-1,368.00	-982.53	517.58	1,029.70	0.00	0.00	0.00
8,100.00	90.00	181.12	6,325.00	-1,368.00	-1,082.51	515.63	1,128.98	0.00	0.00	0.00
8,200.00	90.00	181.12	6,325.01	-1,368.01	-1,182.49	513.67	1,228.25	0.00	0.00	0.00
8,300.00	90.00	181.12	6,325.01	-1,368.01	-1,282.47	511.71	1,327.53	0.00	0.00	0.00
8,400.00	90.00	181.12	6,325.01	-1,368.01	-1,382.45	509.76	1,426.80	0.00	0.00	0.00
8,500.00	90.00	181.12	6,325.01	-1,368.01	-1,482.44	507.80	1,526.08	0.00	0.00	0.00
8,600.00	90.00	181.12	6,325.01	-1,368.01	-1,582.42	505.84	1,625.35	0.00	0.00	0.00
8,700.00	90.00	181.12	6,325.01	-1,368.01	-1,682.40	503.89	1,724.62	0.00	0.00	0.00
8,800.00	90.00	181.12	6,325.01	-1,368.01	-1,782.38	501.93	1,823.90	0.00	0.00	0.00
8,900.00	90.00	181.12	6,325.01	-1,368.01	-1,882.36	499.97	1,923.17	0.00	0.00	0.00
9,000.00	90.00	181.12	6,325.01	-1,368.01	-1,982.34	498.01	2,022.45	0.00	0.00	0.00
9,100.00	90.00	181.12	6,325.01	-1,368.01	-2,082.32	496.06	2,121.72	0.00	0.00	0.00
9,200.00	90.00	181.12	6,325.01	-1,368.01	-2,182.30	494.10	2,220.99	0.00	0.00	0.00
9,300.00	90.00	181.12	6,325.01	-1,368.01	-2,282.28	492.14	2,320.27	0.00	0.00	0.00
9,400.00	90.00	181.12	6,325.01	-1,368.01	-2,382.26	490.18	2,419.54	0.00	0.00	0.00
9,500.00	90.00	181.12	6,325.01	-1,368.01	-2,482.24	488.23	2,518.82	0.00	0.00	0.00
9,600.00	90.00	181.12	6,325.01	-1,368.01	-2,582.22	486.27	2,618.09	0.00	0.00	0.00
9,700.00	90.00	181.12	6,325.01	-1,368.01	-2,682.21	484.31	2,717.37	0.00	0.00	0.00
9,800.00	90.00	181.12	6,325.01	-1,368.01	-2,782.19	482.35	2,816.64	0.00	0.00	0.00
9,900.00	90.00	181.12	6,325.01	-1,368.01	-2,882.17	480.39	2,915.91	0.00	0.00	0.00
10,000.00	90.00	181.12	6,325.01	-1,368.01	-2,982.15	478.43	3,015.19	0.00	0.00	0.00
10,100.00	90.00	181.12	6,325.00	-1,368.00	-3,082.13	476.47	3,114.46	0.00	0.00	0.00
10,200.00	90.00	181.12	6,325.00	-1,368.00	-3,182.11	474.52	3,213.74	0.00	0.00	0.00
10,300.00	90.00	181.12	6,325.00	-1,368.00	-3,282.09	472.56	3,313.01	0.00	0.00	0.00
10,400.00	90.00	181.12	6,325.00	-1,368.00	-3,382.07	470.60	3,412.28	0.00	0.00	0.00
10,500.00	90.00	181.12	6,325.00	-1,368.00	-3,482.05	468.64	3,511.56	0.00	0.00	0.00
10,600.00	90.00	181.12	6,325.00	-1,368.00	-3,582.03	466.68	3,610.83	0.00	0.00	0.00
10,700.00	90.00	181.12	6,325.00	-1,368.00	-3,682.01	464.72	3,710.11	0.00	0.00	0.00
10,800.00	90.00	181.12	6,325.00	-1,368.00	-3,781.99	462.76	3,809.38	0.00	0.00	0.00
10,900.00	90.00	181.12	6,325.00	-1,368.00	-3,881.98	460.80	3,908.65	0.00	0.00	0.00
11,000.00	90.00	181.12	6,325.00	-1,368.00	-3,981.96	458.84	4,007.93	0.00	0.00	0.00
11,100.00	90.00	181.12	6,325.00	-1,368.00	-4,081.94	456.88	4,107.20	0.00	0.00	0.00
11,200.00	90.00	181.12	6,325.00	-1,368.00	-4,181.92	454.92	4,206.47	0.00	0.00	0.00
11,300.00	90.00	181.12	6,325.00	-1,368.00	-4,281.90	452.96	4,305.75	0.00	0.00	0.00
11,400.00	90.00	181.12	6,325.00	-1,368.00	-4,381.88	451.00	4,405.02	0.00	0.00	0.00
BHL: 300ft FSL & 2525ft FEL of Sec 21										
11,457.81	90.00	181.12	6,325.00	-1,368.00	-4,439.67	449.87	4,462.41	0.00	0.00	0.00

Planning Report



Database:	Database 1	Local Co-ordinate Reference:	Well GOLDENEYE FED 21-4HN
Company:	MALLARD EXPLORATION	TVD Reference:	KB 20' @ 4957.00usft
Project:	WELD COUNTY, COLORADO (NAD 83)	MD Reference:	KB 20' @ 4957.00usft
Site:	NE NW SEC. 21 T8N R60W 6th P.M.	North Reference:	True
Well:	GOLDENEYE FED 21-4HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL #2		

Formations						
MD (usft)	TVD (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
531.00	531.00	Fox Hills Base				
1,579.66	1,564.00	Pierre Shale Top				
3,429.26	3,370.00	Richard Sandstone				
3,542.93	3,481.00	Parkman Sandstone				
4,283.39	4,204.00	Sussex Sandstone				
4,760.63	4,670.00	Shannon Sandstone				
5,594.23	5,490.00	TeePee Buttes				
6,289.38	6,145.00	Sharon Springs				
6,350.25	6,187.00	Niobrara Top				
6,395.38	6,215.00	Niobrara A Chalk				
6,447.99	6,244.00	Niobrara A Chalk Base				
6,527.77	6,280.00	Niobrara B1 Chalk Top				
6,563.97	6,293.00	Niobrara B1 Chalk Base				
6,756.36	6,325.00	Niobrara B2 Chalk Top (Target)				

Plan Annotations					
MD (usft)	TVD (usft)	Local Coordinates		Comment	
		+N/-S (usft)	+E/-W (usft)		
0.00	0.00	0.00	0.00	SHL: 559ft FNL & 2232ft FWL of Sec 21	
500.00	500.00	0.00	0.00	START NUDGE (2°/100ft BUR)	
1,123.21	1,118.31	56.26	37.33	EOB TO 12.46° INC	
5,133.15	5,033.73	777.46	515.77	END OF TANGENT	
5,756.36	5,652.04	833.72	553.10	EOD TO VERTICAL	
5,856.36	5,752.04	833.72	553.10	KOP (10°/100ft BUR)	
6,756.36	6,325.00	260.87	541.90	LP: 300ft FNL & 2525ft FEL of Sec 21	
11,457.81	6,325.00	-4,439.67	449.87	BHL: 300ft FSL & 2525ft FEL of Sec 21	