

US ROCKIES WATTENBERG PLANNING

WELD-NAD83-UTMFT13N

1N-68W-21 WINDSOCK 15-21HZ PAD

WINDSOCK 21-1HZ

Plan A

Plan: Permit Rev-2

SHL Lat/Long: 40.030382/-105.007610

Survey Program: MWD+IFR

Standard Planning Report

15 February, 2019

Project: WELD-NAD83-UTMFT13N
Site: 1N-68W-21 WINDSOCK 15-21HZ PAD
Well: WINDSOCK 21-1HZ
Wellbore: Plan A
Design: Permit Rev-2

US ROCKIES WATTENBERG PLANNING

CASING DETAILS

TVD	MD	Name	Size
1500.00	1523.46	9 5/8" Csg	9-5/8
7899.00	8920.13	Top of Production	5-1/2

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	
3	1900.00	24.75	259.00	1849.16	-66.95	-344.42	1.50	259.00	-69.95	
4	4910.00	24.75	259.00	4582.67	-307.40	-1581.43	0.00	0.00	-321.19	
5	6396.67	24.75	223.00	5940.41	-596.00	-2102.09	1.00	-106.44	-614.32	
6	7568.31	24.75	223.00	7004.43	-954.74	-2436.62	0.00	0.00	-975.97	
7	8920.13	90.18	0.50	7899.00	-269.02	-2710.28	8.00	134.68	-292.66	
8	19324.46	90.18	0.50	7867.00	10134.87	-2620.29	0.00	0.00	10111.62	WINDSOCK 21-1HZ_BHL

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude
WINDSOCK 21-1HZ_SHL	0.00	0.00	0.00	40.030382	-105.007610
WINDSOCK 21-1HZ_BHL	7867.00	10134.87	-2620.29	40.058214	-105.016974



SHL
370' FSL
2374' FEL

HEEL
116' FSL
280' FWL

BHL
50' FNL
337' FWL

FORMATION TOP DETAILS

TVDPPath	MDPath	Formation
1309.00	1323.06	Fox Hills
4456.00	4770.51	Parkman
5701.00	6133.74	Sussex
7535.00	8141.33	Sharon Springs
7567.00	8179.81	Niobrara
7729.00	8401.68	Nio B
7840.00	8618.11	Nio C

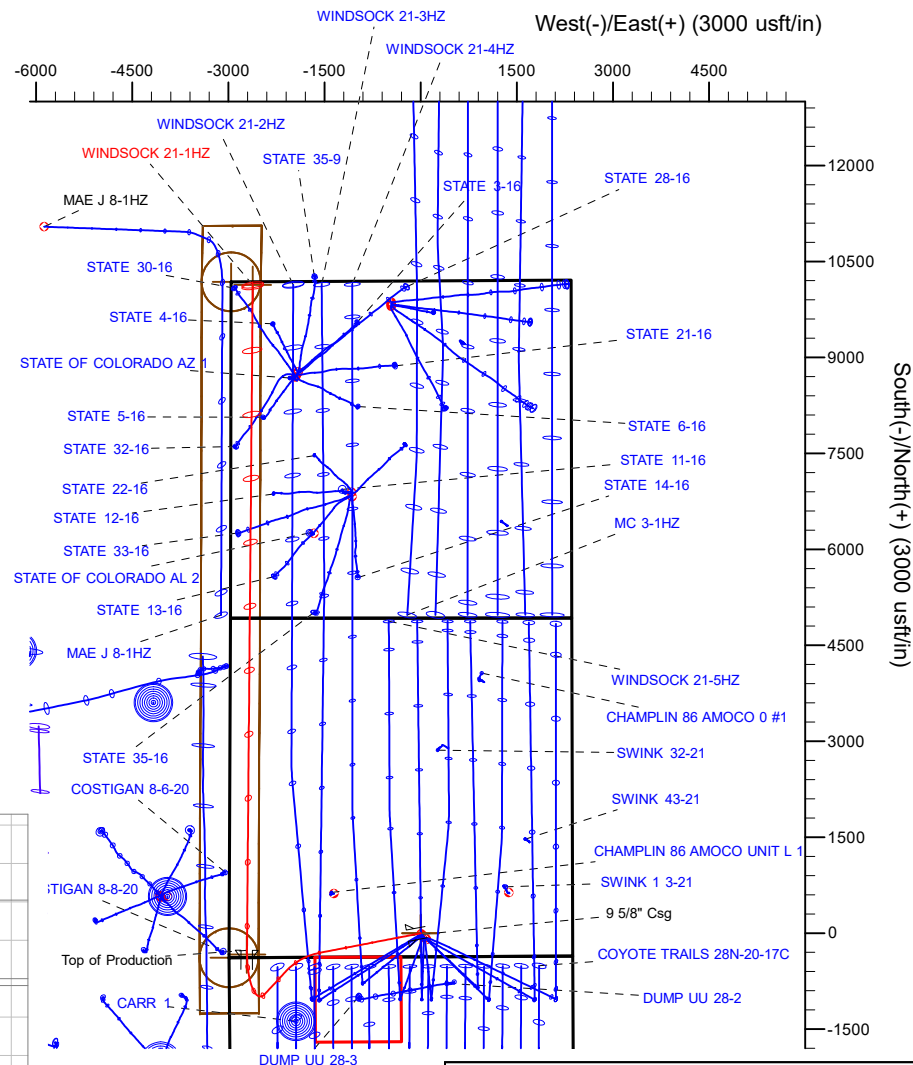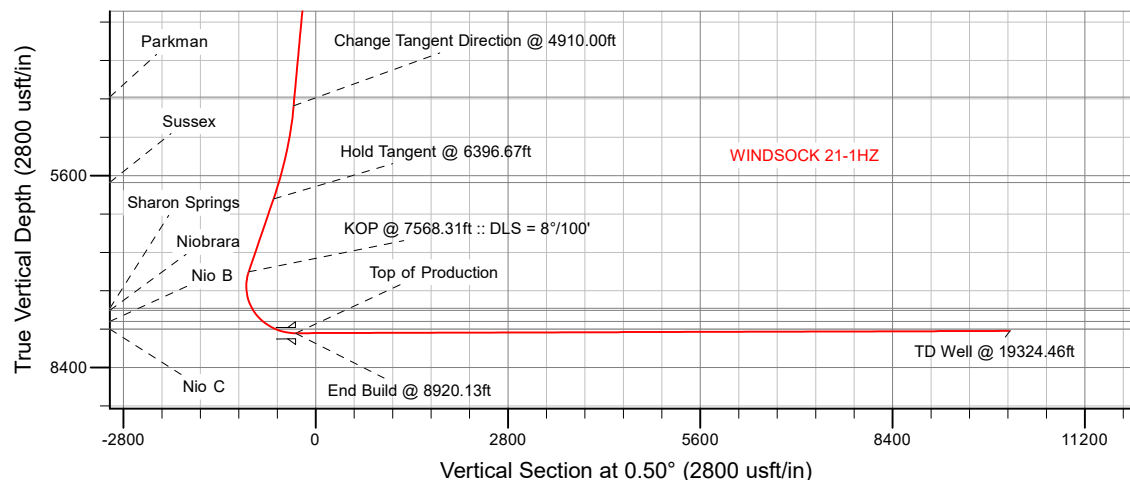

WELL DETAILS: WINDSOCK 21-1HZ

GL = 5222'

RKB = 17' @ 5239.00usft (Drilling Rig)

Plan: Permit Rev-2 (WINDSOCK 21-1HZ/Plan A)

Date: 2/15/2019

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-1HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-1HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Project	WELD-NAD83-UTMFT13N		
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Zone 13N (108 W to 102 W)		

Site	1N-68W-21 WINDSOCK 15-21HZ PAD			
Site Position:		Northing:	14,537,796.91 usft	Latitude: 40.030382
From:	Lat/Long	Easting:	1,638,286.42 usft	Longitude: -105.007610
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence: 0.00 °

Well	WINDSOCK 21-1HZ					
Well Position	+N/-S	0.00 usft	Northing:	14,537,796.91 usft	Latitude:	40.030382
	+E/-W	0.00 usft	Easting:	1,638,286.42 usft	Longitude:	-105.007610
Position Uncertainty		3.28 usft	Wellhead Elevation:		Ground Level:	5,222.00 usft

Wellbore	Plan A				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	11/19/2018	8.16	66.49	52,008.66107205

Design	Permit Rev-2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	0.50

Plan Survey Tool Program	Date	2/6/2019		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	1,500.00	Permit Rev-2 (Plan A)	APC_ISCWSA REV 2 MWD+I Fixed:v2:crustal field declinatio
2	1,500.00	19,324.46	Permit Rev-2 (Plan A)	APC_ISCWSA REV 2 MWD+I Fixed:v2:crustal field declinatio

Corporate
Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-1HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-1HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,900.00	24.75	259.00	1,849.16	-66.95	-344.42	1.50	1.50	0.00	259.00	
4,910.00	24.75	259.00	4,582.67	-307.40	-1,581.43	0.00	0.00	0.00	0.00	
6,396.67	24.75	223.00	5,940.41	-596.00	-2,102.09	1.00	0.00	-2.42	-106.44	
7,568.31	24.75	223.00	7,004.43	-954.74	-2,436.62	0.00	0.00	0.00	0.00	
8,920.13	90.18	0.50	7,899.00	-269.02	-2,710.28	8.00	4.84	10.17	134.68	
19,324.46	90.18	0.50	7,867.00	10,134.87	-2,620.29	0.00	0.00	0.00	0.00	WINDSOCK 21-1HZ_

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-1HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-1HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin Nudge @ 250.00ft									
300.00	0.75	259.00	300.00	-0.06	-0.32	-0.07	1.50	1.50	0.00
400.00	2.25	259.00	399.96	-0.56	-2.89	-0.59	1.50	1.50	0.00
500.00	3.75	259.00	499.82	-1.56	-8.03	-1.63	1.50	1.50	0.00
600.00	5.25	259.00	599.51	-3.06	-15.73	-3.19	1.50	1.50	0.00
700.00	6.75	259.00	698.96	-5.05	-25.99	-5.28	1.50	1.50	0.00
800.00	8.25	259.00	798.10	-7.54	-38.80	-7.88	1.50	1.50	0.00
900.00	9.75	259.00	896.87	-10.53	-54.16	-11.00	1.50	1.50	0.00
1,000.00	11.25	259.00	995.19	-14.00	-72.05	-14.63	1.50	1.50	0.00
1,100.00	12.75	259.00	1,093.00	-17.97	-92.45	-18.78	1.50	1.50	0.00
1,200.00	14.25	259.00	1,190.24	-22.43	-115.37	-23.43	1.50	1.50	0.00
1,300.00	15.75	259.00	1,286.83	-27.36	-140.78	-28.59	1.50	1.50	0.00
1,323.06	16.10	259.00	1,309.00	-28.57	-146.99	-29.85	1.50	1.50	0.00
Fox Hills									
1,400.00	17.25	259.00	1,382.71	-32.78	-168.65	-34.25	1.50	1.50	0.00
1,500.00	18.75	259.00	1,477.81	-38.68	-198.99	-40.41	1.50	1.50	0.00
1,523.46	19.10	259.00	1,500.00	-40.13	-206.46	-41.93	1.50	1.50	0.00
9 5/8" Csg									
1,600.00	20.25	259.00	1,572.07	-45.05	-231.75	-47.07	1.50	1.50	0.00
1,700.00	21.75	259.00	1,665.43	-51.89	-266.93	-54.21	1.50	1.50	0.00
1,800.00	23.25	259.00	1,757.81	-59.19	-304.50	-61.84	1.50	1.50	0.00
1,900.00	24.75	259.00	1,849.16	-66.95	-344.42	-69.95	1.50	1.50	0.00
Hold Tangent @ 1900.00ft									
2,000.00	24.75	259.00	1,939.98	-74.94	-385.52	-78.30	0.00	0.00	0.00
2,100.00	24.75	259.00	2,030.79	-82.93	-426.61	-86.65	0.00	0.00	0.00
2,200.00	24.75	259.00	2,121.61	-90.91	-467.71	-94.99	0.00	0.00	0.00
2,300.00	24.75	259.00	2,212.42	-98.90	-508.81	-103.34	0.00	0.00	0.00
2,400.00	24.75	259.00	2,303.23	-106.89	-549.90	-111.69	0.00	0.00	0.00
2,500.00	24.75	259.00	2,394.05	-114.88	-591.00	-120.03	0.00	0.00	0.00
2,600.00	24.75	259.00	2,484.86	-122.87	-632.10	-128.38	0.00	0.00	0.00
2,700.00	24.75	259.00	2,575.68	-130.86	-673.20	-136.73	0.00	0.00	0.00
2,800.00	24.75	259.00	2,666.49	-138.84	-714.29	-145.07	0.00	0.00	0.00
2,900.00	24.75	259.00	2,757.31	-146.83	-755.39	-153.42	0.00	0.00	0.00
3,000.00	24.75	259.00	2,848.12	-154.82	-796.49	-161.77	0.00	0.00	0.00
3,100.00	24.75	259.00	2,938.93	-162.81	-837.58	-170.11	0.00	0.00	0.00
3,200.00	24.75	259.00	3,029.75	-170.80	-878.68	-178.46	0.00	0.00	0.00
3,300.00	24.75	259.00	3,120.56	-178.79	-919.78	-186.81	0.00	0.00	0.00
3,400.00	24.75	259.00	3,211.38	-186.77	-960.87	-195.15	0.00	0.00	0.00
3,500.00	24.75	259.00	3,302.19	-194.76	-1,001.97	-203.50	0.00	0.00	0.00
3,600.00	24.75	259.00	3,393.01	-202.75	-1,043.07	-211.85	0.00	0.00	0.00
3,700.00	24.75	259.00	3,483.82	-210.74	-1,084.16	-220.19	0.00	0.00	0.00
3,800.00	24.75	259.00	3,574.63	-218.73	-1,125.26	-228.54	0.00	0.00	0.00
3,900.00	24.75	259.00	3,665.45	-226.72	-1,166.36	-236.89	0.00	0.00	0.00
4,000.00	24.75	259.00	3,756.26	-234.71	-1,207.45	-245.23	0.00	0.00	0.00
4,100.00	24.75	259.00	3,847.08	-242.69	-1,248.55	-253.58	0.00	0.00	0.00
4,200.00	24.75	259.00	3,937.89	-250.68	-1,289.65	-261.93	0.00	0.00	0.00
4,300.00	24.75	259.00	4,028.71	-258.67	-1,330.74	-270.27	0.00	0.00	0.00
4,400.00	24.75	259.00	4,119.52	-266.66	-1,371.84	-278.62	0.00	0.00	0.00
4,500.00	24.75	259.00	4,210.33	-274.65	-1,412.94	-286.97	0.00	0.00	0.00
4,600.00	24.75	259.00	4,301.15	-282.64	-1,454.03	-295.31	0.00	0.00	0.00

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-1HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-1HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,700.00	24.75	259.00	4,391.96	-290.62	-1,495.13	-303.66	0.00	0.00	0.00
4,770.51	24.75	259.00	4,456.00	-296.26	-1,524.11	-309.55	0.00	0.00	0.00
Parkman									
4,800.00	24.75	259.00	4,482.78	-298.61	-1,536.23	-312.01	0.00	0.00	0.00
4,900.00	24.75	259.00	4,573.59	-306.60	-1,577.32	-320.35	0.00	0.00	0.00
4,910.00	24.75	259.00	4,582.67	-307.40	-1,581.43	-321.19	0.00	0.00	0.00
Change Tangent Direction @ 4910.00ft									
5,000.00	24.51	256.92	4,664.49	-315.22	-1,618.11	-329.33	1.00	-0.27	-2.31
5,100.00	24.28	254.56	4,755.56	-325.39	-1,658.13	-339.84	1.00	-0.23	-2.35
5,200.00	24.08	252.17	4,846.79	-337.10	-1,697.37	-351.90	1.00	-0.20	-2.39
5,300.00	23.92	249.74	4,938.15	-350.37	-1,735.81	-365.51	1.00	-0.16	-2.43
5,400.00	23.80	247.29	5,029.60	-365.18	-1,773.45	-380.65	1.00	-0.12	-2.45
5,500.00	23.72	244.81	5,121.13	-381.53	-1,810.26	-397.32	1.00	-0.08	-2.47
5,600.00	23.68	242.33	5,212.70	-399.42	-1,846.25	-415.52	1.00	-0.04	-2.49
5,700.00	23.68	239.84	5,304.28	-418.84	-1,881.40	-435.24	1.00	0.00	-2.49
5,800.00	23.72	237.35	5,395.85	-439.78	-1,915.70	-456.48	1.00	0.04	-2.49
5,900.00	23.80	234.88	5,487.38	-462.23	-1,949.13	-479.23	1.00	0.08	-2.47
6,000.00	23.91	232.42	5,578.84	-486.20	-1,981.70	-503.48	1.00	0.12	-2.46
6,100.00	24.07	229.99	5,670.20	-511.67	-2,013.38	-529.22	1.00	0.16	-2.43
6,133.74	24.13	229.18	5,701.00	-520.60	-2,023.87	-538.24	1.00	0.18	-2.41
Sussex									
6,200.00	24.26	227.59	5,761.44	-538.64	-2,044.17	-556.46	1.00	0.20	-2.39
6,300.00	24.49	225.24	5,852.53	-567.09	-2,074.06	-585.17	1.00	0.23	-2.36
6,396.67	24.75	223.00	5,940.41	-596.00	-2,102.09	-614.32	1.00	0.27	-2.31
Hold Tangent @ 6396.67ft									
6,400.00	24.75	223.00	5,943.43	-597.02	-2,103.04	-615.35	0.00	0.00	0.00
6,500.00	24.75	223.00	6,034.25	-627.64	-2,131.59	-646.22	0.00	0.00	0.00
6,600.00	24.75	223.00	6,125.06	-658.26	-2,160.14	-677.08	0.00	0.00	0.00
6,700.00	24.75	223.00	6,215.88	-688.88	-2,188.69	-707.95	0.00	0.00	0.00
6,800.00	24.75	223.00	6,306.69	-719.50	-2,217.25	-738.82	0.00	0.00	0.00
6,900.00	24.75	223.00	6,397.50	-750.12	-2,245.80	-769.68	0.00	0.00	0.00
7,000.00	24.75	223.00	6,488.32	-780.73	-2,274.35	-800.55	0.00	0.00	0.00
7,100.00	24.75	223.00	6,579.13	-811.35	-2,302.90	-831.42	0.00	0.00	0.00
7,200.00	24.75	223.00	6,669.95	-841.97	-2,331.46	-862.29	0.00	0.00	0.00
7,300.00	24.75	223.00	6,760.76	-872.59	-2,360.01	-893.15	0.00	0.00	0.00
7,400.00	24.75	223.00	6,851.58	-903.21	-2,388.56	-924.02	0.00	0.00	0.00
7,500.00	24.75	223.00	6,942.39	-933.83	-2,417.11	-954.89	0.00	0.00	0.00
7,568.31	24.75	223.00	7,004.43	-954.74	-2,436.62	-975.97	0.00	0.00	0.00
KOP @ 7568.31ft :: DLS = 8°/100'									
7,600.00	23.03	227.61	7,033.40	-963.78	-2,445.72	-985.08	8.00	-5.42	14.55
7,700.00	18.80	246.79	7,126.90	-983.35	-2,475.03	-1,004.91	8.00	-4.24	19.18
7,800.00	17.33	272.37	7,222.12	-989.09	-2,504.76	-1,010.91	8.00	-1.47	25.57
7,900.00	19.27	297.30	7,317.21	-980.89	-2,534.35	-1,002.97	8.00	1.94	24.94
8,000.00	23.79	315.44	7,410.31	-958.92	-2,563.21	-981.25	8.00	4.53	18.13
8,100.00	29.75	327.38	7,499.61	-923.59	-2,590.78	-946.17	8.00	5.96	11.94
8,141.33	32.45	331.08	7,535.00	-905.25	-2,601.68	-927.92	8.00	6.53	8.95
Sharon Springs									
8,179.81	35.05	334.05	7,567.00	-886.27	-2,611.51	-909.02	8.00	6.75	7.73
Niobrara									
8,200.00	36.44	335.46	7,583.38	-875.60	-2,616.54	-898.40	8.00	6.88	6.98
8,300.00	43.52	341.27	7,659.99	-815.88	-2,639.96	-838.89	8.00	7.08	5.81
8,400.00	50.83	345.72	7,727.94	-745.60	-2,660.61	-768.79	8.00	7.31	4.45

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-1HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-1HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
8,401.68	50.95	345.79	7,729.00	-744.33	-2,660.93	-767.52	8.00	7.39	3.96	
Nio B										
8,500.00	58.27	349.33	7,785.91	-666.11	-2,678.08	-689.46	8.00	7.45	3.60	
8,600.00	65.80	352.39	7,832.78	-578.97	-2,692.02	-602.44	8.00	7.53	3.06	
8,618.11	67.17	352.90	7,840.00	-562.51	-2,694.14	-586.00	8.00	7.57	2.83	
Nio C										
8,700.00	73.39	355.10	7,867.62	-485.88	-2,702.17	-509.44	8.00	7.59	2.69	
8,800.00	81.00	357.61	7,889.77	-388.64	-2,708.33	-412.26	8.00	7.62	2.51	
8,900.00	88.64	0.02	7,898.79	-289.15	-2,710.37	-312.79	8.00	7.63	2.40	
8,920.13	90.18	0.50	7,899.00	-269.02	-2,710.28	-292.66	8.00	7.64	2.38	
End Build @ 8920.13ft - Top of Production										
9,000.00	90.18	0.50	7,898.75	-189.16	-2,709.59	-212.79	0.00	0.00	0.00	
9,100.00	90.18	0.50	7,898.45	-89.16	-2,708.73	-112.79	0.00	0.00	0.00	
9,200.00	90.18	0.50	7,898.14	10.84	-2,707.86	-12.80	0.00	0.00	0.00	
9,300.00	90.18	0.50	7,897.83	110.83	-2,707.00	87.20	0.00	0.00	0.00	
9,400.00	90.18	0.50	7,897.52	210.83	-2,706.13	187.20	0.00	0.00	0.00	
9,500.00	90.18	0.50	7,897.22	310.82	-2,705.27	287.20	0.00	0.00	0.00	
9,600.00	90.18	0.50	7,896.91	410.82	-2,704.40	387.20	0.00	0.00	0.00	
9,700.00	90.18	0.50	7,896.60	510.81	-2,703.54	487.20	0.00	0.00	0.00	
9,800.00	90.18	0.50	7,896.29	610.81	-2,702.67	587.20	0.00	0.00	0.00	
9,900.00	90.18	0.50	7,895.99	710.81	-2,701.81	687.20	0.00	0.00	0.00	
10,000.00	90.18	0.50	7,895.68	810.80	-2,700.94	787.20	0.00	0.00	0.00	
10,100.00	90.18	0.50	7,895.37	910.80	-2,700.08	887.20	0.00	0.00	0.00	
10,200.00	90.18	0.50	7,895.06	1,010.79	-2,699.21	987.20	0.00	0.00	0.00	
10,300.00	90.18	0.50	7,894.76	1,110.79	-2,698.35	1,087.20	0.00	0.00	0.00	
10,400.00	90.18	0.50	7,894.45	1,210.79	-2,697.48	1,187.20	0.00	0.00	0.00	
10,500.00	90.18	0.50	7,894.14	1,310.78	-2,696.62	1,287.20	0.00	0.00	0.00	
10,600.00	90.18	0.50	7,893.83	1,410.78	-2,695.75	1,387.20	0.00	0.00	0.00	
10,700.00	90.18	0.50	7,893.53	1,510.77	-2,694.89	1,487.20	0.00	0.00	0.00	
10,800.00	90.18	0.50	7,893.22	1,610.77	-2,694.02	1,587.20	0.00	0.00	0.00	
10,900.00	90.18	0.50	7,892.91	1,710.76	-2,693.16	1,687.20	0.00	0.00	0.00	
11,000.00	90.18	0.50	7,892.60	1,810.76	-2,692.29	1,787.20	0.00	0.00	0.00	
11,100.00	90.18	0.50	7,892.30	1,910.76	-2,691.43	1,887.20	0.00	0.00	0.00	
11,200.00	90.18	0.50	7,891.99	2,010.75	-2,690.56	1,987.20	0.00	0.00	0.00	
11,300.00	90.18	0.50	7,891.68	2,110.75	-2,689.70	2,087.20	0.00	0.00	0.00	
11,400.00	90.18	0.50	7,891.37	2,210.74	-2,688.83	2,187.19	0.00	0.00	0.00	
11,500.00	90.18	0.50	7,891.06	2,310.74	-2,687.97	2,287.19	0.00	0.00	0.00	
11,600.00	90.18	0.50	7,890.76	2,410.73	-2,687.10	2,387.19	0.00	0.00	0.00	
11,700.00	90.18	0.50	7,890.45	2,510.73	-2,686.24	2,487.19	0.00	0.00	0.00	
11,800.00	90.18	0.50	7,890.14	2,610.73	-2,685.37	2,587.19	0.00	0.00	0.00	
11,900.00	90.18	0.50	7,889.83	2,710.72	-2,684.51	2,687.19	0.00	0.00	0.00	
12,000.00	90.18	0.50	7,889.53	2,810.72	-2,683.64	2,787.19	0.00	0.00	0.00	
12,100.00	90.18	0.50	7,889.22	2,910.71	-2,682.78	2,887.19	0.00	0.00	0.00	
12,200.00	90.18	0.50	7,888.91	3,010.71	-2,681.91	2,987.19	0.00	0.00	0.00	
12,300.00	90.18	0.50	7,888.60	3,110.71	-2,681.05	3,087.19	0.00	0.00	0.00	
12,400.00	90.18	0.50	7,888.30	3,210.70	-2,680.18	3,187.19	0.00	0.00	0.00	
12,500.00	90.18	0.50	7,887.99	3,310.70	-2,679.32	3,287.19	0.00	0.00	0.00	
12,600.00	90.18	0.50	7,887.68	3,410.69	-2,678.45	3,387.19	0.00	0.00	0.00	
12,700.00	90.18	0.50	7,887.37	3,510.69	-2,677.59	3,487.19	0.00	0.00	0.00	
12,800.00	90.18	0.50	7,887.07	3,610.68	-2,676.72	3,587.19	0.00	0.00	0.00	
12,900.00	90.18	0.50	7,886.76	3,710.68	-2,675.86	3,687.19	0.00	0.00	0.00	
13,000.00	90.18	0.50	7,886.45	3,810.68	-2,674.99	3,787.19	0.00	0.00	0.00	
13,100.00	90.18	0.50	7,886.14	3,910.67	-2,674.13	3,887.19	0.00	0.00	0.00	

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-1HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-1HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,200.00	90.18	0.50	7,885.84	4,010.67	-2,673.26	3,987.19	0.00	0.00	0.00
13,300.00	90.18	0.50	7,885.53	4,110.66	-2,672.40	4,087.19	0.00	0.00	0.00
13,400.00	90.18	0.50	7,885.22	4,210.66	-2,671.53	4,187.19	0.00	0.00	0.00
13,500.00	90.18	0.50	7,884.91	4,310.65	-2,670.67	4,287.18	0.00	0.00	0.00
13,600.00	90.18	0.50	7,884.61	4,410.65	-2,669.80	4,387.18	0.00	0.00	0.00
13,700.00	90.18	0.50	7,884.30	4,510.65	-2,668.94	4,487.18	0.00	0.00	0.00
13,800.00	90.18	0.50	7,883.99	4,610.64	-2,668.07	4,587.18	0.00	0.00	0.00
13,900.00	90.18	0.50	7,883.68	4,710.64	-2,667.21	4,687.18	0.00	0.00	0.00
14,000.00	90.18	0.50	7,883.38	4,810.63	-2,666.34	4,787.18	0.00	0.00	0.00
14,100.00	90.18	0.50	7,883.07	4,910.63	-2,665.48	4,887.18	0.00	0.00	0.00
14,200.00	90.18	0.50	7,882.76	5,010.63	-2,664.61	4,987.18	0.00	0.00	0.00
14,300.00	90.18	0.50	7,882.45	5,110.62	-2,663.75	5,087.18	0.00	0.00	0.00
14,400.00	90.18	0.50	7,882.15	5,210.62	-2,662.88	5,187.18	0.00	0.00	0.00
14,500.00	90.18	0.50	7,881.84	5,310.61	-2,662.02	5,287.18	0.00	0.00	0.00
14,600.00	90.18	0.50	7,881.53	5,410.61	-2,661.15	5,387.18	0.00	0.00	0.00
14,700.00	90.18	0.50	7,881.22	5,510.60	-2,660.29	5,487.18	0.00	0.00	0.00
14,800.00	90.18	0.50	7,880.92	5,610.60	-2,659.42	5,587.18	0.00	0.00	0.00
14,900.00	90.18	0.50	7,880.61	5,710.60	-2,658.56	5,687.18	0.00	0.00	0.00
15,000.00	90.18	0.50	7,880.30	5,810.59	-2,657.70	5,787.18	0.00	0.00	0.00
15,100.00	90.18	0.50	7,879.99	5,910.59	-2,656.83	5,887.18	0.00	0.00	0.00
15,200.00	90.18	0.50	7,879.69	6,010.58	-2,655.97	5,987.18	0.00	0.00	0.00
15,300.00	90.18	0.50	7,879.38	6,110.58	-2,655.10	6,087.18	0.00	0.00	0.00
15,400.00	90.18	0.50	7,879.07	6,210.57	-2,654.24	6,187.18	0.00	0.00	0.00
15,500.00	90.18	0.50	7,878.76	6,310.57	-2,653.37	6,287.18	0.00	0.00	0.00
15,600.00	90.18	0.50	7,878.46	6,410.57	-2,652.51	6,387.17	0.00	0.00	0.00
15,700.00	90.18	0.50	7,878.15	6,510.56	-2,651.64	6,487.17	0.00	0.00	0.00
15,800.00	90.18	0.50	7,877.84	6,610.56	-2,650.78	6,587.17	0.00	0.00	0.00
15,900.00	90.18	0.50	7,877.53	6,710.55	-2,649.91	6,687.17	0.00	0.00	0.00
16,000.00	90.18	0.50	7,877.22	6,810.55	-2,649.05	6,787.17	0.00	0.00	0.00
16,100.00	90.18	0.50	7,876.92	6,910.55	-2,648.18	6,887.17	0.00	0.00	0.00
16,200.00	90.18	0.50	7,876.61	7,010.54	-2,647.32	6,987.17	0.00	0.00	0.00
16,300.00	90.18	0.50	7,876.30	7,110.54	-2,646.45	7,087.17	0.00	0.00	0.00
16,400.00	90.18	0.50	7,875.99	7,210.53	-2,645.59	7,187.17	0.00	0.00	0.00
16,500.00	90.18	0.50	7,875.69	7,310.53	-2,644.72	7,287.17	0.00	0.00	0.00
16,600.00	90.18	0.50	7,875.38	7,410.52	-2,643.86	7,387.17	0.00	0.00	0.00
16,700.00	90.18	0.50	7,875.07	7,510.52	-2,642.99	7,487.17	0.00	0.00	0.00
16,800.00	90.18	0.50	7,874.76	7,610.52	-2,642.13	7,587.17	0.00	0.00	0.00
16,900.00	90.18	0.50	7,874.46	7,710.51	-2,641.26	7,687.17	0.00	0.00	0.00
17,000.00	90.18	0.50	7,874.15	7,810.51	-2,640.40	7,787.17	0.00	0.00	0.00
17,100.00	90.18	0.50	7,873.84	7,910.50	-2,639.53	7,887.17	0.00	0.00	0.00
17,200.00	90.18	0.50	7,873.53	8,010.50	-2,638.67	7,987.17	0.00	0.00	0.00
17,300.00	90.18	0.50	7,873.23	8,110.49	-2,637.80	8,087.17	0.00	0.00	0.00
17,400.00	90.18	0.50	7,872.92	8,210.49	-2,636.94	8,187.17	0.00	0.00	0.00
17,500.00	90.18	0.50	7,872.61	8,310.49	-2,636.07	8,287.17	0.00	0.00	0.00
17,600.00	90.18	0.50	7,872.30	8,410.48	-2,635.21	8,387.17	0.00	0.00	0.00
17,700.00	90.18	0.50	7,872.00	8,510.48	-2,634.34	8,487.16	0.00	0.00	0.00
17,800.00	90.18	0.50	7,871.69	8,610.47	-2,633.48	8,587.16	0.00	0.00	0.00
17,900.00	90.18	0.50	7,871.38	8,710.47	-2,632.61	8,687.16	0.00	0.00	0.00
18,000.00	90.18	0.50	7,871.07	8,810.47	-2,631.75	8,787.16	0.00	0.00	0.00
18,100.00	90.18	0.50	7,870.77	8,910.46	-2,630.88	8,887.16	0.00	0.00	0.00
18,200.00	90.18	0.50	7,870.46	9,010.46	-2,630.02	8,987.16	0.00	0.00	0.00
18,300.00	90.18	0.50	7,870.15	9,110.45	-2,629.15	9,087.16	0.00	0.00	0.00
18,400.00	90.18	0.50	7,869.84	9,210.45	-2,628.29	9,187.16	0.00	0.00	0.00
18,500.00	90.18	0.50	7,869.54	9,310.44	-2,627.42	9,287.16	0.00	0.00	0.00

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-1HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-1HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
18,600.00	90.18	0.50	7,869.23	9,410.44	-2,626.56	9,387.16	0.00	0.00	0.00	
18,700.00	90.18	0.50	7,868.92	9,510.44	-2,625.69	9,487.16	0.00	0.00	0.00	
18,800.00	90.18	0.50	7,868.61	9,610.43	-2,624.83	9,587.16	0.00	0.00	0.00	
18,900.00	90.18	0.50	7,868.31	9,710.43	-2,623.96	9,687.16	0.00	0.00	0.00	
19,000.00	90.18	0.50	7,868.00	9,810.42	-2,623.10	9,787.16	0.00	0.00	0.00	
19,100.00	90.18	0.50	7,867.69	9,910.42	-2,622.23	9,887.16	0.00	0.00	0.00	
19,200.00	90.18	0.50	7,867.38	10,010.41	-2,621.37	9,987.16	0.00	0.00	0.00	
19,300.00	90.18	0.50	7,867.08	10,110.41	-2,620.50	10,087.16	0.00	0.00	0.00	
19,324.46	90.18	0.50	7,867.00	10,134.87	-2,620.29	10,111.62	0.00	0.00	0.00	
TD Well @ 19324.46ft										

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")	
1,523.46	1,500.00	9 5/8" Csg	9-5/8	13-1/2	
8,920.13	7,899.00	Top of Production	5-1/2	7-7/8	

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,323.06	1,309.00	Fox Hills				
4,770.51	4,456.00	Parkman				
6,133.74	5,701.00	Sussex				
8,141.33	7,535.00	Sharon Springs				
8,179.81	7,567.00	Niobrara				
8,401.68	7,729.00	Nio B				
8,618.11	7,840.00	Nio C				

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
250.00	250.00	0.00	0.00	Begin Nudge @ 250.00ft	
1,900.00	1,849.16	-66.95	-344.42	Hold Tangent @ 1900.00ft	
4,910.00	4,582.67	-307.40	-1,581.43	Change Tangent Direction @ 4910.00ft	
6,396.67	5,940.41	-596.00	-2,102.09	Hold Tangent @ 6396.67ft	
7,568.31	7,004.43	-954.74	-2,436.62	KOP @ 7568.31ft :: DLS = 8°/100'	
8,920.13	7,899.00	-269.02	-2,710.28	End Build @ 8920.13ft	
19,324.46	7,867.00	10,134.87	-2,620.29	TD Well @ 19324.46ft	