

US ROCKIES WATTENBERG PLANNING

WELD-NAD83-UTMFT13N

1N-68W-21 WINDSOCK 15-21HZ PAD

WINDSOCK 21-6HZ

Plan A

Plan: Permit Rev-1

SHL Lat/Long: 40.030236/-105.007422

Survey Program: MWD+IFR

Standard Planning Report

26 November, 2018

Project: WELD-NAD83-UTMFT13N
Site: 1N-68W-21 WINDSOCK 15-21HZ PAD
Well: WINDSOCK 21-6HZ
Wellbore: Plan A
Design: Permit Rev-1

US ROCKIES WATTENBERG PLANNING

CASING DETAILS

TVD	MD	Name	Size
1500.00	1521.15	9 5/8" Csg	9-5/8
7889.00	8424.07	Top of Production	5-1/2

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	
3	1280.00	15.45	182.00	1267.56	-137.95	-4.82	1.50	182.00	-137.88	
4	4080.00	15.45	182.00	3966.38	-883.41	-30.85	0.00	0.00	-882.96	
5	4852.50	0.00	0.00	4729.55	-986.87	-34.46	2.00	180.00	-986.37	
6	7295.76	0.00	0.00	7172.81	-986.87	-34.46	0.00	0.00	-986.37	
7	8424.07	90.26	359.30	7889.00	-267.41	-43.22	8.00	359.30	-266.87	
8	13620.18	90.26	359.30	7865.00	4928.25	-106.46	0.00	0.00	4929.18	WINDSOCK 21-6HZ_BHL

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude
WINDSOCK 21-6HZ_SHL	0.00	0.00	0.00	40.030236	-105.007422
WINDSOCK 21-6HZ_BHL	7865.00	4928.25	-106.46	40.043770	-105.007802



SHL
316' FSL
2322' FEL

HEEL
50' FSL
2368' FEL

BHL
50' FNL
2412' FEL

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
1309.00	1322.99	Fox Hills
4456.00	4578.53	Parkman
5701.00	5823.95	Sussex
7535.00	7675.49	Sharon Springs
7567.00	7713.18	Niobrara
7729.00	7932.62	Nio B
7840.00	8154.27	Nio C

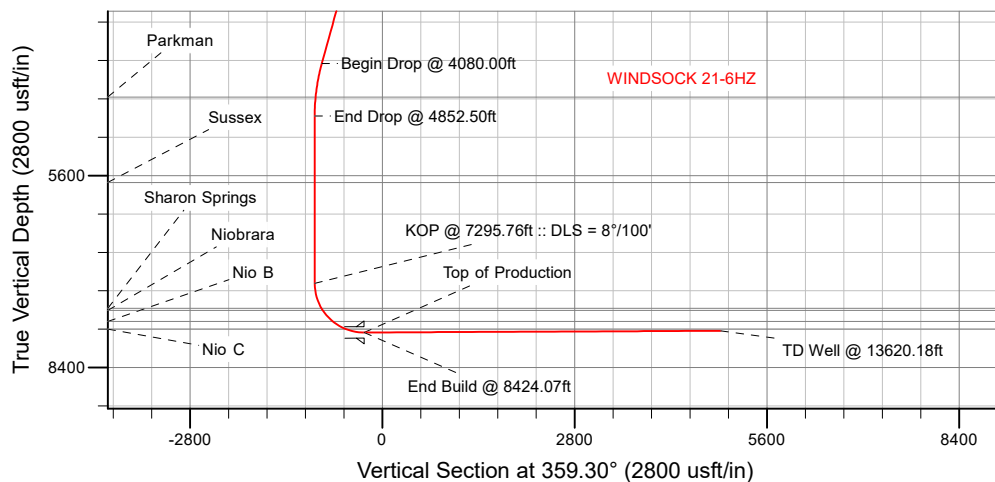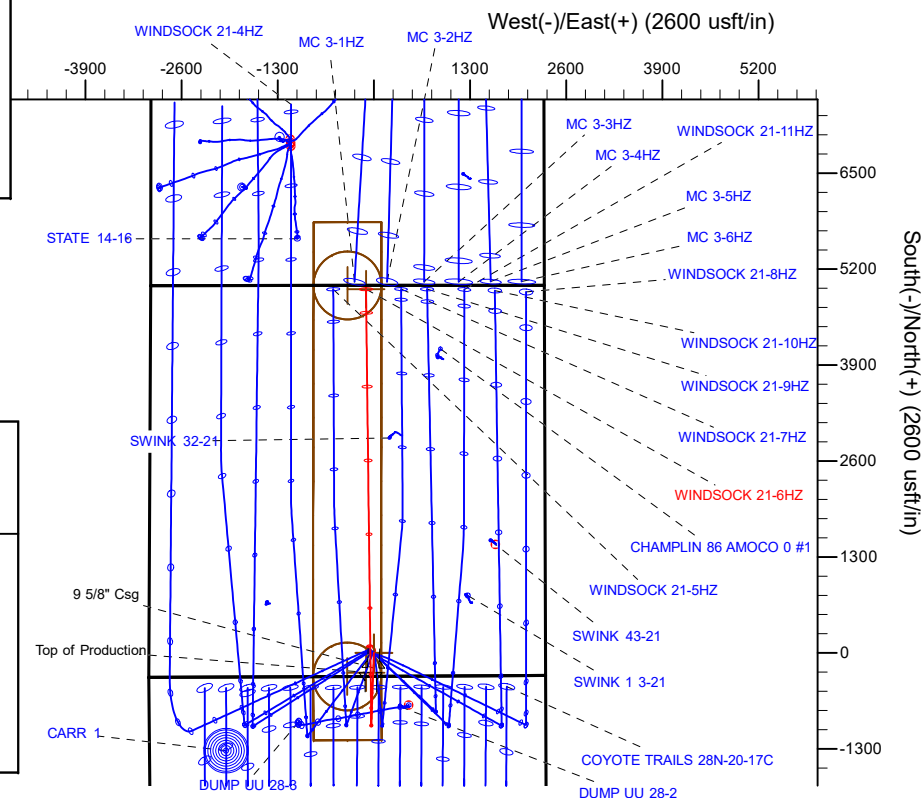

WELL DETAILS: WINDSOCK 21-6HZ

GL = 5222'

RKB = 17' @ 5239.00usft (Drilling Rig)

Plan: Permit Rev-1 (WINDSOCK 21-6HZ/Plan A)

Date: 11/27/2018

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-6HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-6HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Project	WELD-NAD83-UTMFT13N		
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Zone 13N (108 W to 102 W)		

Site	1N-68W-21 WINDSOCK 15-21HZ PAD			
Site Position:		Northing:	14,537,796.91 usft	Latitude: 40.030382
From:	Lat/Long	Easting:	1,638,286.42 usft	Longitude: -105.007610
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence: 0.00 °

Well	WINDSOCK 21-6HZ			
Well Position	+N/-S	-53.16 usft	Northing:	14,537,743.74 usft
	+E/-W	52.63 usft	Easting:	1,638,339.04 usft
Position Uncertainty		3.28 usft	Wellhead Elevation:	Ground Level: 5,222.00 usft

Wellbore	Plan A				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	11/19/2018	8.16	66.49	52,008.60484256

Design	Permit Rev-1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	359.30

Plan Survey Tool Program	Date	11/24/2018		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	1,500.00	Permit Rev-1 (Plan A)	APC_ISCWSA REV 2 MWD+I Fixed:v2:crustal field declinatio
2	1,500.00	13,620.18	Permit Rev-1 (Plan A)	APC_ISCWSA REV 2 MWD+I Fixed:v2:crustal field declinatio

Corporate
Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-6HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-6HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,280.00	15.45	182.00	1,267.56	-137.95	-4.82	1.50	1.50	0.00	182.00	
4,080.00	15.45	182.00	3,966.38	-883.41	-30.85	0.00	0.00	0.00	0.00	
4,852.50	0.00	0.00	4,729.55	-986.87	-34.46	2.00	-2.00	0.00	180.00	
7,295.76	0.00	0.00	7,172.81	-986.87	-34.46	0.00	0.00	0.00	0.00	
8,424.07	90.26	359.30	7,889.00	-267.41	-43.22	8.00	8.00	-0.06	359.30	
13,620.18	90.26	359.30	7,865.00	4,928.25	-106.46	0.00	0.00	0.00	0.00	WINDSOCK 21-6HZ_

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-6HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-6HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin Nudge @ 250.00ft									
300.00	0.75	182.00	300.00	-0.33	-0.01	-0.33	1.50	1.50	0.00
400.00	2.25	182.00	399.96	-2.94	-0.10	-2.94	1.50	1.50	0.00
500.00	3.75	182.00	499.82	-8.17	-0.29	-8.17	1.50	1.50	0.00
600.00	5.25	182.00	599.51	-16.01	-0.56	-16.01	1.50	1.50	0.00
700.00	6.75	182.00	698.96	-26.46	-0.92	-26.45	1.50	1.50	0.00
800.00	8.25	182.00	798.10	-39.50	-1.38	-39.48	1.50	1.50	0.00
900.00	9.75	182.00	896.87	-55.14	-1.93	-55.11	1.50	1.50	0.00
1,000.00	11.25	182.00	995.19	-73.35	-2.56	-73.31	1.50	1.50	0.00
1,100.00	12.75	182.00	1,093.00	-94.13	-3.29	-94.08	1.50	1.50	0.00
1,200.00	14.25	182.00	1,190.24	-117.46	-4.10	-117.40	1.50	1.50	0.00
1,280.00	15.45	182.00	1,267.56	-137.95	-4.82	-137.88	1.50	1.50	0.00
Hold Tangent @ 1280.00ft									
1,300.00	15.45	182.00	1,286.84	-143.27	-5.00	-143.20	0.00	0.00	0.00
1,322.99	15.45	182.00	1,309.00	-149.39	-5.22	-149.32	0.00	0.00	0.00
Fox Hills									
1,400.00	15.45	182.00	1,383.23	-169.90	-5.93	-169.81	0.00	0.00	0.00
1,500.00	15.45	182.00	1,479.61	-196.52	-6.86	-196.42	0.00	0.00	0.00
1,521.15	15.45	182.00	1,500.00	-202.15	-7.06	-202.05	0.00	0.00	0.00
9 5/8" Csg									
1,600.00	15.45	182.00	1,576.00	-223.14	-7.79	-223.03	0.00	0.00	0.00
1,700.00	15.45	182.00	1,672.39	-249.77	-8.72	-249.64	0.00	0.00	0.00
1,800.00	15.45	182.00	1,768.77	-276.39	-9.65	-276.25	0.00	0.00	0.00
1,900.00	15.45	182.00	1,865.16	-303.01	-10.58	-302.86	0.00	0.00	0.00
2,000.00	15.45	182.00	1,961.54	-329.64	-11.51	-329.47	0.00	0.00	0.00
2,100.00	15.45	182.00	2,057.93	-356.26	-12.44	-356.08	0.00	0.00	0.00
2,200.00	15.45	182.00	2,154.32	-382.88	-13.37	-382.69	0.00	0.00	0.00
2,300.00	15.45	182.00	2,250.70	-409.51	-14.30	-409.30	0.00	0.00	0.00
2,400.00	15.45	182.00	2,347.09	-436.13	-15.23	-435.91	0.00	0.00	0.00
2,500.00	15.45	182.00	2,443.48	-462.75	-16.16	-462.52	0.00	0.00	0.00
2,600.00	15.45	182.00	2,539.86	-489.38	-17.09	-489.13	0.00	0.00	0.00
2,700.00	15.45	182.00	2,636.25	-516.00	-18.02	-515.74	0.00	0.00	0.00
2,800.00	15.45	182.00	2,732.64	-542.63	-18.95	-542.35	0.00	0.00	0.00
2,900.00	15.45	182.00	2,829.02	-569.25	-19.88	-568.96	0.00	0.00	0.00
3,000.00	15.45	182.00	2,925.41	-595.87	-20.81	-595.57	0.00	0.00	0.00
3,100.00	15.45	182.00	3,021.79	-622.50	-21.74	-622.18	0.00	0.00	0.00
3,200.00	15.45	182.00	3,118.18	-649.12	-22.67	-648.79	0.00	0.00	0.00
3,300.00	15.45	182.00	3,214.57	-675.74	-23.60	-675.40	0.00	0.00	0.00
3,400.00	15.45	182.00	3,310.95	-702.37	-24.53	-702.01	0.00	0.00	0.00
3,500.00	15.45	182.00	3,407.34	-728.99	-25.46	-728.62	0.00	0.00	0.00
3,600.00	15.45	182.00	3,503.73	-755.61	-26.39	-755.23	0.00	0.00	0.00
3,700.00	15.45	182.00	3,600.11	-782.24	-27.32	-781.84	0.00	0.00	0.00
3,800.00	15.45	182.00	3,696.50	-808.86	-28.25	-808.45	0.00	0.00	0.00
3,900.00	15.45	182.00	3,792.88	-835.48	-29.18	-835.07	0.00	0.00	0.00
4,000.00	15.45	182.00	3,889.27	-862.11	-30.11	-861.68	0.00	0.00	0.00
4,080.00	15.45	182.00	3,966.38	-883.41	-30.85	-882.96	0.00	0.00	0.00
Begin Drop @ 4080.00ft									
4,100.00	15.05	182.00	3,985.68	-888.66	-31.03	-888.22	2.00	-2.00	0.00
4,200.00	13.05	182.00	4,082.68	-912.92	-31.88	-912.47	2.00	-2.00	0.00
4,300.00	11.05	182.00	4,180.47	-933.79	-32.61	-933.32	2.00	-2.00	0.00

Corporate
Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-6HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-6HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,400.00	9.05	182.00	4,278.93	-951.23	-33.22	-950.75	2.00	-2.00	0.00
4,500.00	7.05	182.00	4,377.94	-965.22	-33.71	-964.74	2.00	-2.00	0.00
4,578.53	5.48	182.00	4,456.00	-973.78	-34.01	-973.30	2.00	-2.00	0.00
Parkman									
4,600.00	5.05	182.00	4,477.38	-975.75	-34.07	-975.26	2.00	-2.00	0.00
4,700.00	3.05	182.00	4,577.12	-982.81	-34.32	-982.32	2.00	-2.00	0.00
4,800.00	1.05	182.00	4,677.06	-986.39	-34.45	-985.89	2.00	-2.00	0.00
4,852.50	0.00	0.00	4,729.55	-986.87	-34.46	-986.37	2.00	-2.00	0.00
End Drop @ 4852.50ft									
4,900.00	0.00	0.00	4,777.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,000.00	0.00	0.00	4,877.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,100.00	0.00	0.00	4,977.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,200.00	0.00	0.00	5,077.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,300.00	0.00	0.00	5,177.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,400.00	0.00	0.00	5,277.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,500.00	0.00	0.00	5,377.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,600.00	0.00	0.00	5,477.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,700.00	0.00	0.00	5,577.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,800.00	0.00	0.00	5,677.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
5,823.95	0.00	0.00	5,701.00	-986.87	-34.46	-986.37	0.00	0.00	0.00
Sussex									
5,900.00	0.00	0.00	5,777.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,000.00	0.00	0.00	5,877.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,100.00	0.00	0.00	5,977.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,200.00	0.00	0.00	6,077.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,300.00	0.00	0.00	6,177.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,400.00	0.00	0.00	6,277.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,500.00	0.00	0.00	6,377.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,600.00	0.00	0.00	6,477.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,700.00	0.00	0.00	6,577.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,800.00	0.00	0.00	6,677.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
6,900.00	0.00	0.00	6,777.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
7,000.00	0.00	0.00	6,877.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
7,100.00	0.00	0.00	6,977.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
7,200.00	0.00	0.00	7,077.05	-986.87	-34.46	-986.37	0.00	0.00	0.00
7,295.76	0.00	0.00	7,172.81	-986.87	-34.46	-986.37	0.00	0.00	0.00
KOP @ 7295.76ft :: DLS = 8°/100'									
7,300.00	0.34	359.30	7,177.05	-986.85	-34.46	-986.36	8.00	8.00	0.00
7,400.00	8.34	359.30	7,276.68	-979.30	-34.55	-978.80	8.00	8.00	0.00
7,500.00	16.34	359.30	7,374.30	-957.94	-34.81	-957.45	8.00	8.00	0.00
7,600.00	24.34	359.30	7,467.98	-923.22	-35.24	-922.72	8.00	8.00	0.00
7,675.49	30.38	359.30	7,535.00	-888.54	-35.66	-888.04	8.00	8.00	0.00
Sharon Springs									
7,700.00	32.34	359.30	7,555.93	-875.79	-35.81	-875.29	8.00	8.00	0.00
7,713.18	33.39	359.30	7,567.00	-868.64	-35.90	-868.13	8.00	8.00	0.00
Niobrara									
7,800.00	40.34	359.30	7,636.42	-816.59	-36.53	-816.08	8.00	8.00	0.00
7,900.00	48.34	359.30	7,707.88	-746.76	-37.38	-746.25	8.00	8.00	0.00
7,932.62	50.95	359.30	7,729.00	-721.90	-37.69	-721.39	8.00	8.00	0.00
Nio B									
8,000.00	56.34	359.30	7,768.93	-667.66	-38.35	-667.15	8.00	8.00	0.00
8,100.00	64.34	359.30	7,818.37	-580.84	-39.40	-580.32	8.00	8.00	0.00
8,154.27	68.68	359.30	7,840.00	-531.09	-40.01	-530.56	8.00	8.00	0.00

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-6HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-6HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Nio C									
8,200.00	72.34	359.30	7,855.25	-487.99	-40.53	-487.46	8.00	8.00	0.00
8,300.00	80.34	359.30	7,878.85	-390.90	-41.72	-390.36	8.00	8.00	0.00
8,400.00	88.34	359.30	7,888.71	-291.48	-42.93	-290.93	8.00	8.00	0.00
8,424.07	90.26	359.30	7,889.00	-267.41	-43.22	-266.87	8.00	8.00	0.00
End Build @ 8424.07ft - Top of Production									
8,500.00	90.26	359.30	7,888.65	-191.49	-44.14	-190.94	0.00	0.00	0.00
8,600.00	90.26	359.30	7,888.19	-91.50	-45.36	-90.94	0.00	0.00	0.00
8,700.00	90.26	359.30	7,887.73	8.49	-46.58	9.06	0.00	0.00	0.00
8,800.00	90.26	359.30	7,887.27	108.48	-47.79	109.06	0.00	0.00	0.00
8,900.00	90.26	359.30	7,886.80	208.48	-49.01	209.06	0.00	0.00	0.00
9,000.00	90.26	359.30	7,886.34	308.47	-50.23	309.06	0.00	0.00	0.00
9,100.00	90.26	359.30	7,885.88	408.46	-51.44	409.06	0.00	0.00	0.00
9,200.00	90.26	359.30	7,885.42	508.45	-52.66	509.06	0.00	0.00	0.00
9,300.00	90.26	359.30	7,884.96	608.44	-53.88	609.06	0.00	0.00	0.00
9,400.00	90.26	359.30	7,884.49	708.43	-55.10	709.05	0.00	0.00	0.00
9,500.00	90.26	359.30	7,884.03	808.43	-56.31	809.05	0.00	0.00	0.00
9,600.00	90.26	359.30	7,883.57	908.42	-57.53	909.05	0.00	0.00	0.00
9,700.00	90.26	359.30	7,883.11	1,008.41	-58.75	1,009.05	0.00	0.00	0.00
9,800.00	90.26	359.30	7,882.65	1,108.40	-59.96	1,109.05	0.00	0.00	0.00
9,900.00	90.26	359.30	7,882.18	1,208.39	-61.18	1,209.05	0.00	0.00	0.00
10,000.00	90.26	359.30	7,881.72	1,308.38	-62.40	1,309.05	0.00	0.00	0.00
10,100.00	90.26	359.30	7,881.26	1,408.37	-63.62	1,409.05	0.00	0.00	0.00
10,200.00	90.26	359.30	7,880.80	1,508.37	-64.83	1,509.05	0.00	0.00	0.00
10,300.00	90.26	359.30	7,880.34	1,608.36	-66.05	1,609.04	0.00	0.00	0.00
10,400.00	90.26	359.30	7,879.87	1,708.35	-67.27	1,709.04	0.00	0.00	0.00
10,500.00	90.26	359.30	7,879.41	1,808.34	-68.48	1,809.04	0.00	0.00	0.00
10,600.00	90.26	359.30	7,878.95	1,908.33	-69.70	1,909.04	0.00	0.00	0.00
10,700.00	90.26	359.30	7,878.49	2,008.32	-70.92	2,009.04	0.00	0.00	0.00
10,800.00	90.26	359.30	7,878.03	2,108.32	-72.13	2,109.04	0.00	0.00	0.00
10,900.00	90.26	359.30	7,877.57	2,208.31	-73.35	2,209.04	0.00	0.00	0.00
11,000.00	90.26	359.30	7,877.10	2,308.30	-74.57	2,309.04	0.00	0.00	0.00
11,100.00	90.26	359.30	7,876.64	2,408.29	-75.79	2,409.04	0.00	0.00	0.00
11,200.00	90.26	359.30	7,876.18	2,508.28	-77.00	2,509.04	0.00	0.00	0.00
11,300.00	90.26	359.30	7,875.72	2,608.27	-78.22	2,609.03	0.00	0.00	0.00
11,400.00	90.26	359.30	7,875.26	2,708.26	-79.44	2,709.03	0.00	0.00	0.00
11,500.00	90.26	359.30	7,874.79	2,808.26	-80.65	2,809.03	0.00	0.00	0.00
11,600.00	90.26	359.30	7,874.33	2,908.25	-81.87	2,909.03	0.00	0.00	0.00
11,700.00	90.26	359.30	7,873.87	3,008.24	-83.09	3,009.03	0.00	0.00	0.00
11,800.00	90.26	359.30	7,873.41	3,108.23	-84.30	3,109.03	0.00	0.00	0.00
11,900.00	90.26	359.30	7,872.95	3,208.22	-85.52	3,209.03	0.00	0.00	0.00
12,000.00	90.26	359.30	7,872.48	3,308.21	-86.74	3,309.03	0.00	0.00	0.00
12,100.00	90.26	359.30	7,872.02	3,408.21	-87.96	3,409.03	0.00	0.00	0.00
12,200.00	90.26	359.30	7,871.56	3,508.20	-89.17	3,509.02	0.00	0.00	0.00
12,300.00	90.26	359.30	7,871.10	3,608.19	-90.39	3,609.02	0.00	0.00	0.00
12,400.00	90.26	359.30	7,870.64	3,708.18	-91.61	3,709.02	0.00	0.00	0.00
12,500.00	90.26	359.30	7,870.17	3,808.17	-92.82	3,809.02	0.00	0.00	0.00
12,600.00	90.26	359.30	7,869.71	3,908.16	-94.04	3,909.02	0.00	0.00	0.00
12,700.00	90.26	359.30	7,869.25	4,008.15	-95.26	4,009.02	0.00	0.00	0.00
12,800.00	90.26	359.30	7,868.79	4,108.15	-96.47	4,109.02	0.00	0.00	0.00
12,900.00	90.26	359.30	7,868.33	4,208.14	-97.69	4,209.02	0.00	0.00	0.00
13,000.00	90.26	359.30	7,867.86	4,308.13	-98.91	4,309.02	0.00	0.00	0.00
13,100.00	90.26	359.30	7,867.40	4,408.12	-100.13	4,409.02	0.00	0.00	0.00

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well WINDSOCK 21-6HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5239.00usft (Drilling Rig)
Site:	1N-68W-21 WINDSOCK 15-21HZ PAD	North Reference:	True
Well:	WINDSOCK 21-6HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
13,200.00	90.26	359.30	7,866.94	4,508.11	-101.34	4,509.01	0.00	0.00	0.00	
13,300.00	90.26	359.30	7,866.48	4,608.10	-102.56	4,609.01	0.00	0.00	0.00	
13,400.00	90.26	359.30	7,866.02	4,708.10	-103.78	4,709.01	0.00	0.00	0.00	
13,500.00	90.26	359.30	7,865.56	4,808.09	-104.99	4,809.01	0.00	0.00	0.00	
13,600.00	90.26	359.30	7,865.09	4,908.08	-106.21	4,909.01	0.00	0.00	0.00	
13,620.18	90.26	359.30	7,865.00	4,928.25	-106.46	4,929.18	0.00	0.00	0.00	
TD Well @ 13620.18ft										

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")	
1,521.15	1,500.00	9 5/8" Csg	9-5/8	13-1/2	
8,424.07	7,889.00	Top of Production	5-1/2	7-7/8	

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,322.99	1,309.00	Fox Hills			
4,578.53	4,456.00	Parkman			
5,823.95	5,701.00	Sussex			
7,675.49	7,535.00	Sharon Springs			
7,713.18	7,567.00	Niobrara			
7,932.62	7,729.00	Nio B			
8,154.27	7,840.00	Nio C			

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
250.00	250.00	0.00	0.00	Begin Nudge @ 250.00ft	
1,280.00	1,267.56	-137.95	-4.82	Hold Tangent @ 1280.00ft	
4,080.00	3,966.38	-883.41	-30.85	Begin Drop @ 4080.00ft	
4,852.50	4,729.55	-986.87	-34.46	End Drop @ 4852.50ft	
7,295.76	7,172.81	-986.87	-34.46	KOP @ 7295.76ft :: DLS = 8°/100'	
8,424.07	7,889.00	-267.41	-43.22	End Build @ 8424.07ft	
13,620.18	7,865.00	4,928.25	-106.46	TD Well @ 13620.18ft	