



ELEVATION

NOTES:

1. Temporary silt fence shall be installed prior to any grading work in the area to be protected. Fence shall be maintained throughout the construction period and removed in conjunction with the final grading and site stabilization.
2. Filter fabric shall meet the requirements of material specification 592 Geotextile Table 1 or 2, Class I with equivalent opening size of at least 30 for nonwoven and 50 for woven.
3. Fence posts shall be either wood post with a minimum cross-sectional area of 1.5" X 1.5" or a standard steel post.
4. When splices are necessary make splice at post according to splice detail. Place the end post of the second fence inside the end post of the first fence. Rotate both posts together at least 180 degrees to create a tight seal with the fabric material. Cut the fabric near the bottom of the posts to accommodate the 6 inch flap. Then drive both posts and bury the flap. Compact backfill well.

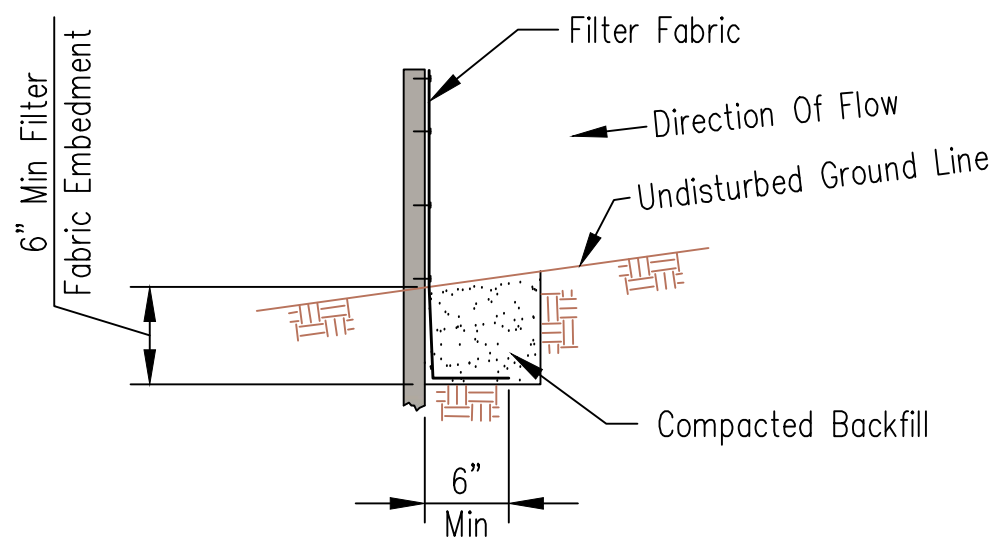

FABRIC ANCHOR DETAIL

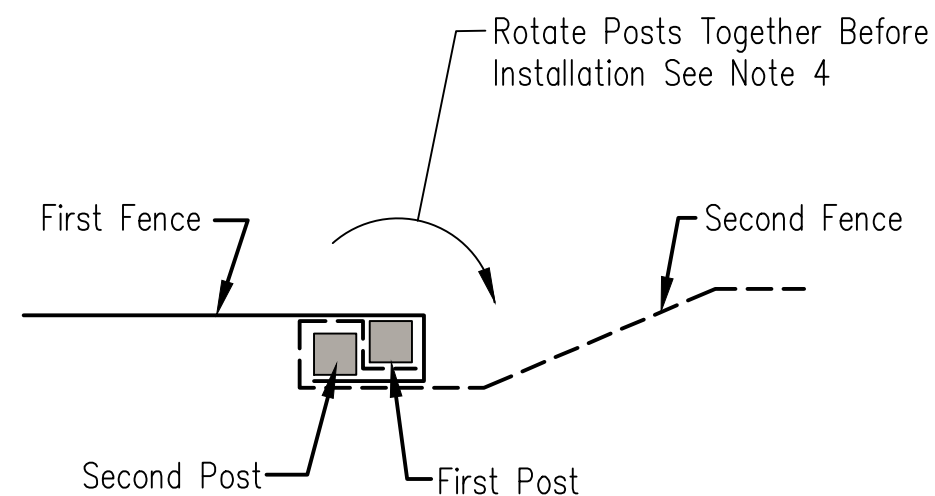

SPLICE DETAIL-PLAN VIEW



United States
Department of
Agriculture

Natural Resources
Conservation Service

NOT TO SCALE

SILT FENCE EROSION CONTROL

HOSS #1
SECTION 34-T1N-R49W-6TH PM, SE-SE
WASHINGTON COUNTY, COLORADO

PROJECT:
18530aa
DATE:
2/24/2020

DRAFT:
TJQ
REVIEW:

