


AJJ	
DVR	
WRS	✓
HHM	OIL AND (
JAM	OF THE STATE OF COLORADO
JJD	✓
FILE	

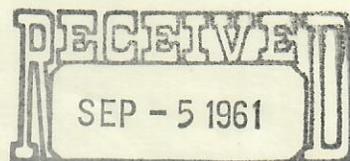

OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

OIL & GAS
CONSERVATION COMMISSION

SUNDRY NOTICES AND REPORTS ON WELLS

INSTRUCTIONS

Notice must be given to the Director, and approval obtained in advance of the time when the owner or operator expects to recompleate or abandon a well or to change plans. Within thirty (30) days after recompleation, change of plans, or remedial work, a detailed report of the work done and the results obtained shall be submitted on this form in duplicate for wells on Patented and Federal lands, and in triplicate for wells on State lands. In work that affects only rods, pumps or tubing or other routine work such as, but not limited to, cleaning out to previous total depth, no report is necessary.

Notice of Intention to Recomplete	<input type="checkbox"/>	Report of Remedial Work	<input type="checkbox"/>
Notice of Intention to Change Plans	<input type="checkbox"/>	Report of Recompletion	<input type="checkbox"/>
Plug back and test and Notice of Intention to Abandon Well	<input checked="" type="checkbox"/>	Other	<input type="checkbox"/>

(Check appropriate space)

LEASE NAME U.S.A. Thompson (05482) WELL NO. 1

FIELD Walden Area WILDCAT COUNTY Jackson

LOCATION NE/4, SE/4 Section 8 Township 6N Range 79W Meridian 6th PM
(Quarter Quarter)

1980 feet from S Section Line and 660 feet from E Section Line
N or S E or W

(DETAILS OF WORK)

2934' T.D. Precambrian formation.

Propose to spot cement plugs as follows:	<u>Schlumberger Tops</u>	
2835-2730' W/40 sacks	Carlile	1710'
2655-2590' W/25 "	Greenhorn	1764'
2385-2230' W/60 "	Frontier	1798'
1750-1645' W/40 "	Graneros	1829'
433- 275' W/75 " (10-3/4" casing set 394')	Mowry	2136'
	Dakota	2240'
	Morrison	2383'
	Lower Sundance (Entrada)	2763'
	Triassic	2890'
	Precambrian	2910'
	Sch. T.D. checked	2935'

Will perforate 1 0-3/4" casing from 242 - 247', acidize with 250 gals. mud acid and bail test sand zone (242 to 252' by Gamma Ray & Neutron log). If unproductive will fill hole with heavy mud and plug top of 10-3/4" casing with 10 sacks cement and install dry hole marker.



057-05010

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED: _____ Date Sept 6 1961

Company Amerada Petroleum Corp. Date 9/2/61

Address Box 1250, Casper, Wyo. Phone No. 237-9351

By R.C. Watts Title Dist. Supt.
(Signature) R.C. Watts