

HALLIBURTON

6360 EAST YELLOWSTONE HWY • EVANSVILLE, WY 82636

TEL: 307-472-5757 • FAX: 307-232-2097

Certified Survey Sheet

Customer: **Extraction Oil & Gas**

Well: **GP-CODY FED 20E-15-4 – Original Wellbore**

API: 05-123-50283

Legal: Sec. 20-T05N-R65W

County: Weld

State: Colorado

RKB (Patterson 901): 29'; 4,702.0' MSL

Tie-On (Koltek Surveys): 1,562.30' MD

First Sperry MWD+IFR1+MS Survey: 1,678' MD

Last Sperry MWD+IFR1+MS Survey: 14,423' MD

Straight Line Projection to TD: 14,476' MD

I certify that the attached survey is true and correct to the best of my knowledge.



02-19-2020

Kansa Becker
Well Design Senior Technical Professional

HALLIBURTON SPERRY DRILLING SERVICES

CERTIFIED SURVEY WORK SHEET

OPERATOR:	Extraction Oil & Gas
WELL:	GP-Cody Fed 20E-15-4
FIELD:	Wattenberg
RIG:	Patterson 901
LEGALS:	Sec. 20 T05N-R65W
COUNTY:	Weld
STATE:	Colorado
CAL. METHOD:	Minimum Curvature
MAG. DECL. APPLIED:	7.763
VERTICAL SEC. DIR. :	91.50

SSDS Job Number :	CA-XX-0906221578
Start Date of Job :	2/16/2020
End Date of Job :	2/18/2020
Lead Directional Drillers	
Other SDS DD's :	
SDS MWD Engineers :	Jonathan Davis
	Pedro Herrera

	Main Hole =====>		1st Side Track =====>		2nd Side Track =====>		3rd Side Track =====>		4th Side Track =====>	
	0.00	Tie On		Tie On		Tie On		Tie On		Tie On
First Surface Survey	142.30									
Last Surface Survey	1562.30									
First Intermediate Survey	1678.00	MWD								
KOP Depth	6456.00	KOP		KOP-ST1		KOP-ST2		KOP-ST3		KOP-ST4
Last Intermediate Survey	7407.00	MWD								
First Lateral Survey Depth	7501.00	MWD		MWD		MWD		MWD		MWD
Last Lateral Survey Depth	14423.00	MWD		MWD		MWD		MWD		MWD
Bit Extrapolation to TD	14476.00	T.D.		T.D.		T.D.		T.D.		T.D.

The following Halliburton Sperry Drilling Services personnel listed below, do certify the above survey information to be accurate :

Print Name : Pedro Herrera Print Name : Print Name :

Sign Name : *Pedro Herrera* Sign Name : Sign Name :

Print Name : Jonathan Davis Print Name : Print Name :

Sign Name : *Jonathan Davis* Sign Name : Sign Name :

Examples of	TieOn	Tie On to Surface Casing (Assumed Vertical), Tie On to existing MWD Survey (prior drilled hole)
Survey Types:	MWD	Sperry Drilling Services (SDS) Measurement While Drilling (MWD) Survey's
	ESS	Sperry Drilling Services (SDS) Electronic Survey System (ESS) Survey's
	Gyro	Gyro Survey's ; Provided by third party vendor, or by Sperry Drilling Services (SDS)
	SS	Single Shot (SS) Survey's ; Provided by Sperry Drilling Services (SDS) or third party vendor.

Job# 906221578
Patterson 901

Extraction Oil & Gas

Weld County, CO Sec. 20-T05N-R65W (GP Pad)

API# 05-123-50283

GP-CODY FED 20E-15-4

SHL: 706' FNL 1305' FEL

OWB_50283

Design: Corrected Surveys

Sperry Drilling Services

Combo Report

19 February, 2020

Well Coordinates: 40.389920
-104.682510

North American Datum 1983
Colorado Northern Zone
1,385,937.90 N
3,227,710.06 E

Ground Level: 4,673.00 usft

Geodetic Scale Factor Applied

Local Coordinate Origin:

Viewing Datum:

TVDs to System:

North Reference:

Unit System:

Geodetic Scale Factor Applied

Version: 5000.15 Build: 91E

Report Version: Midcon Combo v1.15

Centered on Well GP-CODY FED 20E-15-4

KB = 29' @ 4702.00usft (Patterson 901)

N

True


Dec-Deg - API - US Survey Feet - Cust (6 dec)

HALLIBURTON

Project: Weld County, CO
Site: Sec. 20-T05N-R65W (GP Pad)
Well: GP-CODY FED 20E-15-4
Wellbore: OWB_50283
Design: Corrected Surveys

Extraction Oil & Gas Patterson 901

HALLIBURTON
Sperry Drilling

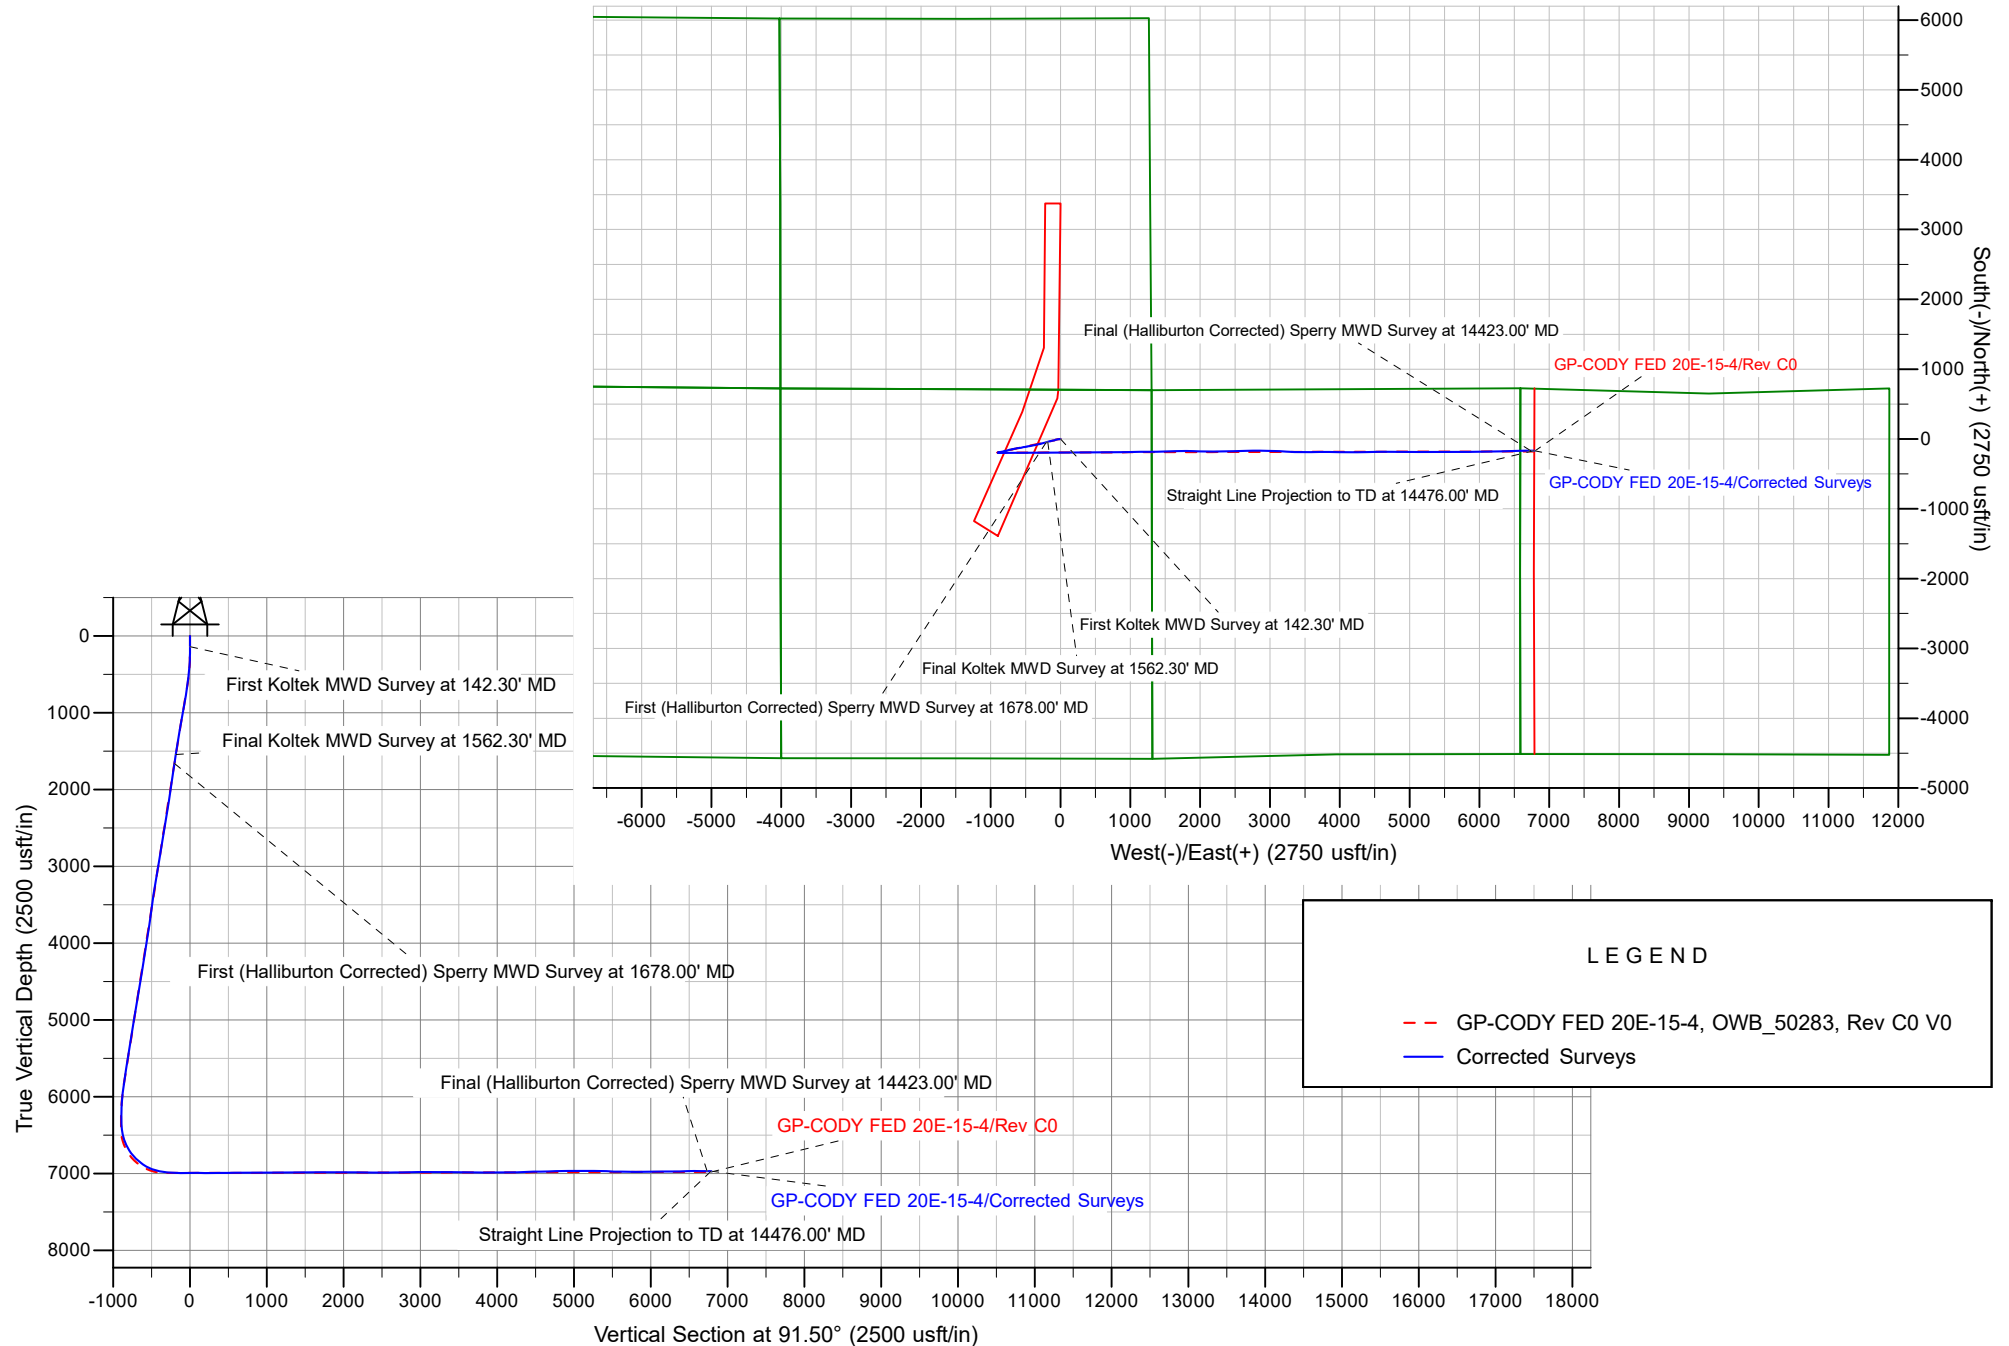

Design Report for GP-CODY FED 20E-15-4 - Corrected Surveys

Measured Depth (usft)	Inclination (°)	True Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Map Coordinates		Dogleg Rate (°/100usft)	Vertical Section (usft)	Toolface Angle (°)	Comments
				Northing (usft)	Easting (usft)	Northing (usft)	Easting (usft)				
0.00	0.00	0.00	0.00	0.00 N	0.00 E	1,385,937.90	3,227,710.06	0.00	0.00	0.00	
142.30	0.26	62.92	142.30	0.15 N	0.29 E	1,385,938.05	3,227,710.35	0.18	0.28	62.92	First Koltek MWD Survey at 142.30' MD
229.30	0.31	302.69	229.30	0.36 N	0.27 E	1,385,938.27	3,227,710.32	0.57	0.26	-147.23	
316.30	1.85	265.51	316.28	0.38 N	1.33 W	1,385,938.27	3,227,708.72	1.86	-1.34	-43.84	
403.30	3.96	262.43	403.16	0.12 S	5.71 W	1,385,937.72	3,227,704.35	2.43	-5.71	-5.77	
491.30	6.28	263.40	490.81	1.08 S	13.51 W	1,385,936.70	3,227,696.56	2.64	-13.47	2.62	
578.30	7.73	261.11	577.16	2.53 S	24.01 W	1,385,935.15	3,227,686.07	1.70	-23.94	-12.04	
665.30	8.96	260.94	663.23	4.50 S	36.49 W	1,385,933.06	3,227,673.62	1.41	-36.36	-1.23	
752.30	10.02	257.86	749.04	7.16 S	50.58 W	1,385,930.27	3,227,659.55	1.35	-50.37	-27.12	
840.30	10.46	251.80	835.64	11.26 S	65.65 W	1,385,926.03	3,227,644.52	1.32	-65.33	-70.78	
927.30	9.71	250.39	921.30	16.19 S	80.06 W	1,385,920.97	3,227,630.15	0.91	-79.61	-162.47	
1,014.30	9.49	256.81	1,007.08	20.29 S	93.96 W	1,385,916.74	3,227,616.30	1.26	-93.39	104.76	
1,102.30	10.33	257.42	1,093.77	23.67 S	108.72 W	1,385,913.23	3,227,601.56	0.96	-108.07	7.42	
1,189.30	9.89	258.13	1,179.42	26.90 S	123.65 W	1,385,909.86	3,227,586.67	0.53	-122.90	164.53	
1,276.30	9.76	256.63	1,265.14	30.14 S	138.13 W	1,385,906.48	3,227,572.22	0.33	-137.30	-117.66	
1,364.30	9.45	257.86	1,351.91	33.39 S	152.45 W	1,385,903.11	3,227,557.93	0.42	-151.53	147.10	
1,451.30	9.93	259.88	1,437.67	36.21 S	166.82 W	1,385,900.16	3,227,543.59	0.68	-165.81	36.31	
1,538.30	9.18	256.37	1,523.46	39.16 S	180.95 W	1,385,897.07	3,227,529.49	1.09	-179.86	-143.88	
1,562.30	9.44	256.02	1,547.14	40.09 S	184.72 W	1,385,896.11	3,227,525.73	1.11	-183.61	-12.46	Final Koltek MWD Survey at 1562.30' MD
1,678.00	9.11	254.42	1,661.33	44.84 S	202.75 W	1,385,891.19	3,227,507.74	0.36	-201.51	-142.78	First (Halliburton Corrected) Sperry MWD Survey at 1678.00' MD
1,773.00	8.97	253.29	1,755.15	48.99 S	217.09 W	1,385,886.91	3,227,493.44	0.24	-215.73	-128.81	
1,869.00	8.86	252.05	1,849.99	53.42 S	231.29 W	1,385,882.35	3,227,479.28	0.23	-229.81	-120.40	
1,964.00	8.39	250.54	1,943.92	57.98 S	244.78 W	1,385,877.66	3,227,465.83	0.55	-243.18	-155.02	
2,059.00	9.39	255.57	2,037.78	62.22 S	258.82 W	1,385,873.29	3,227,451.83	1.33	-257.11	40.36	
2,155.00	9.10	255.40	2,132.53	66.09 S	273.75 W	1,385,869.29	3,227,436.94	0.30	-271.93	-174.70	
2,250.00	10.03	259.19	2,226.21	69.53 S	289.15 W	1,385,865.70	3,227,421.57	1.18	-287.23	35.98	
2,345.00	9.06	257.96	2,319.89	72.65 S	304.59 W	1,385,862.45	3,227,406.16	1.04	-302.59	-168.73	
2,440.00	8.38	254.85	2,413.79	76.02 S	318.59 W	1,385,858.95	3,227,392.20	0.87	-316.49	-146.79	
2,535.00	10.12	258.60	2,507.56	79.48 S	333.45 W	1,385,855.36	3,227,377.37	1.94	-331.26	20.97	
2,631.00	9.79	258.34	2,602.11	82.79 S	349.72 W	1,385,851.89	3,227,361.14	0.35	-347.43	-172.37	
2,725.00	9.68	259.29	2,694.76	85.88 S	365.31 W	1,385,848.66	3,227,345.57	0.21	-362.94	124.87	
2,821.00	9.55	259.03	2,789.41	88.89 S	381.06 W	1,385,845.50	3,227,329.85	0.14	-378.60	-161.66	
2,916.00	8.89	257.28	2,883.18	92.01 S	395.95 W	1,385,842.25	3,227,314.99	0.75	-393.41	-157.84	
3,012.00	10.31	259.41	2,977.83	95.22 S	411.63 W	1,385,838.89	3,227,299.34	1.52	-409.00	15.10	
3,107.00	9.61	259.50	3,071.40	98.23 S	427.79 W	1,385,835.74	3,227,283.21	0.74	-425.07	178.77	
3,203.00	8.65	257.02	3,166.18	101.31 S	442.70 W	1,385,832.52	3,227,268.33	1.08	-439.90	-158.93	

Design Report for GP-CODY FED 20E-15-4 - Corrected Surveys

Measured Depth (usft)	Inclination (°)	True Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Map Coordinates		Dogleg Rate (°/100usft)	Vertical Section (usft)	Toolface Angle (°)	Comments
Northing (usft)	Easting (usft)	Northing (usft)	Easting (usft)								
3,297.00	10.60	261.23	3,258.86	104.21 S	458.14 W	1,385,829.47	3,227,252.92	2.20	-455.25	21.93	
3,393.00	9.12	258.91	3,353.44	107.02 S	474.33 W	1,385,826.51	3,227,236.76	1.60	-471.37	-166.11	
3,487.00	7.94	256.15	3,446.40	110.01 S	487.94 W	1,385,823.40	3,227,223.17	1.33	-484.90	-162.23	
3,582.00	9.63	260.64	3,540.28	112.88 S	502.16 W	1,385,820.40	3,227,208.98	1.92	-499.03	24.32	
3,677.00	8.34	259.50	3,634.11	115.42 S	516.77 W	1,385,817.72	3,227,194.39	1.37	-513.58	-172.70	
3,773.00	8.10	257.78	3,729.13	118.12 S	530.23 W	1,385,814.90	3,227,180.96	0.36	-526.96	-135.15	
3,868.00	8.06	258.33	3,823.18	120.89 S	543.29 W	1,385,812.01	3,227,167.93	0.09	-539.94	117.63	
3,964.00	8.09	258.32	3,918.23	123.62 S	556.50 W	1,385,809.16	3,227,154.75	0.03	-553.07	-2.69	
4,058.00	7.93	259.04	4,011.31	126.19 S	569.34 W	1,385,806.47	3,227,141.93	0.20	-565.84	148.27	
4,154.00	10.06	263.28	4,106.13	128.43 S	584.17 W	1,385,804.10	3,227,127.12	2.32	-580.61	19.39	
4,248.00	8.70	265.31	4,198.87	129.97 S	599.41 W	1,385,802.41	3,227,111.90	1.49	-595.81	167.33	
4,344.00	9.62	260.77	4,293.65	131.85 S	614.56 W	1,385,800.39	3,227,096.76	1.22	-610.91	-40.41	
4,439.00	8.32	260.00	4,387.48	134.32 S	629.17 W	1,385,797.79	3,227,082.18	1.37	-625.44	-175.10	
4,534.00	10.01	260.50	4,481.27	136.87 S	644.08 W	1,385,795.10	3,227,067.29	1.78	-640.28	2.94	
4,629.00	10.71	257.05	4,574.72	140.22 S	660.83 W	1,385,791.60	3,227,050.58	0.98	-656.93	-43.26	
4,725.00	8.76	256.22	4,669.33	143.96 S	676.62 W	1,385,787.72	3,227,034.82	2.04	-672.63	-176.29	
4,819.00	10.92	259.25	4,761.94	147.32 S	692.32 W	1,385,784.21	3,227,019.15	2.36	-688.23	14.98	
4,913.00	9.00	253.52	4,854.52	151.07 S	708.12 W	1,385,780.32	3,227,003.39	2.30	-703.93	-155.50	
5,030.00	11.23	260.38	4,969.70	155.57 S	728.14 W	1,385,775.63	3,226,983.42	2.16	-723.82	31.79	
5,125.00	9.96	257.06	5,063.08	158.96 S	745.26 W	1,385,772.09	3,226,966.32	1.48	-740.85	-155.95	
5,220.00	8.43	250.55	5,156.86	163.11 S	759.84 W	1,385,767.79	3,226,951.79	1.95	-755.31	-148.97	
5,315.00	9.25	256.09	5,250.73	167.27 S	773.82 W	1,385,763.51	3,226,937.85	1.24	-769.18	48.83	
5,411.00	9.78	261.11	5,345.41	170.38 S	789.36 W	1,385,760.25	3,226,922.33	1.03	-784.63	59.93	
5,506.00	8.60	257.50	5,439.19	173.17 S	804.27 W	1,385,757.33	3,226,907.45	1.38	-799.46	-155.73	
5,601.00	9.63	254.29	5,532.99	176.86 S	818.85 W	1,385,753.51	3,226,892.90	1.21	-813.95	-27.87	
5,696.00	8.75	256.11	5,626.77	180.74 S	833.52 W	1,385,749.49	3,226,878.28	0.98	-828.50	162.62	
5,791.00	9.98	261.28	5,720.51	183.73 S	848.67 W	1,385,746.37	3,226,863.15	1.57	-843.57	36.94	
5,886.00	8.35	258.02	5,814.29	186.41 S	863.55 W	1,385,743.55	3,226,848.29	1.80	-858.38	-163.93	
5,982.00	7.09	254.94	5,909.42	189.39 S	876.10 W	1,385,740.45	3,226,835.78	1.38	-870.84	-163.34	
6,076.00	5.56	254.52	6,002.85	192.12 S	886.09 W	1,385,737.63	3,226,825.82	1.63	-880.76	-178.48	
6,171.00	4.04	251.80	6,097.51	194.39 S	893.70 W	1,385,735.29	3,226,818.22	1.62	-888.31	-172.84	
6,266.00	2.48	200.12	6,192.37	197.36 S	897.59 W	1,385,732.28	3,226,814.36	3.34	-892.12	-142.11	
6,362.00	0.43	7.70	6,288.35	198.96 S	898.25 W	1,385,730.68	3,226,813.71	3.02	-892.74	178.17	
6,456.00	1.94	65.17	6,382.32	197.94 S	896.76 W	1,385,731.71	3,226,815.20	1.86	-891.28	69.44	
6,551.00	11.92	91.70	6,476.52	197.56 S	885.47 W	1,385,732.20	3,226,826.49	10.76	-880.00	31.33	
6,646.00	19.55	93.85	6,567.90	198.92 S	859.76 W	1,385,731.07	3,226,852.20	8.05	-854.27	5.41	
6,742.00	28.09	92.98	6,655.64	201.17 S	821.09 W	1,385,729.17	3,226,890.89	8.90	-815.55	-2.76	

Design Report for GP-CODY FED 20E-15-4 - Corrected Surveys

Measured Depth (usft)	Inclination (°)	True Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Map Coordinates		Dogleg Rate (°/100usft)	Vertical Section (usft)	Toolface Angle (°)	Comments
6,836.00	36.40	92.40	6,735.07	203.50 S	771.04 W	1,385,727.31	3,226,940.96	8.85	-765.45	-2.38	
6,932.00	44.78	87.55	6,807.93	203.24 S	708.67 W	1,385,728.14	3,227,003.32	9.32	-703.12	-22.51	
7,027.00	54.48	85.98	6,869.39	199.09 S	636.51 W	1,385,732.96	3,227,075.44	10.29	-631.08	-7.55	
7,122.00	61.70	88.11	6,919.57	195.00 S	556.03 W	1,385,737.79	3,227,155.88	7.83	-550.74	14.63	
7,217.00	72.43	90.54	6,956.54	194.04 S	468.68 W	1,385,739.55	3,227,243.21	11.54	-463.44	12.28	
7,312.00	81.50	90.67	6,977.95	195.02 S	376.23 W	1,385,739.43	3,227,335.66	9.55	-371.00	0.82	
7,407.00	87.72	90.11	6,986.87	195.66 S	281.70 W	1,385,739.66	3,227,430.19	6.57	-276.48	-5.15	
7,501.00	87.48	89.49	6,990.81	195.33 S	187.78 W	1,385,740.85	3,227,524.09	0.71	-182.61	-111.19	
7,596.00	89.03	90.07	6,993.70	194.97 S	92.83 W	1,385,742.09	3,227,619.03	1.74	-87.70	20.52	
7,692.00	89.29	89.81	6,995.11	194.87 S	3.16 E	1,385,743.08	3,227,715.02	0.38	8.26	-45.00	
7,787.00	89.66	89.76	6,995.98	194.51 S	98.16 E	1,385,744.31	3,227,810.00	0.39	103.21	-7.70	
7,882.00	89.90	89.92	6,996.34	194.25 S	193.15 E	1,385,745.45	3,227,904.99	0.30	198.17	33.69	
8,072.00	91.11	89.05	6,994.67	192.54 S	383.13 E	1,385,748.91	3,228,094.94	0.78	388.04	-35.71	
8,167.00	91.38	89.05	6,992.60	190.96 S	478.10 E	1,385,751.36	3,228,189.88	0.28	482.93	0.00	
8,262.00	90.20	90.01	6,991.29	190.18 S	573.08 E	1,385,753.01	3,228,284.85	1.60	577.86	140.86	
8,358.00	90.81	90.64	6,990.45	190.73 S	669.08 E	1,385,753.35	3,228,380.84	0.91	673.84	45.92	
8,453.00	89.76	88.89	6,989.97	190.34 S	764.07 E	1,385,754.62	3,228,475.82	2.15	768.79	-120.96	
8,548.00	89.97	89.14	6,990.20	188.71 S	859.06 E	1,385,757.13	3,228,570.78	0.34	863.70	49.97	
8,643.00	90.27	89.41	6,990.00	187.50 S	954.05 E	1,385,759.21	3,228,665.76	0.42	958.63	41.99	
8,737.00	89.80	88.01	6,989.94	185.39 S	1,048.02 E	1,385,762.19	3,228,759.70	1.57	1,052.51	-108.56	
8,833.00	90.60	89.60	6,989.61	183.39 S	1,144.00 E	1,385,765.07	3,228,855.65	1.85	1,148.40	63.29	
8,929.00	90.50	88.76	6,988.68	182.01 S	1,239.98 E	1,385,767.33	3,228,951.62	0.88	1,244.32	-96.79	
9,024.00	90.57	89.23	6,987.80	180.35 S	1,334.96 E	1,385,769.87	3,229,046.57	0.50	1,339.22	81.53	
9,119.00	90.81	90.64	6,986.65	180.24 S	1,429.95 E	1,385,770.86	3,229,141.55	1.51	1,434.18	80.33	
9,213.00	90.71	89.11	6,985.41	180.03 S	1,523.94 E	1,385,771.93	3,229,235.53	1.64	1,528.13	-93.72	
9,308.00	90.34	86.46	6,984.54	176.35 S	1,618.86 E	1,385,776.48	3,229,330.41	2.81	1,622.92	-97.95	
9,403.00	90.50	88.67	6,983.84	172.32 S	1,713.76 E	1,385,781.39	3,229,425.27	2.33	1,717.68	85.85	
9,498.00	89.16	91.90	6,984.12	172.79 S	1,808.75 E	1,385,781.80	3,229,520.25	3.68	1,812.65	112.53	
9,593.00	89.19	91.09	6,985.49	175.27 S	1,903.70 E	1,385,780.19	3,229,615.22	0.85	1,907.64	-87.88	
9,689.00	89.43	90.84	6,986.64	176.89 S	1,999.68 E	1,385,779.46	3,229,711.21	0.36	2,003.63	-46.17	
9,783.00	89.43	90.48	6,987.58	177.97 S	2,093.67 E	1,385,779.25	3,229,805.20	0.38	2,097.61	-90.00	
9,878.00	89.53	90.15	6,988.44	178.49 S	2,188.67 E	1,385,779.60	3,229,900.19	0.36	2,192.59	-73.14	
9,973.00	89.50	89.25	6,989.25	177.99 S	2,283.66 E	1,385,780.97	3,229,995.17	0.95	2,287.54	-91.91	
10,068.00	89.93	89.03	6,989.72	176.57 S	2,378.65 E	1,385,783.27	3,230,090.14	0.51	2,382.45	-27.10	
10,163.00	90.60	88.71	6,989.28	174.69 S	2,473.63 E	1,385,786.02	3,230,185.09	0.78	2,477.35	-25.53	
10,259.00	90.71	88.46	6,988.18	172.32 S	2,569.59 E	1,385,789.28	3,230,281.03	0.28	2,573.22	-66.25	
10,354.00	90.71	89.37	6,987.00	170.52 S	2,664.57 E	1,385,791.95	3,230,375.98	0.96	2,668.12	89.99	

Design Report for GP-CODY FED 20E-15-4 - Corrected Surveys

Measured Depth (usft)	Inclination (°)	True Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Map Coordinates		Dogleg Rate (°/100usft)	Vertical Section (usft)	Toolface Angle (°)	Comments
				Northing (usft)	Easting (usft)	Northing (usft)	Easting (usft)				
10,449.00	91.31	87.75	6,985.33	168.14 S	2,759.52 E	1,385,795.21	3,230,470.90	1.82	2,762.97	-69.66	
10,544.00	90.40	91.42	6,983.91	167.45 S	2,854.49 E	1,385,796.78	3,230,565.86	3.98	2,857.89	103.90	
10,639.00	90.40	91.42	6,983.25	169.80 S	2,949.46 E	1,385,795.30	3,230,660.84	0.00	2,952.89	0.00	
10,734.00	89.76	92.09	6,983.12	172.71 S	3,044.41 E	1,385,793.26	3,230,755.81	0.98	3,047.89	133.69	
10,829.00	90.34	92.26	6,983.03	176.32 S	3,139.34 E	1,385,790.53	3,230,850.77	0.64	3,142.88	16.34	
10,924.00	90.20	92.85	6,982.59	180.55 S	3,234.25 E	1,385,787.17	3,230,945.70	0.64	3,237.86	103.35	
11,019.00	90.44	93.28	6,982.06	185.63 S	3,329.11 E	1,385,782.97	3,231,040.60	0.52	3,332.83	60.83	
11,114.00	88.39	90.23	6,983.03	188.54 S	3,424.04 E	1,385,780.94	3,231,135.56	3.87	3,427.80	-123.92	
11,209.00	87.95	89.54	6,986.06	188.35 S	3,518.99 E	1,385,782.00	3,231,230.50	0.86	3,522.72	-122.55	
11,304.00	89.43	89.84	6,988.23	187.84 S	3,613.96 E	1,385,783.39	3,231,325.46	1.59	3,617.64	11.46	
11,399.00	89.33	89.07	6,989.26	186.93 S	3,708.95 E	1,385,785.17	3,231,420.43	0.82	3,712.58	-97.40	
11,494.00	90.07	90.92	6,989.76	186.93 S	3,803.95 E	1,385,786.05	3,231,515.42	2.10	3,807.54	68.21	
11,588.00	89.56	89.88	6,990.06	187.58 S	3,897.94 E	1,385,786.26	3,231,609.41	1.23	3,901.52	-116.12	
11,683.00	91.11	91.35	6,989.50	188.60 S	3,992.93 E	1,385,786.12	3,231,704.40	2.25	3,996.50	43.48	
11,779.00	91.34	90.43	6,987.45	190.09 S	4,088.90 E	1,385,785.52	3,231,800.37	0.99	4,092.47	-75.95	
11,874.00	91.78	89.86	6,984.87	190.33 S	4,183.86 E	1,385,786.15	3,231,895.33	0.76	4,187.41	-52.32	
11,970.00	92.35	89.49	6,981.41	189.79 S	4,279.80 E	1,385,787.58	3,231,991.25	0.71	4,283.30	-32.97	
12,065.00	90.67	88.98	6,978.90	188.52 S	4,374.75 E	1,385,789.72	3,232,086.19	1.85	4,378.19	-163.11	
12,160.00	91.18	88.51	6,977.37	186.44 S	4,469.72 E	1,385,792.68	3,232,181.12	0.73	4,473.06	-42.66	
12,255.00	91.48	88.14	6,975.16	183.66 S	4,564.65 E	1,385,796.33	3,232,276.02	0.50	4,567.89	-50.95	
12,351.00	90.67	90.41	6,973.36	182.45 S	4,660.62 E	1,385,798.43	3,232,371.97	2.51	4,663.79	109.62	
12,446.00	91.21	90.13	6,971.80	182.90 S	4,755.60 E	1,385,798.86	3,232,466.95	0.64	4,758.76	-27.40	
12,542.00	92.08	89.96	6,969.05	182.97 S	4,851.56 E	1,385,799.66	3,232,562.91	0.92	4,854.69	-11.05	
12,636.00	89.70	90.82	6,967.59	183.61 S	4,945.54 E	1,385,799.89	3,232,656.88	2.69	4,948.65	160.13	
12,732.00	90.13	90.61	6,967.73	184.81 S	5,041.53 E	1,385,799.58	3,232,752.88	0.50	5,044.64	-26.03	
12,827.00	90.87	90.57	6,966.90	185.79 S	5,136.52 E	1,385,799.48	3,232,847.87	0.78	5,139.63	-3.09	
12,923.00	88.32	90.73	6,967.58	186.88 S	5,232.51 E	1,385,799.27	3,232,943.86	2.66	5,235.61	176.41	
13,018.00	88.76	90.45	6,970.00	187.86 S	5,327.47 E	1,385,799.17	3,233,038.82	0.55	5,330.56	-32.47	
13,113.00	88.25	89.58	6,972.48	187.88 S	5,422.44 E	1,385,800.02	3,233,133.78	1.06	5,425.50	-120.40	
13,208.00	88.52	89.56	6,975.16	187.17 S	5,517.40 E	1,385,801.61	3,233,228.73	0.28	5,520.41	-4.24	
13,303.00	88.92	89.95	6,977.28	186.76 S	5,612.37 E	1,385,802.89	3,233,323.69	0.59	5,615.34	44.27	
13,397.00	88.96	89.70	6,979.02	186.48 S	5,706.36 E	1,385,804.04	3,233,417.66	0.27	5,709.28	-80.91	
13,493.00	90.10	89.40	6,979.81	185.72 S	5,802.35 E	1,385,805.68	3,233,513.64	1.23	5,805.22	-14.74	
13,588.00	90.67	89.15	6,979.17	184.52 S	5,897.34 E	1,385,807.76	3,233,608.61	0.66	5,900.15	-23.68	
13,684.00	91.14	88.67	6,977.65	182.69 S	5,993.31 E	1,385,810.47	3,233,704.56	0.70	5,996.04	-45.60	
13,779.00	91.92	88.36	6,975.11	180.23 S	6,088.24 E	1,385,813.81	3,233,799.46	0.88	6,090.87	-21.66	

Design Report for GP-CODY FED 20E-15-4 - Corrected Surveys

Measured Depth (usft)	Inclination (°)	True Azimuth (°)	Vertical Depth (usft)	Local Coordinates		Map Coordinates		Dogleg Rate (°/100usft)	Vertical Section (usft)	Toolface Angle (°)	Comments
				Northing (usft)	Easting (usft)	Northing (usft)	Easting (usft)				
13,874.00	89.73	89.48	6,973.75	178.44 S	6,183.21 E	1,385,816.47	3,233,894.40	2.59	6,185.76	152.91	
13,970.00	90.10	88.96	6,973.89	177.14 S	6,279.20 E	1,385,818.66	3,233,990.37	0.66	6,281.68	-54.57	
14,065.00	90.77	88.64	6,973.17	175.15 S	6,374.17 E	1,385,821.53	3,234,085.32	0.78	6,376.57	-25.53	
14,160.00	91.55	88.32	6,971.24	172.63 S	6,469.12 E	1,385,824.92	3,234,180.23	0.89	6,471.42	-22.30	
14,255.00	89.97	88.73	6,969.98	170.18 S	6,564.08 E	1,385,828.24	3,234,275.16	1.72	6,566.28	165.45	
14,351.00	89.36	88.91	6,970.55	168.21 S	6,660.05 E	1,385,831.10	3,234,371.11	0.66	6,662.17	163.56	
14,423.00	89.29	89.16	6,971.39	166.99 S	6,732.04 E	1,385,832.98	3,234,443.08	0.36	6,734.10	105.64	Final (Halliburton Corrected) Sperry MWD Survey at 14423.00' MD
14,476.00	89.29	89.16	6,972.05	166.22 S	6,785.03 E	1,385,834.24	3,234,496.06	0.00	6,787.06	0.00	Straight Line Projection to TD at 14476.00' MD

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
142.30	142.30	0.15	0.29	First Koltek MWD Survey at 142.30' MD
1,562.30	1,547.14	-40.09	-184.72	Final Koltek MWD Survey at 1562.30' MD
1,678.00	1,661.33	-44.84	-202.75	First (Halliburton Corrected) Sperry MWD Survey at 1678.00' MD
14,423.00	6,971.39	-166.99	6,732.04	Final (Halliburton Corrected) Sperry MWD Survey at 14423.00' MD
14,476.00	6,972.05	-166.22	6,785.03	Straight Line Projection to TD at 14476.00' MD

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin		Start TVD (usft)
				+N/_S (usft)	+E/-W (usft)	
Target	Cody-4_PBHL	91.50	Slot	0.00	0.00	0.00

Survey tool program

From (usft)	To (usft)	Survey/Plan	Survey Tool
142.30	1,562.30	Koltek MWD	3_MWD+HRGM
1,678.00	14,423.00	Sperry MWD (Corrected)	3_MWD+IFR1+MS
14,476.00	14,476.00	PTB - No Survey	3_Blind

Design Report for GP-CODY FED 20E-15-4 - Corrected Surveys

Design Targets

Target Name	Dip	Dip							
- hit/miss target	Angle	Dir.	TVD	+N/-S	+E/-W	Northing	Easting		
- Shape	()	()	()	()	()	()	()	Latitude	Longitude
()									

Directional Difficulty Index

Average Dogleg over Survey:	1.71 °/100usft	Maximum Dogleg over Survey:	11.54 °/100usft at 7,217.00 usft
Net Tortousity applicable to Plans:	0.90 °/100usft	Directional Difficulty Index:	6.645

Audit Info

North Reference Sheet for Sec. 20-T05N-R65W (GP Pad) - GP-CODY FED 20E-15-4 - OWB_50283

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to True North Reference.

Vertical Depths are relative to KB = 29' @ 4702.00usft (Patterson 901). Northing and Easting are relative to GP-CODY FED 20E-15-4

Coordinate System is US State Plane 1983, Colorado Northern Zone using datum North American Datum 1983, ellipsoid GRS 1980

Projection method is Lambert Conformal Conic (2 parallel)

Central Meridian is -105.500000°, Longitude Origin:0.000000°, Latitude Origin:40.783333°

False Easting: 3,000,000.00usft, False Northing: 1,000,000.00usft, Scale Reduction: 0.99995979

Grid Coordinates of Well: 1,385,937.90 usft N, 3,227,710.06 usft E

Geographical Coordinates of Well: 40.389920, -104.682510

Grid Convergence at Surface is: 0.53°

Based upon Minimum Curvature type calculations, at a Measured Depth of 14,476.00usft
the Bottom Hole Displacement is 6,787.06usft in the Direction of 91.40° (True).

Magnetic Convergence at surface is: -7.25° (4 January 2020, , BGGM2019)

