

Daily Operations Report


Wellbore Diagram

Well Name:	Carl Allen 15
County, State	Moffat, CO
Legal Description:	NE SE 33-12N-97W
API:	05-081-05472
SHL:	1980' FSL, 330' FEL
Updated By:	Jeff Bluemel
Date Updated:	4/28/2015
Spud Date:	3/19/1962
TD Date:	4/7/1962
IP Date:	7/4/1962
Well TD:	4,649
Orientation:	Vertical
Plug Back MD:	4,440
Bridge Plug MD:	4,440
Producing Frac Jobs:	1

Latitude	40.954987
Longitude	-108.288286

As Of Completion	4/10/1962
-------------------------	-----------

All measurements are in KB
unless otherwise specified.

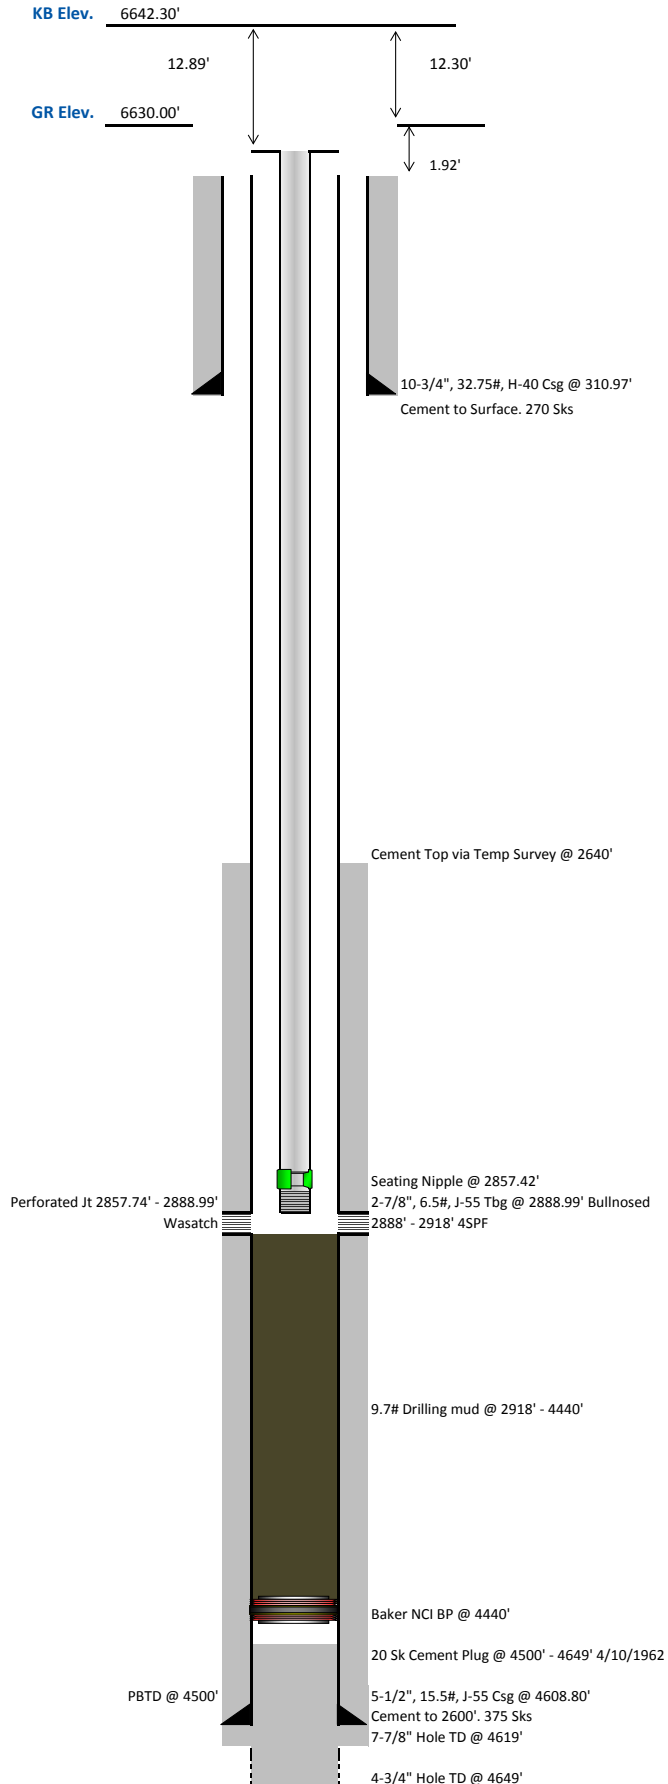

QUESTAR®
Wexpro

Quantity	Description	O.D. (In.)	I.D. (In.)	Length (Ft.)	Top (Ft.)	Depth (Ft.)
	Tbg Spool Top (depth)			12.89		12.89
1	NSSCo. H-1 Tbg Hanger			0.55	12.89	13.44
91 Jts	2-7/8" 6.5# J-55 8rd eue Tbg			2,843.54	13.44	2,856.98
1	2 7/8" 8rd eue Tbg Collar			0.44	2,856.98	2,857.42
1	2 7/8" Seating Nipple			0.32	2,857.42	2,857.74
1 Jt	2-7/8" 6.5# J-55 8rd eue Tbg Perforated Bull Nosed Closed			31.25	2,857.74	2,888.99
		Maximum	Minimum	Total		Total
Calculations				2,876.10		2,888.99

Tubing landed at 2888.99' KBM or 12.89' below KB in a NSCo. 6" nominal Type E tubing head. The bottom perforated Jt. Has 2 rows of 21 & 2 rows of 22 3/8" diameter holes spaced 3" apart.

Signed:		Date Signed:	4/10/1962
----------------	--	---------------------	-----------